


SIXES RIVER WATERSHED ASSESSMENT



Prepared for

The Sixes River Watershed Council

Prepared by

Mike Maguire
South Coast Watershed Council

June 2001

**South Coast Watershed Council
PO Box 666
Gold Beach, Oregon 97444
(541) 247-2755**

TABLE OF CONTENTS

ABSTRACT AND ACKNOWLEDGEMENTS.....	i
INTRODUCTION AND PURPOSE.....	ii
I WATERSHED CHARACTERIZATION.....	1
INTRODUCTION AND SUBWATERSHEDS.....	1-2
LAND OWNERSHIP AND USE.....	2-3
II WATERSHED ISSUES.....	5
BACKGROUND, INTRODUCTION AND RESULTS.....	5
III ECOREGIONS.....	6
BACKGROUND AND INTRODUCTION.....	6-7
DESCRIPTION OF ECOREGIONS.....	7-11
IV CHANNEL HABITAT TYPES.....	12
BACKGROUND.....	12
INTRODUCTION AND METHODOLOGY.....	12-13
CHANNEL SENSITIVITY / RESPONSIVENESS.....	13-14
DESCRIPTION OF CHANNEL HABITAT TYPES.....	15-25
RESULTS.....	26-27
KEY FINDINGS.....	27-28
V FISH & FISH HABITAT.....	29
BACKGROUND.....	29-33
INTRODUCTION.....	33-38
KEY FINDINGS.....	38
VI WATER QUALITY.....	40
BACKGROUND.....	40-43
INTRODUCTION.....	43-45
METHODOLOGY.....	45-46
RESULTS.....	46-49
KEY FINDINGS.....	49-50
VII SEDIMENT SOURCES.....	51
BACKGROUND.....	51-52
INTRODUCTION.....	52-53
METHODOLOGY.....	53-54
RESULTS, KEY FINDINGS, AND OTHER.....	54-55
VIII WETLANDS.....	56
BACKGROUND.....	56-57
INTRODUCTION.....	57-59
METHODOLOGY.....	60-61
RESULTS, KEY FINDINGS AND DISCUSSION.....	61-62

IX	HYDROLOGY.....	63
	BACKGROUND.....	63
	INTRODUCTION.....	64-65
	FORESTRY IMPACTS ON HYDROLOGY.....	65-68
	METHODOLOGY.....	65
	RESULTS AND KEY FINDINGS.....	67
	DISCUSSION.....	67-68
	AGRICULTURE AND RANGELAND IMPACTS ON HYDROLOGY.....	68-72
	METHODOLOGY.....	70-71
	RESULTS AND KEY FINDINGS.....	72
	FOREST AND RURAL ROAD IMPACTS ON HYDROLOGY.....	73-74
	INTRODUCTION.....	73
	METHODOLOGY, RESULTS AND KEY FINDINGS.....	74
X	WATER USE.....	76
	BACKGROUND AND INTRODUCTION.....	76-79
	METHODOLOGY.....	79-80
	RESULTS AND KEY FINDINGS.....	80-83
XI	WATERSHED SYNTHESIS.....	84
XII	APPENDIX.....	86

ABSTRACT

The *Sixes River Watershed Assessment* was prepared for the Sixes River Watershed Council whose members are dedicated to sustaining the health of their watershed. This document contains detailed information about the Sixes River watershed and follows guidelines described in the *Governor's Watershed Enhancement Board's 1999 Draft Oregon Watershed Assessment Manual*. Funding was provided by the Oregon Watershed Enhancement Board, Oregon Department of Environmental Quality, United States Bureau of Land Management, Oregon Department of Agriculture, Curry County Soil and Water Conservation District and Oregon State University Extension Service.

ACKNOWLEDGEMENTS

The completion of the *Sixes River Watershed Assessment* was accomplished through the combined effort of private citizens, watershed council members, contracted technical specialists, and local state and federal government agencies. The South Coast Watershed Council would like to thank the following people who generously provided time and energy to improve the quality of this assessment. Additional people helped whose names are not included below. We also acknowledge them.

CONTRIBUTORS

Cindy Meyers	Sediment and Fish
Matt Swanson	Wetland
Joe Wierzba and Harry Hoogesteger	Fish
Chris Massingill	Watershed Synthesis and Fish
Hyatt Barnes	Computer Support

REVIEWERS

Harry Hoogesteger	South Coast Watershed Council
Cindy Meyers	South Coast Watershed Council
Matt Swanson	South Coast Watershed Council
Chris Massingill	South Coast Watershed Council
Connie Risley	United States Forest Service
Frank Burris	Oregon State University Extension Service
Dale Stewart	United States Bureau of Land Management
Todd Confer	Oregon Department of Fish and Wildlife
Kathy Wiggins	Oregon Department of Forestry
Bruce Follansbee	Lower Rogue Watershed Council
Russ Stauff	Oregon Department of Fish and Wildlife
Lloyd Van Gordon	Oregon Department of Water Resources

INTRODUCTION & PURPOSE

The *Sixes River Watershed Assessment* contains technical information about past and present conditions in the watershed. This document updates and expands on information presented in the *South Coast Watershed Action Plan (1995)* and the *Elk and Sixes Preliminary Watershed Assessment*. This assessment is a resource to promote better understanding of the Sixes River and its drainage area. The assessment was conducted in response to a need for more detailed information on salmonid fish and their habitat as well as water quality within the watershed. Particular emphasis was placed on private lands within the basin. The *Sixes River Watershed Assessment* is based on current information and should be periodically updated, as new information becomes available.

The assessment methodology followed guidance provided by the *Governor's Watershed Enhancement Board's 1999 Draft Oregon Watershed Assessment Manual*. In some instances, diversions were made from this manual based on discussions with technical specialists and/or limitations pertaining to the time and scope of the project. The assessment examined ecoregions, channel habitat types, salmonid fish and their habitat, water quality, sediment sources, wetland conditions, hydrology and water use. Among the components addressed in the Oregon Watershed Assessment Manual that were not included in this assessment was an evaluation of historical conditions, riparian conditions and channel modifications. **Note:** An evaluation of riparian shade and vegetation was conducted on private lands in the Sixes River watershed, but was not complete at the time of the writing of this assessment.

The purpose of this assessment was to compile, summarize and synthesize existing data and information pertaining to Sixes River's watershed conditions. Near completion of this document an interdisciplinary team, comprised of twelve technical specialists, reviewed the individual components of the assessment. The interdisciplinary team later met to discuss key findings, issues and/or concerns related to each of the assessment components. This information was then synthesized to provide a foundation for the prioritization of projects outlined in the *Sixes River Watershed Action Plan (August, 2001)*. The action plan is a complementary document that addresses site specific and watershed wide recommendations for achieving restoration, enhancement and protection goals.

I WATERSHED CHARACTERIZATION

A INTRODUCTION

The Sixes River watershed drains approximately 85,645 acres or 134 square miles of land. Sixes River is situated almost entirely within Curry County except for a small area of the Upper Sixes Mainstem subwatershed that extends into Coos County. This basin is among the larger watersheds on the southern Oregon coast. Flowing in a westerly direction Sixes River crosses Highway 101 and drains into the Pacific Ocean just north of Cape Blanco. Elevations in the watershed range from sea level to approximately 3,315 feet. Major tributaries include the North Fork, Middle Fork, South Fork, Dry Creek, Edson Creek, and Crystal Creek. The upper portion of the basin is characterized by steeply sloped forested areas with narrow valleys and tributary streams that have moderately steep to very steep gradient. Grazing, rural residential development and other agricultural uses are dominant in the lower portion of the basin. Approximately 69% of the watershed is in private ownership.

B SUBWATERSHEDS

The Sixes River watershed was divided into eleven “subwatersheds” for the purpose of this assessment. These subwatersheds generally follow hydrologic boundaries. However, some units include a series of small watersheds that do not drain into a common stream or include segments that are parts of a larger watershed. The delineation of subwatersheds provides a convenient way to refer to areas within the larger watershed.

Delineation of subwatershed boundaries was based on several factors, including preexisting boundaries established by federal agencies and major changes in topography, land use and stream size. Subwatersheds were named after the major tributary within the subwatershed so that references to each subwatershed would be consistent throughout all components of the assessment. In cases where no major tributary exists subwatersheds were named according to their relative location within the watershed (e.g. Lower Sixes Mainstem subwatershed).

Table 1 Sixes River Subwatersheds

Subwatershed	Subwatershed Area (square miles)	Subwatershed Area (acres)
Beaver Area	8.2	5,218
Big & Otter Area	10.7	6,846
Crystal Creek	8.5	5,465
Dry Creek	16.0	10,225
Edson Creek	10.8	6,917
Elephant Rock Area	16.9	10,810
Lower Sixes Mainstem	9.1	5,819
Middle Fork Sixes	7.7	4,941
North Fork Sixes	16.9	10,822
South Fork Sixes	15.1	9,639
Upper Sixes Mainstem	14.0	8,943
Totals	133.9	85,645

C LAND OWNERSHIP AND USE

Land Ownership

Approximately 69% of the land in the Sixes River watershed is in private ownership. Private lands are divided into industrial and non-industrial lands. Industrial private lands account for approximately 42% of the basin whereas non-industrial private lands comprise about 27 % of the total area. Industrial private lands are divided among a small number of stakeholders that own relatively large tracts of land. The major industrial private landowners in the basin include Roseburg Forest Products, Moore Mill Co., Georgia Pacific Co., Westbrook Timber Co., and Menasha Corporation. Public ownership in the watershed is estimated at about 31%. Public lands, managed by the United States Forest Service (USFS), account for approximately 26% of the watershed area whereas the Bureau of Land Management (BLM) manages roughly 2.5% of the basin. State lands comprise about 2% of the basin while county and city lands account for <1%.

Table 2 Land Ownership by Subwatershed (acres)

Subwatershed	BLM	Private Non-Industrial	Private Industrial	USFS	State	County	City	Total Acres
Beaver Area	41	4,467	674		0	36		5,218
Big & Otter Area	41	622	3,303	2,869	11			6,846
Crystal Creek	142	4,477	806		0	40		5,465
Dry Creek	91	71	1,583	8,475	0	5		10,225
Edson Creek	818	1,495	4,474		130			6,917
Elephant Rock Area	425	622	9,188	542	33			10,810
Lower Sixes Mainstem	67	4,531	0		1,134	3	84	5,819
Middle Fork Sixes		185	2,524	2,232	0			4,941
North Fork Sixes		2,847	7,894		81			10,822
South Fork Sixes	444	129	663	8,182	221			9,639
Upper Sixes Mainstem	139	4,086	4,718		0			8,943
Total Acres	2,208	23,532	35,827	22,300	1,610	84	84	85,645


Land Use

Land use in the watershed is divided into two types including (1) forestry and (2) agriculture/range or rural residential. **Note:** Distinguishing between agriculture/range and rural residential was beyond the scope of this assessment and therefore the two are lumped into one land use.

(1) Forestry, the most dominant land use in the watershed, accounts for 93% of the watershed area and includes private industrial and private non-industrial lands in forestry use as well as those lands managed by the USFS and BLM. Although forestry use is common throughout the entire basin it is most prevalent in the middle and upper portions of the watershed.

(2) Agriculture/range and rural residential areas account for approximately 7% of the watershed. These lands are located primarily in the lower watershed although some agriculture/range lands are also found in the Upper Sixes Mainstem and North Fork subwatersheds. Agricultural and range lands are primarily managed for livestock grazing. Major types of livestock include sheep and cattle.

Figure 1 Watershed Land Use Summary

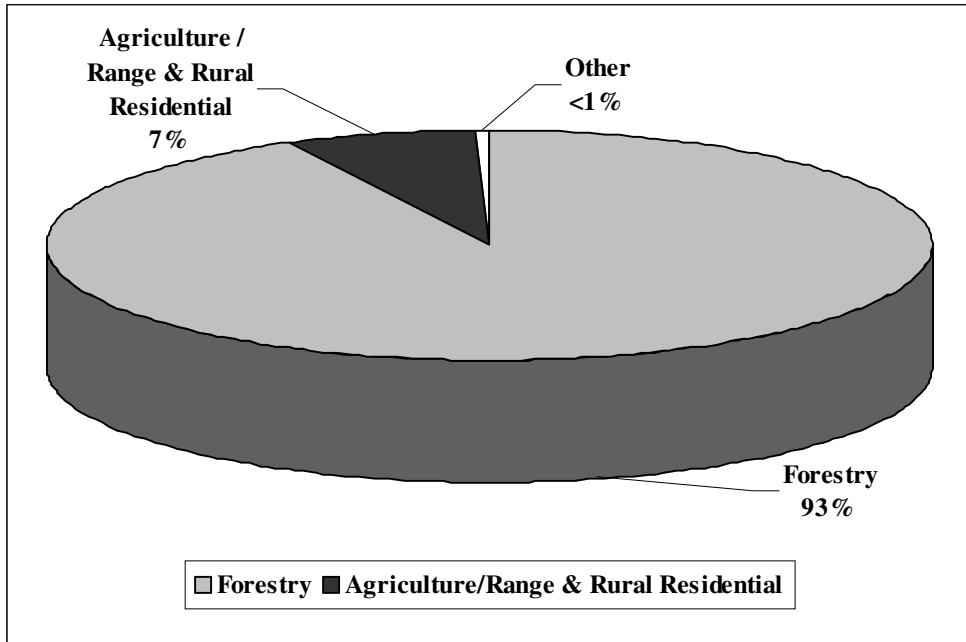

II WATERSHED ISSUES

A BACKGROUND (GWEB 1999)

The issues to be addressed in a watershed assessment typically arise from local efforts to address concerns that often begin at federal and state levels. Listing of fish populations under the federal Endangered Species Act, for example, immediately focuses attention on evaluating habitat quality or hatchery production in the watershed. Likewise, water quality limited stream segments, listed under authority of the federal Clean Water Act, require that watershed management plans or Total Maximum Daily Loads (TMDLs) be developed at the state or local level.

B INTRODUCTION

The identification of watershed issues was intentionally conducted early in the process to help direct the watershed assessment. The purpose of identifying watershed issues was primarily to gain an understanding of the Sixes River Watershed Council's perspective on those practices that may potentially impact salmonid fish habitat and water quality. Critical issues were identified by watershed council members during a council meeting held at the Elk River RV Park on April 28, 1999. The council listed significant land uses within the watershed and their associated impacts to fish habitat and/or water quality. Specific practices were then identified as the primary driver for each issue. The issues addressed reflect both present and legacy practices.

C RESULTS

The Sixes River watershed issues are summarized in two tables: Table 3, Sixes River Regulatory Issues and Table 4 Sixes River Watershed Council Issues.

Table 3 Sixes River Regulatory Issues


Aquatic Resource Issues (Based on federal and state law)	Endangered Species Act		
	Species	Status	
	Coho Salmon	Threatened	
	Clean Water Act – 303 (d) List		
	Tributary / Reach	Boundary	Parameter
	Sixes River	Mouth to Headwaters	Temperature
	South Fork	Mouth to Headwaters	Temperature

GWEB 1999. Oregon Watershed Assessment Manual. Governor's Watershed Enhancement Board, July 1999

Table 4 Sixes River Watershed Council Issues

<u>Land Use</u>	<u>Practice</u>	<u>Issue</u>
Forestry	I Timber harvest by various industrial timber companies	1) Increased sediment inputs: A Loss of pool habitat from increase in sediment B Suffocation of spawning eggs from fine sediments C Loss of topsoil from surface runoff
	II Weed Management - spraying of herbicides & pesticides	1) Degraded water quality - for fish and people
	<i>comments: extensive clearcuts are generally perceived as harmful to the watershed, affecting both water quality and fish habitat</i>	
Road Network	I Road and culvert failures	1) Increased sediment inputs
	<i>comments: "Our river and tributaries have been trashed; the roads are washing into the river."</i>	
Mining	I Current mining at the Sixes Recreational Area	1) Increased turbidity 2) Increased sedimentation 3) Increased temperatures (sediments absorb a lot of sunlight)
	<i>comments: 1) the effects of mining can be seen for at least 3 miles below the site 2) there are often many dredges working all summer</i>	


Sixes River Subwatersheds

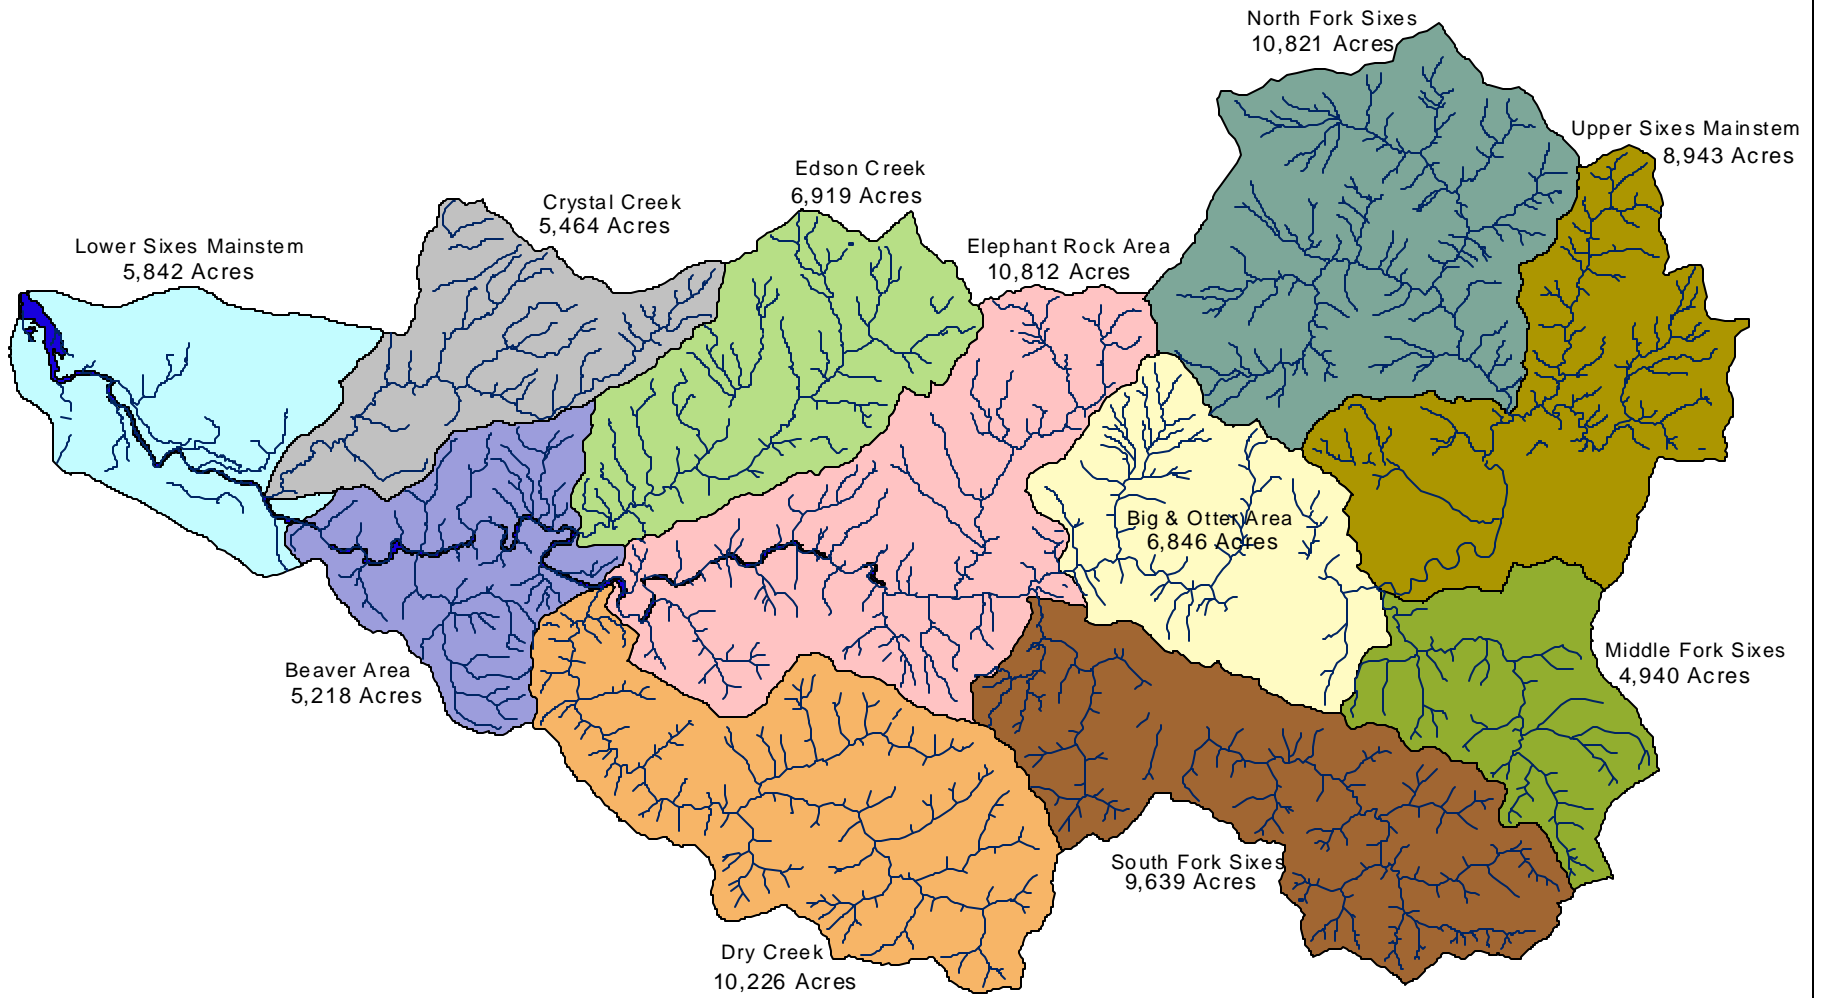


Total Acres = 85,670



Sixes River Ownership

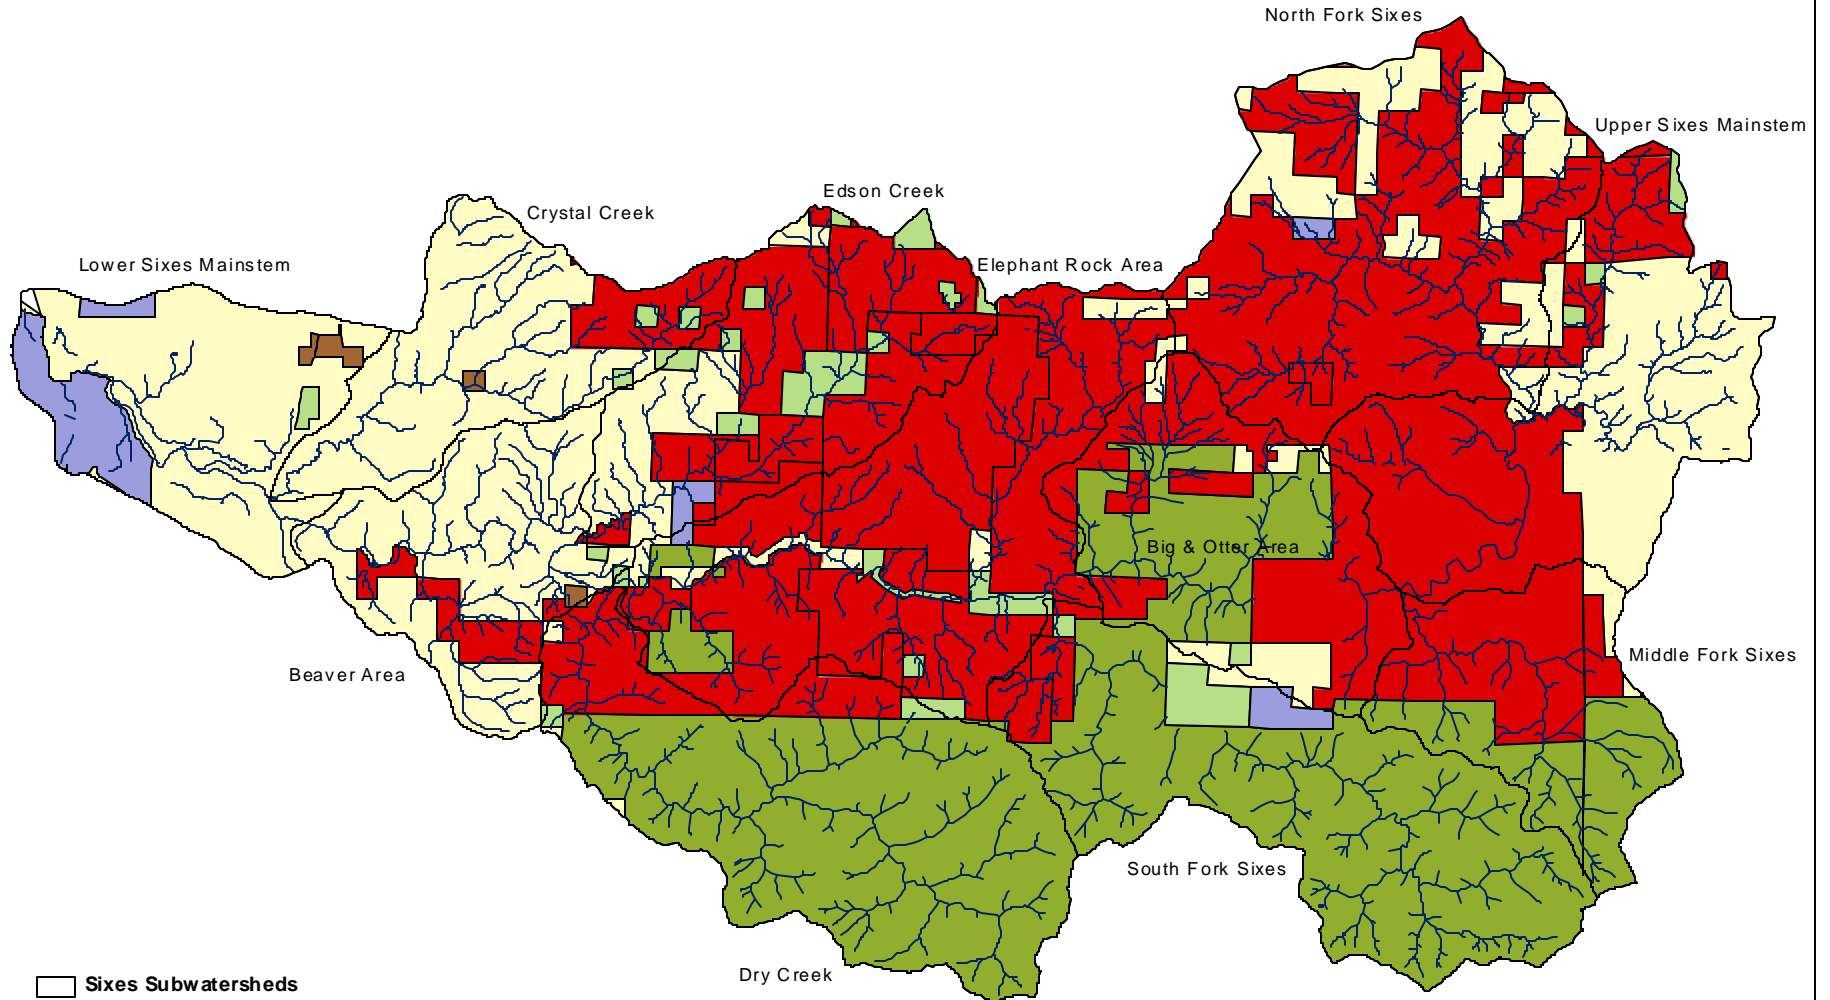

- Sixes Subwatersheds
- △ Sixes Streams
- Sixes Ownership**
- BLM
- County
- Private Industrial
- Private Non Industrial
- State
- USFS



III ECOREGIONS

A BACKGROUND (GWEB 1999 and USEPA, 1996; Omernik, 1987)

The State of Oregon is divided into ecoregions that have been identified based on climate, geology, physiography, vegetation, soils, land use, wildlife, and hydrology. Each ecoregion has characteristic disturbance regimes that shape the form and function of watersheds in the region. They are designed to serve as a spatial framework for the research, assessment, management, and monitoring of ecosystems and ecosystem components. Ecoregions are directly applicable to the immediate needs of state agencies, including the development of biological criteria and water quality standards, and the establishment of management goals for nonpoint-source pollution. They are also relevant to integrated ecosystem management, an ultimate goal of most federal and state resource management agencies. The following table illustrates the hierarchy of ecoregions characterized for North America. Level I is the coarsest level, dividing North America into nine ecological regions, whereas at Level II the continent is subdivided into 32 classes. Level III contains 98 subdivisions in the continental United States whereas Level IV is a subdivision of Level III. Level IV Ecoregion descriptions provide the most detail and are therefore, the focus of this assessment.

Hierarchical Scheme of Ecoregions

Level I	9 Ecological Regions of North America
Level II	32 Ecological Regions of North America
Level III	98 Ecological Regions of North America
Level IV	>98 Ecological Regions (Subdivision of Level III)

(USEPA, 1996; Omernik, 1987)

B INTRODUCTION

The Sixes River watershed is situated within one Level-III Ecoregion that is subdivided into two Level-IV Ecoregions. The Level-III Ecoregion is titled the **Coast Range**. A Brief description of this broad ecoregion is provided in the following paragraph. More detailed descriptions of the two Level-IV Ecoregions are provided in the following pages.

Coast Range

The Coast Range contains highly productive, rain drenched coniferous forests that cover low elevation mountains. Sitka spruce forests originally dominated the fog-shrouded coast, while a mosaic of western red cedar, western hemlock, and seral Douglas-fir blanketed inland areas. Today, Douglas-fir plantations are prevalent on this intensively logged and managed landscape. Within the Coast Range exist several Level IV Ecoregions. A portion of the Sixes River watershed is situated within two of these Level IV Ecoregions. They include the **Coastal Lowlands** and the **Southern Oregon Coastal Mountains**. The Coastal Lowlands include portions of the coastal fringe from Seaside (Oregon) in the north to Gold Beach in the south. The Southern Oregon Coastal Mountains include the southern coastal area from Bandon to Brookings, extending inland from 5 to 20 miles.

Table 5 Ecoregions by Subwatershed (acres)

Subwatershed	Coastal Lowlands		Southern Oregon Coastal Mountains		Total Acres	Total Square Miles
	(acres)	%	(acres)	%		
Beaver Area	489	9	4,729	91	5,218	8.2
Big & Otter Area		0	6,846	100	6,846	10.7
Crystal Creek	718	13	4,746	87	5,464	8.5
Dry Creek		0	10,226	100	10,226	16.0
Edson Creek		0	6,919	100	6,919	10.8
Elephant Rock Area		0	10,812	100	10,812	16.9
Lower Sixes Mainstem	5,842	100		0	5,842	9.1
Middle Fork Sixes		0	4,940	100	4,940	7.7
North Fork Sixes		0	10,821	100	10,821	16.9
South Fork Sixes		0	9,639	100	9,639	15.1
Upper Sixes Mainstem		0	8,943	100	8,943	14.0
Totals	7,049	8	78,621	92	85,670	133.9

C LEVEL IV ECOREGION DESCRIPTIONS

(1) Coastal Lowlands

(8% of Sixes River Watershed)

Physiography

The Coastal Lowlands are characterized by estuarine marshes, meandering streams, shallow coastal lakes, black-water streams, marine terraces, and sand dunes. Streams are very low gradient and often meander widely. Some streams are directly influenced by the tide while others enter shallow coastal lake before entering an outlet(s) to another stream or directly into the ocean. Elevation in this ecoregion ranges from sea level to 300 feet.

Geology & Soil

Geology consists predominantly of quaternary marine and non-marine terrace deposits, beach and dune sands, and alluvium. Soils are deep, silty clay loams to sandy loams.

Climate

Precipitation	Frost Free	Mean Temperature	
Mean Annual (Inches)	Mean Annual (Days)	January Min/Max (°F)	July Min/Max (°F)
60 – 85	200 – 240	36/50	52/68

Wind

Summer	North winds prevail. East wind events associated with extreme high temperatures (>100° F) and high wind speeds (>35 mph) create extreme fire hazard conditions that may result in catastrophic wildfires
Winter	South winds prevail. Extreme high wind events (>100 mph) result in catastrophic wind storms.

(Wiggins 2001)

Runoff

Spring	Partially uniform; rainstorms create periods of higher runoff
Summer	Uniform; runoff gradually declines
Fall	Mostly uniform; runoff gradually increases; higher runoff during late fall rains
Winter	Not uniform; high runoff during rainstorms

Erosion & Peak Flows

Erosion rate is low due to the low gradient of stream channels. However, the extent of streambank erosion, as a result of channel incision and loss of riparian vegetation, is not addressed by the Level IV Ecoregion description. These are mostly depositional areas. Peak flows (50-year recurrence interval, cfs per square mile) are 150 to 200.

Stream Channel Characteristics

Characteristic	Gradient	Stream Size		
		Small	Medium	Large
Substrate	Low	Fines	Fines	Fines / Gravel
Beaver Dams	Low	Many year-round	Many year-round	Some in summer

Natural Disturbances

Extreme windstorms capable of toppling large patches of trees occur about every 35 to 100 years. Catastrophic earthquakes capable of causing the coastal fringe to subside 5 to 20 feet occur about every 300 years. Extreme flood events are triggered by high intensity rainfall. High intensity rainfall and steep slopes trigger landslides.

Fires in the Sitka spruce forest, while infrequent, are usually stand replacing; dominant tree species are not fire tolerant. Catastrophic fires occur about every 50 years (Wiggins 2001). Fires are more frequent in Douglas fir/western hemlock forests, although the interval between fires is quite variable. Native Americans and ranchers both used fire to maintain pastures.

Upland & Riparian Vegetation

Conifers	Sitka spruce, shore pine, grand fir, Douglas-fir, western hemlock, Port Orford cedar and Monterey Cypress
Hardwoods	red alder, big leaf maple, myrtle, and madrone
Shrubs	rhododendron, holly, wax myrtle, willows spp., and ceonothus spp.
Understory	azalea, ribes spp., iris, sea-watch, huckleberry, salal, ferns, skunk cabbage, rushes, sedges, and grasses
Noxious	gorse, blackberry, tansy, scotch broom, European beach grass and thistles spp.

(Wiggins 2001)

Current riparian conifer regeneration is common in areas with good drainage. Sitka spruce can also regenerate in wetter areas where downed logs create an elevated seed bed. Black cottonwood may be found in riparian areas (Agee 1993).

Potential riparian vegetation may include thickets of wind-stunted shore pine, Sitka spruce, and brush (both native and introduced) sometimes alternating with bare sand. Beaver browsing and

dam building may modify some vegetation. In unconfined channels, beaver dams may divide the stream into many channels, creating extensive wetlands.

Land Use

Agricultural land uses include cranberry, blueberry, and organic produce. Rangelands include dairy farms and livestock grazing (sheep, cattle, goats and llamas). Other land uses include rural residential development, tourism, recreation (hunting, fishing, boating, camping, hiking, etc.), forestry, Christmas trees, floral and greenery, rock quarries, light industrial, utility infrastructure (power/communication lines and underground cables, water treatment, etc.) and mining (Wiggins 2001). Many streams in agricultural and residential settings have been diked or channelized.

Other Fog is common in summer.

(2) Southern Oregon Coastal Mountains (92% of Sixes River Watershed)

Physiography

The Southern Oregon Coastal Mountains is a mountainous ecoregion with an ocean-modified climate. It is a transitional area between the Siskiyou Mountains and the Coast Range and is underlain by Jurassic sandstone, metamorphosed sediments, granite, and serpentine. Overall, the geology is complex, like that of the Siskiyou Mountains, but its mountains are lower and not as dissected. The distributions of northern and southern vegetation blend together and species diversity is high. Streams are usually high gradient with steep side-slopes. Watersheds in this ecoregion typically have a high stream density due to the high precipitation, moderately steep gradients and fractured geology.

Geology & Soil

Geology is a complex mix of highly-fractured siltstone, shale, sandstone, gray wackie, granite and serpentine. Soils range from very deep to shallow, silt loam to very gravelly loam.

Climate

Precipitation	Frost Free	Mean Temperature	
Mean Annual (Inches)	Mean Annual (Days)	January Min/Max (°F)	July Min/Max (°F)
70 – 140	170 – 220	36/52	52/76

Wind

Summer	North winds prevail. East wind events associated with extreme high temperatures (>100° F) and high wind speeds (>35 mph) create extreme fire hazard conditions that may result in catastrophic wildfires
Winter	South winds prevail. Extreme high wind events (>100 mph) result in catastrophic wind storms.

(Wiggins 2001)

Runoff

Spring	Partially uniform; rainstorms create periods of higher runoff
Summer	Uniform; runoff gradually declines
Fall	Mostly uniform; runoff gradually increases; higher runoff during late fall rains
Winter	Not uniform; high runoff during rainstorms, especially when snow on ground

Erosion & Peak Flows

Erosion rate is high due to abundant precipitation, high uplift rates, earthquakes, steep slopes, fractured geology, and high landslide occurrence. Landslides are deep-seated earth flows in lower gradient areas or are shallow landslides (often triggering debris slides) in steep headwater channels. Peak flows (50-year recurrence interval, cfs per square mile) are 300 in northern portion to 550 in southern portion of ecoregion.

Stream Channel Characteristics

Characteristic	Gradient	Stream Size		
		Small	Medium	Large
Substrate	Low	Gravel	Gravel	Gravel / cobbles
	High	Gravel / cobbles	Gravel / cobbles	Cobbles / bedrock
Beaver Dams	Low	Some year-round	Few year-round	None
	High	Few in summer	None	None

Natural Disturbances

Fires are more frequent in Douglas fir / western hemlock forests than in their neighboring Sitka spruce forests, although the interval between fires is quite variable. Catastrophic fires occur about 50 years (Wiggins 2001). Large wildfires during late summer and fall once burned large areas within the southern Coast Range. Fires sometimes skipped over streamside areas. Native Americans and ranchers both used fire to maintain pastures. Fire suppression has now eliminated most large wildfires.

Extreme wind storms capable of toppling large patches of trees occur about every 35 to 100 years. Smaller earthquakes capable of triggering landslides occur every decade or so and catastrophic earthquakes occur about every 300 years. Extreme flood events are triggered by high intensity rainfall. High intensity rainfall and steep slopes trigger landslides.

Upland & Riparian Vegetation

Conifers	Douglas-fir, western hemlock, white fir/grand fir, Port Orford cedar, incense cedar, Brewer's spruce, and Sitka spruce
Hardwoods	red alder, big leaf maple, myrtle, madrone, tanoak, cascara-buckthorne, Oregon white oak, Oregon ash, and cottonwood
Shrubs	ceonothus spp., elderberry, manzanita, hazelnut, wax myrtle, and vine maple
Understory	huckleberry, ferns, salmonberry, thimbleberry, skunk cabbage, rushes, sedges, grasses, herbaceous (flowers etc.), fireweed, and poison oak
Noxious	gorse, scotch broom, blackberry, tansy, and thistles spp.

(Wiggins 2001)

Current riparian conifer regeneration is uncommon unless streamside areas are intensively disturbed, followed by control of competing hardwoods and brush. Potential riparian vegetation will vary according to channel confinement. Confined and moderately confined channels may include a narrow band of hardwoods (tanoak, myrtle, red alder) and brush nearest the stream with mainly Douglas fir and hardwoods beyond. Unconfined channels may consist of similar riparian communities although the band of vegetation may be considered moderately wide. Coniferous dominated sites along unconfined channels often occur on infrequently disturbed higher terraces.

Land Use

Forestry, ranching, rural residential development, recreation, rock quarries, greenery, mushrooms and some mining are the predominant land uses (Wiggins 2001).


Other

Irrigation withdrawals result in the partial dewatering of a number of streams during the summer.


REFERENCES

- Agee, J.K. 1993. Fire Ecology of Pacific Northwest Forests. Island Press, Covelo, CA. 493 pp.
- GWEB 1999. Oregon Watershed Assessment Manual. Governor's Watershed Enhancement Board, July 1999
- U.S. Environmental Protection Agency, 1996. Level III ecoregions of the continental United States (revision of Omernik, 1987): Corvallis, Oregon, U.S. Environmental Protection Agency – National Health and Environmental Effects Research Laboratory Map M-1, various scales.
- Wiggins 2001. Personal communication with Katherine L. Wiggins, Forest Practices Forester, Oregon Department of Forestry - Coos District, Coos Bay, Oregon.

Sixes River Ecoregions

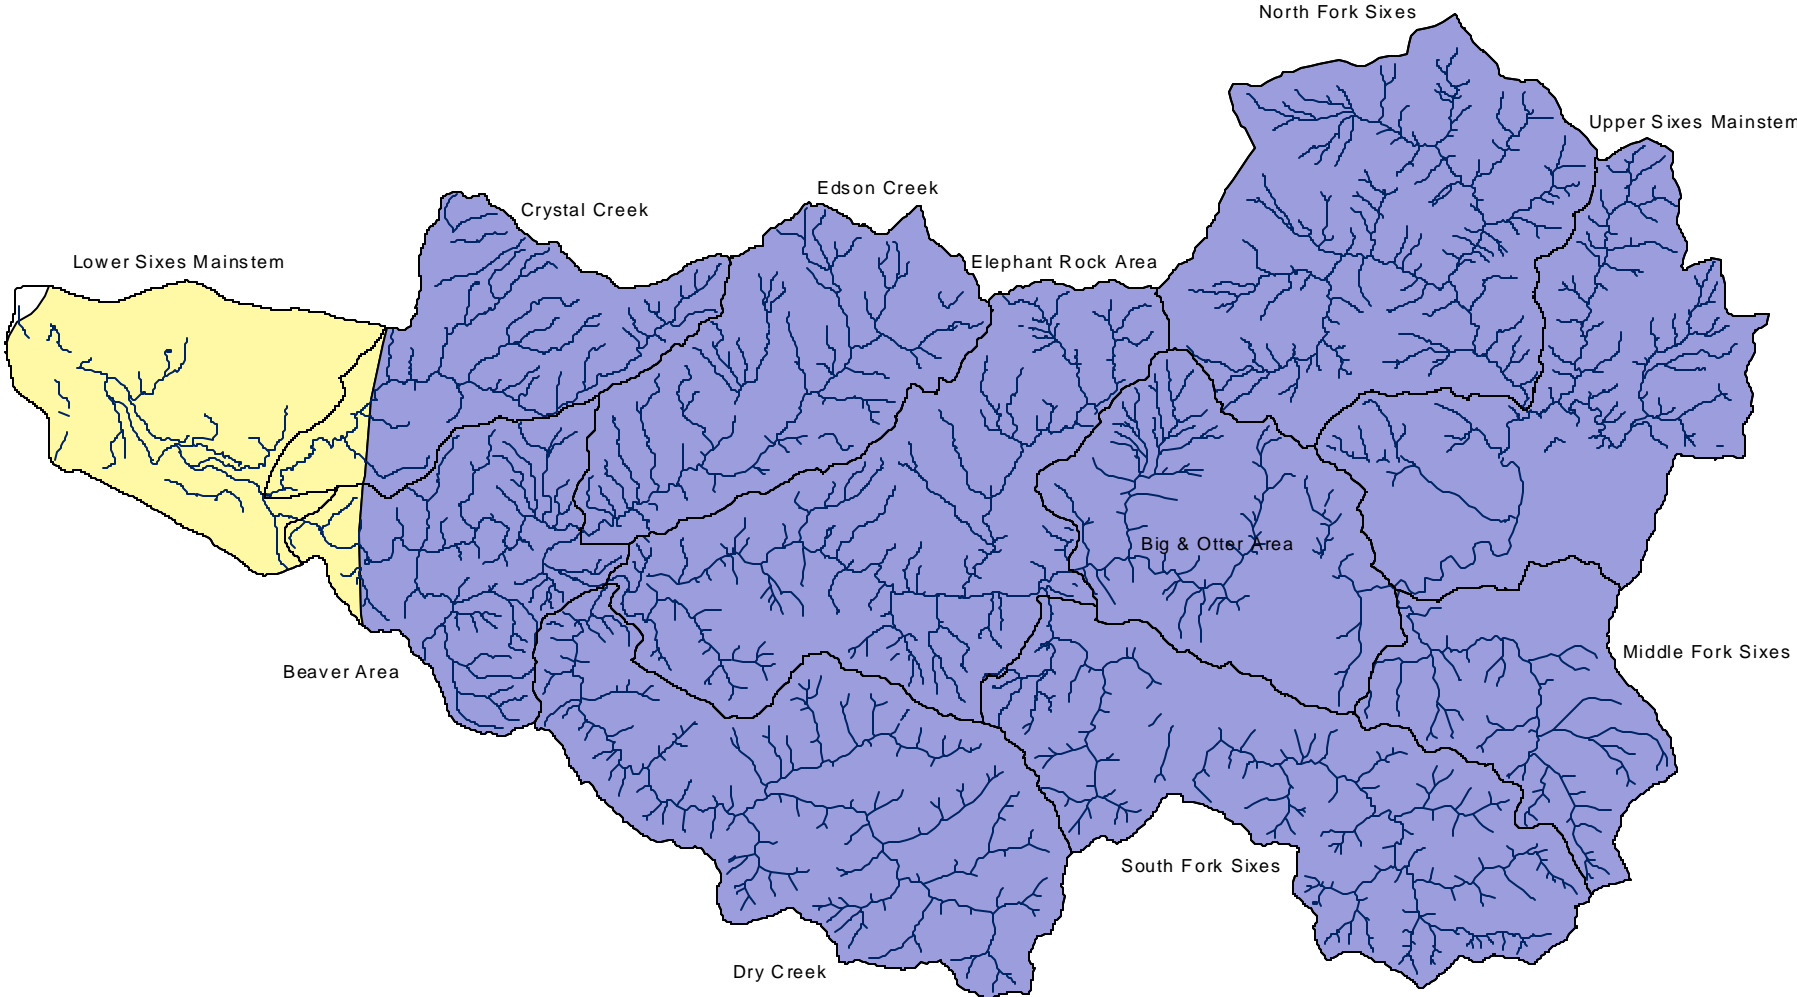

- Sixes Subwatersheds
- ▬ Sixes Streams
- Sixes Ecoregions**
- Southern Oregon Coastal Mountains
- Coastal Lowlands



IV CHANNEL HABITAT TYPES

A BACKGROUND (GWEB 1999)

Stream classification systems can be organized on different scales within a watershed: from as large as the entire channel network down to individual pools or microhabitats within those pools. The Oregon Watershed Assessment Manual (OWAM) provides a classification system centered in the middle of this hierarchy and incorporates landscape features such as valley type and stream reach features such as gradient. The variables selected to describe each channel type remain relatively constant within time scales of concern to land management. The scale of channel features is small enough to predict patterns in physical characteristics, yet large enough to be identified from topographic maps and limited field-work.

The following classification system, titled Channel Habitat Types (CHT), is based on several existing stream classification systems including Rosgen and Montgomery & Buffington (Rosgen 1993; Montgomery and Buffington 1993). The CHTs will enable users to make inferences about how land use impacts can alter physical channel form and process and, therefore, fish habitat.

Bankfull Width, Confinement & Modern Floodplain

Bankfull width is the width of the channel at the point at which over-bank flooding begins (unless the stream is incised), and often occurs as flows reach the 1.5 year recurrence interval level.

Confinement is defined as the ratio of the bankfull width to the width of the modern floodplain.

Modern floodplain is the flood-prone area (Rosgen 1996); it may or may not correspond to the 100-year floodplain.

Confinement Class	Floodplain Width
Unconfined	>4x Bankfull Width
Moderately Confined	>2x Bankfull Width but <4x Bankfull Width
Confined	<2x Bankfull Width

Management Considerations

It is important to remember that CHTs cannot be managed as isolated segments. Stream reaches in one part of a watershed can be affected by activities taking place in a different part of the watershed, either up-stream, down-stream, or on adjacent land areas.

B INTRODUCTION

Sixes River and its tributaries represent a diversity of Channel Habitat Types. Table 6 Channel Habitat Type Attributes provides a comparison of 15 different channel types that potentially occur in a watershed. Each of these stream channels provides unique functions and significant values to both anadromous and resident fish. Fourteen of these CHTs (see list below) were identified throughout approximately 177 miles of streams in the Sixes River basin. A description of each Channel Habitat Type identified in the Sixes River watershed is presented in Section E of this component.

Table 6 Channel Habitat Type Attributes (GWEB 1999)

CHT Code	Type	Gradient	Valley Shape	Channel Pattern	Channel Confinement	OR Stream Size	Position in Drainage
ES	Small Estuarine Channel	0 to 1%	broad	sinuous single or multiple	unconfined	small-med	bottom, mouth of stream
EL	Large Estuarine Channel	0 to 1%	broad	sinuous single or multiple	unconfined	large	bottom, mouth of stream
FP1	Low Gradient Large Floodplain Channel	0 to 1%	broad floodplain	sinuous single or multiple	unconfined	large	bottom, low in drainage
FP2	Low Gradient Floodplain Channel	0 to 2%	broad, flat or gentle landforms	sinuous single or multiple	unconfined	med-large	middle to lower end of drainage
FP3	Low Gradient Small Floodplain Channel	0 to 2%	broad	single or multiple	moderate to unconfined	small-med	variable
AF	Alluvial Fan Channel	1 to 12%	where hillslope opens to broad valley	single or multiple spread like a fan	variable	small-med	lower end of small tributaries
LM	Low Gradient Moderately Confined Channel	0 to 2%	broad, generally much wider than channel	single w/ occasional multiple channels	variable	variable, usually med-large	variable, often mainstem & low end of main trib.
LC	Low Gradient Confined Channel	0 to 2%	low-mod gradient hillslope w/ limited floodplain	single channel, variable sinuosity	conifined by hillslope/terrace	variable, usually med-large	variable, generally mid to lower in large basin
MM	Moderate Gradient Moderately Confined	2 to 4%	narrow valley w/ floodplain or narrow terrace	single, low to moderate sinuosity	variable	variable, usually med-large	middle to lower portion of drainage
MC	Moderate Gradient Confined Channel	2 to 4%	gentle to narrow V-shaped valley, little to no floodplain	single, relatively straight or conforms to hillslope	confined	variable	middle to lower portion of drainage
MH	Moderate Gradient Headwater Channel	1 to 6%	open, gentle V-shaped valley	low sinuosity to straight	confined	small	upper, headwater
MV	Moderately Steep Narrow Valley Channel	4-8%	narrow, V-shaped valley	single channel, relatively straight	confined	small-medium	middle to upper
BC	Bedrock Canyon Channel	>4%	canyons, gorges, very steep side slopes	single channel, straight	tightly confined by bedrock	variable	variable
SV	Steep Narrow Valley Channel	8 to 16%	steep, narrow V-shaped valley	single, straight	tightly confined	small, small to medium	middle upper to upper
VH	Very Steep Headwater	>16%	steep, narrow V-shaped valley	single, straight	tightly confined	small, small to medium	middle upper to upper

Shaded CHT Codes = Found in Sixes River

1. Small Estuarine Channel (ES)
2. Low Gradient Small Floodplain Channel (FP3)
3. Low Gradient Medium Floodplain Channel (FP2)
4. Low Gradient Large Floodplain Channel (FP1)
5. Low Gradient Moderately Confined Channel (LM)
6. Low Gradient Confined Channel (LC)
7. Moderate Gradient Moderately Confined Channel (MM)
8. Moderate Gradient Confined Channel (MC)
9. Moderate Gradient Headwater Channel (MH)
10. Moderately Steep Narrow Valley Channel (MV)
11. Steep Narrow Valley Channel (SV)
12. Very Steep Headwater Channel (VH)
13. Alluvial Fan Channel (AF)
14. Bedrock Canyon Channel (BC)

C METHODOLOGY

1. US Geologic Survey (USGS) maps at the 7.5-minute or 1:24,000 scale were compiled and utilized as base maps for the lower Sixes River watershed. Perennial streams and landscape features such as valley type were analyzed for consideration of stream classification.
2. Stream reaches were delineated on mylar overlays based on channel gradient and channel confinement. Stream reaches were then evaluated based on valley shape, channel pattern, stream size, position in drainage and dominant substrate.
3. Preliminary CHTs were assigned to each reach using a CHT Guide to Identification (Table 6) as well as CHT Descriptions provided in the GWEB Oregon Watershed Assessment Manual.
4. CHT classifications were verified with stream survey data, available in digital format from the Southwest Oregon Province GIS CD Data Set. The name of the shapefile used for this purpose is "Stream Surveys".
5. CHTs were measured on USGS maps using a map wheel.
6. A labeling system was developed for purposes of subwatershed characterization.

D CHANNEL SENSITIVITY / RESPONSIVENESS

In general, responsive portions of the channel network are those that lack the terrain controls which define confined channels. Unconfined or moderately confined channels display visible changes in channel characteristics when flow, sediment supply, or the supply of roughness elements such as large woody debris are altered. These areas are commonly referred to as response reaches, and usually possess an active floodplain. At the other end of the responsive spectrum would be those channels whose characteristics and form are not easily altered, such as Bedrock canyon.


Differences in gradient, confinement, and bed morphology suggest that different channel types are more or less responsive to adjustment in channel pattern, location, width, depth sediment storage, and bed roughness (Montgomery and Buffington 1993). These changes in channel characteristics will in turn trigger alterations of aquatic habitat conditions. The more responsive

or sensitive areas are more likely to exhibit physical changes from land management activities, as well as restoration efforts.

Channel Sensitivity/Response Descriptions

Rating	LWD	Fine Sediment	Coarse Sediment	Peak Flows
High	Critical element in maintenance of channel form, pool formation, gravel trapping/sorting, bank protection	Fines are readily stored with increases in available sediment resulting in widespread pool filling and loss of overall complexity of bed form	Bedload deposition dominant active channel process; general decrease in substrate size, channel widening, conversion to planebed morphology if sediment is added	Nearly all bed material is mobilized; significant widening or deepening of channel
Moderate	One of a number of roughness elements present; contributes to pool formation and gravel sorting	Increases in sediment would result in minor pool filling and bed fining	Slight change in overall morphology; localized widening and shallowing	Detectable changes in channel form; minor widening, scour expected
Low	Not a primary roughness element; often found only along channel margins	Temporary storage only; most is transported through with little impact	Temporary storage only; most is transported through with little impact	Minimal change in physical channel characteristics, some scour and fill

Channel Habitat Type Sensitivity

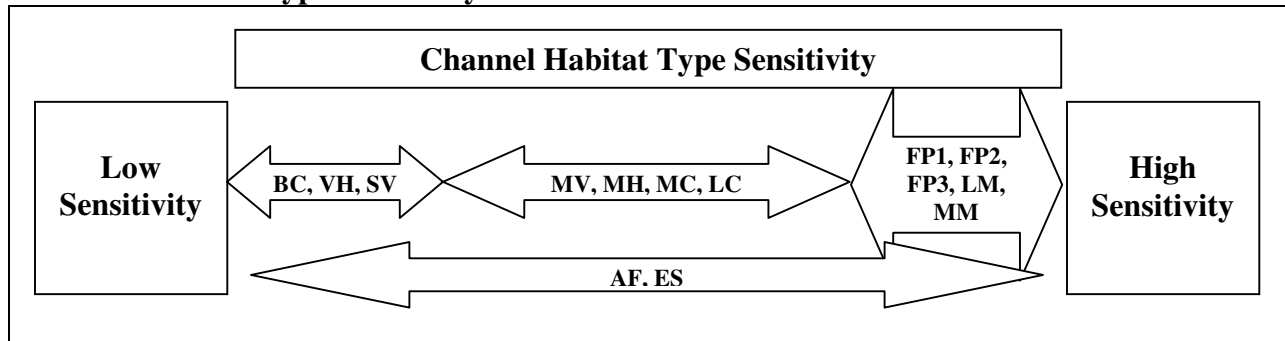

E DESCRIPTION OF CHANNEL HABITAT TYPES (GWEB 1999)

(1) Small Estuarine Channels (ES) (2% of Assessed Channels)

These channels are found at the mouths of drainages along outer coastal beaches or bays. They are intertidal streams that occur exclusively within estuary landforms, usually draining a small, high-relief or moderate-sized watershed. They are associated with saltwater marshes, meadows, mudflats, and deltas.

These streams are predominantly sediment depositional channels associated with low-relief coastal landforms. Stream energy is low due to nearly flat gradients, with substrate material consisting mainly of small gravels, sand, and silt. Channel morphology is strongly influenced by tidal stage. Fine-grained streambanks are highly sensitive to erosion. Beach erosion processes often have a dominant influence on deposition and erosion in the outer coastal estuarine streams.

The original boundary of an estuary may be difficult to determine due to modifications associated with marinas, highways, or reclamation. Many coastal estuaries have been delineated through county, state, or municipal planning processes and may include the predevelopment boundaries.

Channel Sensitivity / Responsiveness

These channels are low-energy areas where sediment deposition is a dominant process. While channel sensitivity in estuaries can vary, the unconfined nature of these areas tends to attenuate changes over space and time. Abandonment and reoccupation of relic channels commonly occurs, but it may be a slow process.

Input Factors	Sensitivity/Responsiveness Rating
Large Woody Debris	Moderate
Fine Sediment	Moderate to High
Coarse Sediment	Low to Moderate
Peak Flows	Low

Fish Use

Anadromous – Important rearing and migration corridor for chinook, coho, steelhead and sea-run cutthroat trout

Resident - Unknown

Riparian Enhancement Opportunities

Many enhancement efforts in estuaries are related to long-term preservation of the area. As these channels harbor unique biological communities, limiting development is a common strategy. Structural enhancement activities often involve dike breaching or removal to reconnect wetlands or sloughs.

(2) Low Gradient Large Floodplain Channel (FP1) (2% of Assessed Channels)

FP1 channels are lowland and valley bottom channels of large watersheds. They may also occupy uplifted estuaries along the coast. Normally, these channels have extensive valley

floodplains and river terraces. Sloughs, oxbows, wetlands, and abandoned channels are common in large river corridors. Smaller tributary streams may flow through channels abandoned by the main river. Numerous overflow side-channels, extensive gravel bars, avulsions, and log jams in forested basins are characteristic. They may be bordered on one bank by steep bluffs, marine terraces, or gentle slopes.

These channels function as sediment deposition systems, with short-term storage of fine sediment. Fines are typically mobilized during most high flow events. Small side-channels dissecting the floodplain are common. In-channel wood accumulations are less stable than in smaller floodplain channels due to higher flood flows and greater channel width. Historically, many of these channels that drained forested areas significantly more wood than observed today.

Channel Sensitivity / Responsiveness

Floodplain channels can be among the most responsive in the basin. The limited influence of confining terrain features and fine substrate allows the stream to move both laterally and vertically. Although often considered low-energy systems, these larger channels can mobilize large amounts of sediment during high flows. This often results in channel migration and new channel formation.

Input Factors	Sensitivity/Responsiveness Rating
Large Woody Debris	Moderate to High
Fine Sediment	Moderate
Coarse Sediment	High
Peak Flows	Low to Moderate

Fish Use

Anadromous – Important spawning, rearing, and migration corridor

Resident – Important spawning, rearing, and overwintering

Riparian Enhancement Opportunities

Due to unstable nature of these channels, the success of many enhancement efforts is questionable. Opportunities for enhancement do occur, however, especially in channels where lateral movement is slow. Lateral channel migration is common, and efforts to restrict this natural pattern will often result in undesirable alteration of channel conditions downstream. Smaller side-channels may be candidates for efforts that improve shade and bank stability, but it is likely that these efforts may be more beneficial and longer-lived elsewhere in the basin.

(3) Low Gradient Medium Floodplain Channel (FP2) (1% of Assessed Channels)

FP2 channels are mainstem streams in broad valley bottoms with well-established floodplains. Alluvial fans, dissected foot slopes, and hill slope and lowland landforms may directly abut FP2 floodplains. These channels are often sinuous, with extensive gravel bars, multiple channels, and terraces. FP2 channels are generally associated with extensive and complex riparian areas that may include such features as sloughs, side-channels, wetlands, beaver pond complexes, and small groundwater-fed tributary channels.

Sediment deposition is prevalent, with fine sediment storage evident in pools and point bars, and on floodplains. Bank erosion and bank-building processes are continuous, resulting in dynamic and diverse channel morphology. Stream banks are composed of fine alluvium and are susceptible to accelerated bank erosion with the removal or disturbance of stream-bank vegetation and root mats. Channel gradient is low, and high stream flows are not commonly contained within the active channel banks, resulting in relatively low stream power.

Channel Sensitivity / Responsiveness

Floodplain channels can be among the most responsive in the basin. The limited influence of confining terrain features and fine substrate allows the stream to move both laterally and vertically. Although often considered low-energy systems, these channels can mobilize large amounts of sediment during high flows. This often results in channel migration and new channel formation.

Input Factors	Sensitivity/Responsiveness Rating
Large Woody Debris	High
Fine Sediment	Moderate
Coarse Sediment	High
Peak Flows	Low to Moderate

Fish Use

Anadromous – Important spawning, rearing, and migration corridor

Resident – Important spawning, rearing, and overwintering

Riparian Enhancement Opportunities

Due to the unstable nature of these channels, the success of many enhancement efforts is questionable. Opportunities for enhancement do occur, however, especially in channels where lateral movement is slow. Lateral channel migration is common, and efforts to restrict this natural pattern will often result in undesirable alteration of channel conditions downstream. Side channels may be candidates for efforts that improve shade and bank stability.

(4) Low Gradient Small Floodplain Channel (FP3) (4% of Assessed Channels)

FP3 streams are located in valley bottoms and flat lowlands. They frequently lie adjacent to the toe of foot slopes or hill slopes within the valley bottom of larger channels, where they are typically fed by high-gradient streams. They may be directly downstream of small alluvial fan and contain wetlands. FP3 channels may dissect the larger floodplain. These channels are often the most likely CHT to support beavers, if they are in the basin. Beavers can dramatically alter channel characteristics such as width, depth, form, and most aquatic habitat features.

These channels can be associated with a large floodplain complex and may be influenced by flooding of adjacent mainstem streams. Sediment routed from upstream high-and-moderate gradient channels is temporarily stored in these channels and on the adjacent floodplain.

Channel Sensitivity / Responsiveness

Floodplain channels can be among the most responsive in the basin. The limited influence of confining terrain features and fine substrate allows the stream to move both laterally and vertically. Although often considered low-energy systems, these channels can mobilize large amounts of sediment during high flows. This often results in channel migration and new channel formation.

Input Factors	Sensitivity/Responsiveness Rating
Large Woody Debris	High
Fine Sediment	Moderate to High
Coarse Sediment	High
Peak Flows	Low

Fish Use

Anadromous – Important spawning, rearing, and migration corridor

Resident – Important spawning, rearing, and overwintering

Riparian Enhancement Opportunities

Floodplain channels are, by their nature, prone to lateral migration, channel shifting, and braiding. While they are often the site of projects aimed at channel containment (diking, filling, etc.), it should be remembered that the floodplain channels can exist in a dynamic equilibrium between stream energy and sediment supply. As such, the active nature of the channel should be respected, with restoration efforts carefully planned. The limited power of these streams offers a better chance for success of channel enhancement activities than the larger floodplain channels. While the lateral movement of the channel will limit the success of many efforts, localized activities to provide bank stability or habitat development can be successful.

(5) Low Gradient Confined Channels (LC) (17% of Assessed Channels)

LC channels are incised or contained within adjacent, gentle landforms or incised in uplifted coastal landforms. Lateral channel migration is controlled by frequent high terraces or hill slopes along stream banks. They may be bound on one bank by hill slopes and lowlands on the other. They may also have a narrow floodplain in places, particularly on the inside of meander bends. Streambank terraces are often present, but they are generally above the current floodplain. Channels confined by hill slope or bedrock are often stable and display less bank erosion and scour compared to incised channels that are often unstable and confined by alluvial terraces.

High flow events are well-contained by the upper banks. High flows in these well-contained channels tend to move all but the most stable wood accumulations downstream or push debris to the channel margins. Stream banks can be susceptible to landslides in areas where steep hill slopes of weathered bedrock parent materials meet the channel.

Caution: Caution should be used in interpreting channels that have downcut into alluvial material set in a wide flat valley. If streambanks are high enough to allow a floodplain width less than two times the bankfull width, then the stream meets the definition of confined.

However, some streams meeting this definition may have recently down-cut, effectively reducing floodplain width as the channel deepens. It is beyond the scope of this assessment to address technical issues such as the rate of channel incision. However, for the purpose of interpreting Channel Sensitivity / Responsiveness, it should be noted that these channels may have transitioned from LM to LC channels.

Channel Sensitivity / Responsiveness

The presence of confining terraces or hill slopes and control elements such as bedrock limit the type and magnitude of channel response to changes in input factors. Adjustment of channel features is usually localized and of a modest magnitude.

Input Factors	Sensitivity/Responsiveness Rating
Large Woody Debris	Low to Moderate
Fine Sediment	Low
Coarse Sediment	Moderate
Peak Flows	Low to Moderate

Fish Use

Anadromous - Important spawning, rearing and migration corridor for chinook, coho, steelhead and sea-run cutthroat trout

Resident - Important spawning, rearing and overwintering for cutthroat trout

Riparian Enhancement Opportunities

These channels are not highly responsive, and in channel enhancements may not yield intended results. In basins where water-temperature problems exist, the confined nature of these channels lends itself to establishment of riparian vegetation. In nonforested land, these channels may be deeply incised and prone to bank erosion from livestock. As such, these channels may benefit from livestock access control measures.

(6) Low Gradient Moderately Confined Channel (LM) (7% of Assessed Channels)

These channels consist of low-gradient reaches that display variable confinement by low terraces or hill slopes. A narrow floodplain approximately two to four times the width of the active channel is common, although it may not run continuously along the channel. Often low terraces accessible by flood flows occupy one or both sides of the channel. The channels tend to be of medium to large size, with substrate varying from bedrock to gravel and sand. They tend to be slightly to moderately sinuous, and will occasionally possess islands and side channels.

Channel Sensitivity / Responsiveness

The unique combination of an active floodplain and hill slope or terrace controls acts to produce channels that can be among the most responsive in the basin. Multiple roughness elements are common, with bedrock, large boulders, or wood generating a variety of aquatic habitat within the stream network.

Input Factors	Sensitivity / Responsiveness Rating
Large Woody Debris	Moderate to High
Fine Sediment	Moderate to High
Coarse Sediment	Moderate to High
Peak Flows	Moderate

Fish Use

Anadromous - Potential spawning and rearing for chinook, coho, steelhead and sea-run cutthroat trout

Resident - Potential spawning, rearing and overwintering for cutthroat trout

Riparian Enhancement Opportunities

Like intact floodplain channels, these channels can be among the most responsive of channel types. Unlike floodplain channels, however, the presence of confining landform features often improves the accuracy of predicting channel response to activities that may affect channel form. Additionally, these controls help limit the destruction of enhancement efforts common to floodplain channels. Because of this, LM channels are often good candidates for enhancement efforts.

In forested basins, habitat diversity can often be enhanced by the addition of wood or boulders. Pool frequency and depth may increase, and side-channel development may result from these efforts. Channels of this type in non forested basins are often responsive to bank stabilization efforts such as riparian planting and fencing. Beavers are often present in the smaller streams of this channel type. Fish habitat in some channels may benefit from beaver introduction through side-channel and scour pool development. Introduction of beavers, however, may have significant implications for overall channel form and function, and should be thoroughly evaluated by land managers, as well as biologists, as a possible enhancement activity.

(7) Moderate Gradient Confined Channel (MC) (9% of Assessed Channels)

MC streams flow through narrow valleys with little river terrace development, or are deeply incised into valley floors. Hill slopes and mountain slopes composing the valley walls may lie directly adjacent to the channel. Bedrock steps, short falls, cascades, and boulder runs may be present; these are usually sediment transport systems. Moderate gradients, well contained flows, and large-particle substrate indicate high stream energy. Landslides along channel side slopes may be a major sediment contributor in unstable basins.

Channel Sensitivity / Responsiveness

The presence of confining terraces or hill slopes and control elements such as bedrock substrates limits the type and magnitude of channel response to changes management. Adjustment of channel features is usually localized and of a modest magnitude.

Input Factors	Sensitivity / Responsiveness Rating
Large Woody Debris	Low
Fine Sediment	Low
Coarse Sediment	Moderate
Peak Flows	Moderate

Fish Use

Anadromous - Potential steelhead and coho spawning and rearing; may have pockets of suitable chinook habitat depending on site-specific factors

Resident - Potential spawning, rearing and overwintering for cutthroat trout

Riparian Enhancement Opportunities

These channels are not highly responsive, and in-channel enhancements may not yield intended results. Although channels are subject to relatively high energy, they are often stable. In basins where water-temperature problems exist, the stable banks generally found in these channels lend themselves to establishment of riparian vegetation. In nonforested land, these channels may be deeply incised and prone to bank erosion from livestock. As such, these channels may benefit from livestock access control measures.

(8) Moderate Gradient Moderate Confined Channel (MM) (2% of Assessed Channels)

This group includes channels with variable controls on channel confinement. Altering valley terraces and/or adjacent mountain-slope, foot-slope, and hill-slope landforms limit channel migration and floodplain development. Similar to the LM channels, a narrow floodplain is usually present, and may alternate from bank to bank. Bedrock steps with cascades may be present.

Channel Sensitivity / Responsiveness

The unique combination of a narrow floodplain and hill-slope or terrace controls acts to produce channels that are often the most responsive in the basin. The combination of higher gradients and the presence of a floodplain set the stage for a dynamic channel system. Multiple roughness elements such as bedrock, large boulders, or wood may be common, resulting in a variety of aquatic habitats within the stream network.

Input Factors	Sensitivity / Responsiveness Rating
Large Woody Debris	High
Fine Sediment	Moderate
Coarse Sediment	Moderate to High
Peak Flows	Moderate

Fish Use

Anadromous - Potential steelhead and coho spawning and rearing; may have pockets of suitable chinook habitat depending on site-specific factors

Resident - Potential spawning, rearing and overwintering for cutthroat trout

Riparian Enhancement Opportunities

Like floodplain channels, these channels are among the most responsive of channel types. Unlike floodplain channels, however, the presence of confining landform features improves the accuracy of predicting channel response to activities that may affect channel form. Additionally, these controls help limit the destruction of enhancement efforts, a common problem in floodplain channels. Outcome of enhancement efforts are a bit more uncertain than in LM channels. MM channels, however, are often good candidates for enhancement efforts.

In forested basins, habitat diversity can often be enhanced by the addition of roughness elements such as wood or boulders. Pool frequency and depth may increase as well as side-channel development as the result of these efforts. Channels of this type in nonforested basins are often responsive to bank stabilization efforts such as riparian planting and fencing.

Beavers are often present in the smaller streams of this channel type, and fish habitat in some channels may benefit from beaver introduction through side-channel and scour pool development. Introduction of beavers, however, may have significant implications for overall channel form and function, and should be thoroughly evaluated by land managers as well as biologists as a possible enhancement activity.

(9) Moderate Gradient Headwater Channel (MH) (2% of Assessed Channels)

These channels are similar to LC channels, but occur exclusively in headwater regions. They may be sites of headwater beaver ponds. They are potentially above the anadromous fish zone. These gentle to moderate headwater streams generally have low streamflow volumes and, therefore, low stream power. The confined channels provide limited sediment storage in low-gradient reaches. Channels have a small upslope drainage area with sediment sources limited to upland surface erosion.

Channel Sensitivity / Responsiveness

The low stream power and presence of confining terraces or hill slopes and control elements such as bedrock substrates limit the type and magnitude of channel response to changes in input factors. Adjustment of channel features is usually localized and of a moderate magnitude.

Input Factors	Sensitivity / Responsiveness Rating
Large Woody Debris	Moderate
Fine Sediment	Moderate
Coarse Sediment	Moderate to High
Peak Flows	Moderate

Fish Use

Anadromous - Potential steelhead and coho spawning and rearing; limited chinook

Resident - Potential spawning, rearing and overwintering for cutthroat trout

Riparian Enhancement Opportunities

These channels are moderately responsive. In basins where water-temperature problems exist, the stable banks generally found in these channels lend themselves to establishment of riparian

vegetation. In nonforested land, these channels may be deeply incised and prone to bank erosion from livestock. As such, these channels may benefit from livestock access control measures.

(10) Moderately Steep Narrow Valley Channel (MV) (13% of Assessed Channels)

MV channels are moderately steep and confined by adjacent moderate to steep hill slopes. High flows are generally contained within the channel banks. A narrow floodplain, one channel width or narrower, may develop locally.

MV channels efficiently transport both coarse bedload and fine sediment. Bedrock steps, boulder cascades and chutes are common features. The large amount of bedrock and boulders create stable streambanks; however, steep side slopes may be unstable. Large woody debris is commonly found in jams that trap sediment in locally low-gradient steps.

Channel Sensitivity / Responsiveness

The gradient and presence of confining terraces or hill slopes and control elements such as bedrock substrates limit the type and magnitude of channel response to changes in input factors. Adjustment of channel features is localized and of a minor magnitude.

Input Factors	Sensitivity / Responsiveness Rating
Large Woody Debris	Moderate
Fine Sediment	Low
Coarse Sediment	Moderate
Peak Flows	Moderate

Fish Use

Anadromous - Potential steelhead, coho and sea-run cutthroat spawning and rearing

Resident - Potential spawning, rearing and overwintering for cutthroat trout

Riparian Enhancement Opportunities

These channels are not highly responsive, and in channel enhancements may not yield intended results. Although channels are subject to relatively high energy, they are often stable. In basins where water-temperature problems exist, the stable banks generally found in these channels lend themselves to establishment of riparian vegetation. In nonforested land, these channels may be deeply incised and prone to bank erosion from livestock. As such, these channels may benefit from livestock access control measures.

(11 & 12) Steep Narrow Valley Channel (SV) & Very Steep Headwater (VH)

(SV = 32% & VH = 9% of Assessed Channels)

These two channel types are very similar and are thus presented together. However VH channels are steeper. SV channels are situated in a constricted valley bottom bounded by steep mountain or hill slopes. Vertical steps of boulder and wood with scour pools, cascades, and falls are common. VH channels are found in the headwaters of most drainages or side slopes to larger streams, and commonly extend to ridge-tops and summits. These steep channels may be

shallowly or deeply incised into the steep mountain or hill slope. Channel gradient may be variable due to falls and cascades.

Channel Responsiveness

The gradient and presence of confining terraces or hill slopes and control elements such as bedrock substrates limit the type and magnitude of channel response to changes in input factors. Adjustment of channel features is localized and of a minor magnitude. These channels are also considered source channels supplying sediment and wood to downstream reaches, sometimes via landslides.

Input Factors	Sensitivity / Responsiveness Rating
Large Woody Debris	Moderate
Fine Sediment	Low
Coarse Sediment	Low to Moderate
Peak Flows	Low

Fish Use

Anadromous (SV) - Lower gradient areas provide limited rearing (if accessible)

Resident (SV) - Limited resident spawning and rearing / **Resident** (VH) - Very limited rearing

Riparian Enhancement Opportunities

These channels are not highly responsive, and in-channel enhancements may not yield intended results. Although channels are subject to relatively high energy, they are often stable. In basins where water temperature problems exist, the stable banks generally found in these channels lend themselves to establishment of riparian vegetation. This may also serve as a recruitment effort for large woody debris in the basin.

(13) Alluvial Fan Channels (AF)

(9% of Assessed Channels)

Alluvial fans are generally tributary streams that are located on foot-slope landforms in a transitional area between valley floodplains and steep mountain slopes. Alluvial fan deposits are formed by the rapid change in transport capacity as the high-energy mountain-slope stream segments spill onto the valley bottom. Channel pattern is highly variable, often dependent on substrate size and age of the landform. Channels may change course frequently, resulting in a multibranched stream network. Channels can also be deeply incised within highly erodible alluvial material. Smaller alluvial fan features may be difficult to distinguish from FP3 channels.

Channel Sensitivity / Responsiveness

The response of alluvial fans to changes in input factors is highly variable. Response is dependent on gradient, substrate size and channel form. Single-threaded channels confined by high banks are likely to be less responsive than an actively migrating multiple-channel fan. The moderate gradient and alluvial substrate of many fans results in channels with a moderate to high overall sensitivity.

Input Factors	Sensitivity/Responsiveness Rating
Large Woody Debris	Variable
Fine Sediment	Moderate to High
Coarse Sediment	High
Peak Flows	Moderate to High

Fish Use

Anadromous - Important rearing and migration corridor; potential spawning in lower gradients

Resident - Important spawning and rearing

Riparian Enhancement Opportunities

As many alluvial fans are actively moving at a rate greater than most channels, they are generally not well-suited to successful enhancement activities. Although they are considered responsive channels, long-term success of enhancement activities is questionable. High sediment loads often limit the success of efforts to improve habitat complexity such as wood placement for pool development.

(14) Bedrock Canyon Channel (BC)

(<1% of Assessed Channels)

BC channels are associated with valley bottom gorge landforms typically cut through bedrock with long, steep, side-slope walls. Channel features include cascades, rapids, and major falls, although long pools may exist.

Channel Sensitivity / Responsiveness

The bedrock side slopes and channel bed severely limit the sensitivity of these channels to change. They are the least responsive of the identified channel types.

Input Factors	Sensitivity/Responsiveness Rating
Large Woody Debris	Low
Fine Sediment	Low
Coarse Sediment	Low
Peak Flows	Low

Riparian Enhancement Opportunities

These channels are not responsive, and are generally a poor site for enhancement efforts.

F RESULTS


Table 7 Channel Habitat Types by Subwatershed (miles)

Subwatershed	Channel Habitat Types														Totals
	AF	BC	ES	FP1	FP2	FP3	LC	LM	MC	MH	MM	MV	SV	VH	
Beaver Area	0.1	0.0	0.0	1.1	0.0	0.6	1.1	4.9	0.9	0.0	0.0	1.9	4.0	0.4	15.0
Big & Otter Area	0.0	0.0	0.0	0.0	0.0	0.0	4.5	0.0	0.2	0.0	0.4	1.3	0.9	1.4	8.8
Crystal Creek	0.0	0.0	0.0	0.0	1.7	0.5	0.7	0.0	1.7	0.0	0.0	4.4	8.0	0.9	17.8
Dry Creek	0.0	0.0	0.0	0.0	0.0	0.1	2.8	1.5	0.0	0.0	0.0	1.2	0.3	0.3	6.3
Edson Creek	0.0	0.0	0.0	0.0	0.0	0.0	0.9	0.8	2.8	0.0	0.0	1.0	9.8	3.2	18.6
Elephant Rock Area	0.0	0.5	0.0	0.0	0.0	0.2	6.3	1.4	2.2	0.3	0.8	2.7	10.4	3.1	27.9
Lower Sixes Mainstem	0.0	0.0	3.2	3.4	0.0	6.0	0.2	0.9	0.3	2.7	0.0	0.4	0.7	0.0	17.8
Middle Fork Sixes	0.0	0.0	0.0	0.0	0.0	0.0	0.6	0.0	2.8	0.2	0.0	2.9	5.0	2.5	14.0
North Fork Sixes	0.0	0.0	0.0	0.0	0.0	0.0	5.7	1.4	1.7	0.0	0.0	3.9	9.4	1.8	23.9
South Fork Sixes	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.0	0.2	0.0	1.5	0.4	2.4
Upper Sixes Mainstem	0.0	0.0	0.0	0.0	0.0	0.0	7.7	0.8	2.3	0.0	1.5	3.1	7.4	2.2	24.9
Totals	0.1	0.5	3.2	4.5	1.7	7.3	30.6	11.7	15.2	3.2	2.8	22.9	57.3	16.2	177.3

Table 8 Sixes River Channel Habitat Type Summary

CHT	Channel Description	Percent of Miles	Response to Disturbance	Riparian Treatment Opportunities
ES	Small estuarine	2	Moderate	Limit human structures
FP1	Low gradient large floodplain	2	Moderate	Few opportunities
FP2	Low gradient medium floodplain	1	High	Respect lateral movement
FP3	Low gradient small floodplain	4	High	Respect lateral movement
AF	Alluvial fan	9	Variable	Few opportunities
LM	Low gradient moderately confined	7	High	Good candidates
LC	Low gradient confined	17	Low Mod	Manage livestock access
MM	Moderate gradient moderately confined	2	High	Good candidates
MC	Moderate gradient confined	9	Mod	Manage livestock access
MH	Moderate gradient headwater	2	Mod	Manage livestock access
MV	Moderately steep narrow valley	13	Mod	Manage livestock access
BC	Bedrock canyon	<1	Low	Few opportunities
SV	Steep narrow valley	32	Low	Few opportunities
VH	Very steep headwater	9	Low	Few opportunities

Figure 2 Miles of Channel Habitat Types

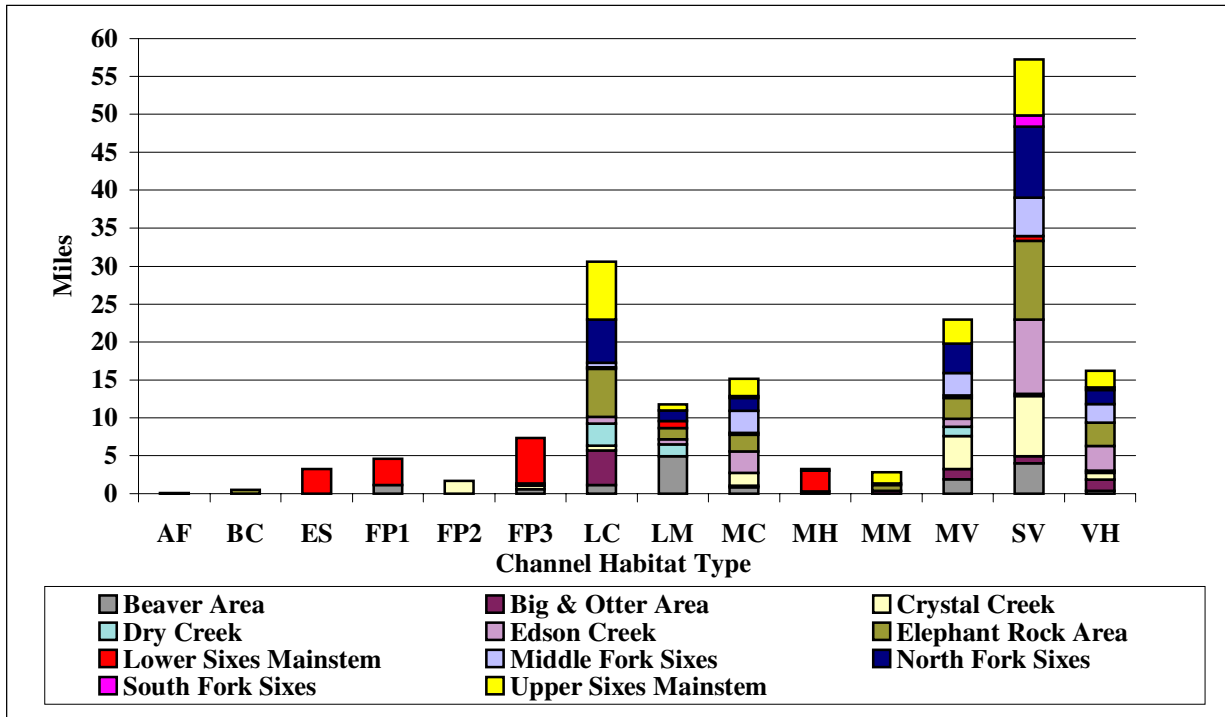

G KEY FINDINGS

- Of the 177 stream miles evaluated in this assessment, 41 percent are classified as steep (SV) to very steep (VH) narrow valleys. These are typically the small headwater streams in all of the Sixes River subwatersheds. The channels are stable, not highly responsive to either disturbance or restoration, but their stable banks support riparian vegetation, making them good candidates for riparian planting or thinning.
- The half mile of bedrock canyon (BC) in the Elephant Rock area is least responsive to disturbance, and a poor candidate for restoration activities.
- Moderate gradient confined and headwater streams (MC, MH, and MV) comprise 24 percent of the channels, and low gradient confined channels (LC) are 17 percent, for a total of 41 percent. These are typically located in small to medium size streams. MC and MV channels are found throughout the subwatersheds and the small amount of MH is in Elephant Rock, Lower Sixes, and Middle Fork Sixes. The largest amounts of LC are in the Big and Otter area, Elephant Rock, North Fork, and Upper Sixes Mainstem. Channels are fairly stable, moderately responsive to disturbance, and not highly responsive to restoration activities except for riparian planting or thinning. In nonforested areas, channels may be deeply incised and prone to erosion by livestock, so they may benefit from livestock access control measures.
- Moderate gradient, moderately confined channels (MM) characterize 2 percent and low gradient streams that are moderately confined (LM) characterize 7 percent of the channels.

The largest amount of LM channels is in the Beaver area; small amounts of LM and MM are scattered through most subwatersheds but not Crystal Creek or Middle Fork Sixes. These 9 percent of the channel miles are among the most responsive to both disturbance and restoration activities. Habitat diversity can be enhanced by adding structure such as boulders and large wood; banks can be stabilized by planting and fencing.

- Less than one percent of channel was classified as alluvial fan (AF), in the Beaver area. These channels tend to be very responsive to disturbance, but single thread channels with high banks are less responsive. Movement in the alluvial fan itself usually makes channel restoration efforts unsuccessful.
- Low gradient streams with large (FP1), medium (FP2), or small (FP3) flood plain channels comprise 7 percent of the stream network, located on the valley floor, primarily in the Lower Sixes mainstem. They are among the most responsive to disturbance, and channels often migrate. Attempts to control channel migration may not be effective and may cause problems elsewhere. In localized areas where lateral movement is slow, particularly in channels with small floodplains (FP3), restoration or enhancement activities may be successful.
- Two percent of the channel length inventoried was classified as small estuarine channel (ES), the 3.2 miles of the Sixes River mainstem. This channel type is unconfined and responds to variations in sediment and weather patterns from both upstream and ocean. Restoration and enhancement activities often focus on long-term preservation of habitat for unique biological communities through techniques such as limiting future development and reconnecting wetlands isolated by manmade dikes.
- Sixes River has the greatest diversity of CHTs and the most miles of LM and MM channels among those assessed in Curry County. LM and MM channels are scattered throughout the watershed with significant opportunities to protect and restore adjacent riparian areas.

REFERENCES

GWEB 1999. Oregon Watershed Assessment Manual. Governor's Watershed Enhancement Board, July 1999

Montgomery, D.R., and J.M. Buffington. 1993. Channel Classification, Prediction of Channel Response, and Assessment of Channel Condition. Washington State Timber/Fish/Wildlife Report TFW-SH10-93-002, Olympia.

Rosgen, D.L. 1996. Applied River Morphology. Wildland Hydrology, Pagosa Springs, CO.

V FISH & FISH HABITAT

A BACKGROUND

Salmonid Life Cycles (OSU 1998)

Salmonid is the group name for salmon, trout, and char. These fish share a common life history pattern. Many are anadromous, i.e., they spawn in fresh water, migrate to sea as juveniles, grow to maturity, and return to their freshwater stream to reproduce.

Adult salmonids spawn by burying their eggs in nests called redds. Spawning site selection depends on the species, gravel size, and flow pattern of the stream. A common spawning location is the “tail-out” of a pool – the area where a pool becomes shallow before entering a downstream riffle. The eggs remain in the gravel for 45 – 70 days depending on water temperatures. Hatching alevins (fry with yolk sacs for nutrients) remain in the gravel until the yolk sac is absorbed. They then work their way through the gravel and emerge into the stream channel as feeding fry. This is a critical stage for all salmonid species. During this part of their life, fry need adequate food and sediment-free water that contains a lot of oxygen.

Natural mortality of juveniles is high during the first month. Many fry are eaten by birds, amphibians, reptiles, and other fish. Depending on the species, juvenile anadromous salmonids grow 1-3 years before migrating to sea as smolts. Smolts need to adapt from freshwater to saltwater by spending transition time in the estuary. After maturing in the ocean, they return to the stream to spawn.

Life cycles vary greatly from river to river and among species (e.g., winter vs. summer steelhead, spring vs. fall chinook, sea run vs. resident cutthroat trout). Where several salmonid species coexist in a river system, each species has its own schedule for rearing, spawning, and migration, although it is not uncommon for juveniles and adults to occupy the same stream areas throughout the year. Adult anadromous salmonids find their way back from the ocean to the streams where they were born. This life cycle feature is called homing and is one of the least understood yet most wonderful aspects of salmon ecology.

Chinook salmon

Chinook (king) salmon are the largest and longest lived of the Pacific salmon. They average 20-25 pounds as adults, although individuals as large as 100 pounds have been reported. There are two basic life-history patterns of chinook in Oregon – fall and spring. Fall chinook return from the ocean in late-August through December. They spawn in main river channels and low-gradient tributaries. Since chinook are large, they can dig redds deep in the gravel, thus protecting the eggs from channel scouring during winter storms. If an unusually heavy storm does scour the eggs and a year is lost, successive generations can replace the stock because adult chinook spawn from 3-6 years of age. All chinook can spawn once but they then die.

Juvenile fall chinook emerge from the gravel in February or March. They stay in the stream only about 90 days. Peak downstream migration in south coast streams

(excluding the Rogue River) is typically early to mid July. They generally spend the next 3-4 months in the estuary and then migrate to the ocean with fall rains. Spring chinook adults return to rivers in the spring and spend the summer in deep pools. They spawn in early fall. The life histories of these juveniles are more variable than those of all chinook.

Coho salmon

Coho (silver) salmon historically were the most abundant salmon on the Oregon Coast. Adults average 6-12 pounds and have a strict 3-year life cycle. Because coho spawn mostly at age 3 with no year class overlap, their survival is susceptible to catastrophic events. If a year is lost, a population is likely to remain depressed for a long time. Coho can recolonize tributaries from highly populated source areas. However, this species can be eliminated from a basin quickly if these source areas deteriorate.

Coho spawn from November to March with two dominant life-history patterns. “Early” coho enter streams on the first major storm of the year, usually in mid-November. If they are successful at spawning, their fry have the advantage of getting the first shot at the food resources. These fry also become the largest individuals, providing additional survival advantage.

Coho are not as large as chinook, they spawn in smaller gravel, and their redds are not as deep as those of chinook. Thus, their redds are likely to be scoured out during winter storms. Therefore, a second stock of “late” coho has evolved to delay spawning until most major winter storms have passed, often as late as March or April. These two groups provide important genetic variation to the species and help coho withstand natural climate variations.

Coho juveniles generally emerge from the gravel from February through April. They prefer to live in pools with slow flow or in beaver ponds. Juveniles remain in the stream for a full year and then migrate to the ocean in April or May. Some coho return as 2-year-old jacks (males), but most return as 3-year-old adults.

Steelhead

Steelhead are seagoing rainbow trout. Adults average 8-12 pounds, and some adults live as long as 7 years. Winter steelhead return from the ocean from November through April, allowing them to move into headwaters of stream during winter flows. Some spawning occurs in May. Like salmon, they deposit their eggs in gravel. However, not all steelhead die after spawning. About 30 percent survive to spawn again in the stream of their birth.

Juveniles emerge as late as early July. During the first year they live in riffles and along the edges of stream channels. Therefore, low water conditions can severely affect steelhead. They spend 1-3 years in a stream before migrating to the ocean. This long freshwater residence time also makes them more vulnerable to habitat degradation.

Summer steelhead adults enter river systems from April through August. Unlike winter fish, but like spring chinook, these steelhead need deep, cool pools to reside in until

spawning in January or February. The juvenile life history of summer steelhead is similar to that of winter steelhead.

Cutthroat trout

Cutthroat trout have variable life history patterns. Some migrate to the ocean while others remain in the same area of a stream all of their lives. Anadromous and fluvial forms use estuarine, mainstem, and lower portions of the system for adult holding and juvenile rearing, and use small headwater streams for spawning. The resident form of cutthroat are also typically found in headwater areas, but can be found in low gradient backwater areas lower in the system. Cutthroat spawn in the spring or fall, usually in very small tributaries, and the juveniles emerge by June or July. Sea-run cutthroat rarely exceed a length of 20 inches or a weight of 4 pounds. (ODFW, 1995)

Salmonid Spawning Habitat

Successful spawning and development from eggs to fry stages require the following:

- No barriers to upstream migration for adults
- Spawning areas (usually in a riffle or at the tail-out of a pool) with stable gravel, free of fine sediment
- A combination of pools and riffles that provides both spawning areas and places to hide nearby
- A constant flow of clean, well oxygenated water through the spawning gravel

Salmonid Rearing Habitat

Fry are vulnerable to predators and must endure high stream flows and food shortages. They need pools for rearing, temperature regulation, and cover. Good juvenile-rearing habitat exhibits the following characteristics:

- Low to moderate stream gradient (slope) and velocity
- A good mix of pool and riffle habitats
- Clean, oxygenated water and cool stream temperatures
- A variety of bottom types to provide habitat for juvenile fish and food organisms
- Overhanging vegetation, large woody material, and stream cutbanks, which provide protection for juvenile fish and leaf litter for aquatic insect food
- Sufficient nutrients to promote algal growth and decomposition of organic material

As young fish grow, they seek increased summer flow, moving from the edge of a stream to midstream to take advantage of insect drift. In winter, all species seek areas of lower water velocity where they can conserve energy while food and growing conditions are limited.

Salmonid Habitat Use

Although their basic requirements are the same, salmonid species differ in the types of habitat they use. For example, juvenile coho prefer pool areas of moderate velocity in the summer, especially those with slack water current near undercut stream banks, root wads, or logs. In winter, they seek slow, deep pools or side channels, utilizing cover under rocks, logs and debris.

Conversely, juvenile steelhead spend their first summer in relatively shallow, cobble-bottomed areas at the tail-out of a pool or shallow riffle. During winter, they hide under large boulders in riffle areas.

In summer, older steelhead juveniles prefer the lead water of pools and riffles where there are large boulders and woody cover. The turbulence created by boulders also serves as cover. During winter, these steelhead juveniles are found in pools, near streamside cover, and under debris, logs or boulders.

Cutthroat trout habitat requirements are similar to those of steelhead with the exception that they spend the summer in pools. Chinook juveniles tend to rear in large tributaries, and their habitat requirements are different than those of coho. For example, estuarine residence and growth are key elements in a chinook life-history pattern. Coho salmon require backwaters, beaver ponds, or side-channel rearing habitats to survive high winter flows and low summer flows.

Salmonid Limiting Factors

The quantity and quality of spawning and rearing habitat limit the success of spawning and production of smolts. These limiting factors establish the carrying capacity of a stream. Carrying capacity is the number of animals a habitat can support throughout the year without harm to either the organisms or the habitat. Depending upon the limits of available habitat, ocean factors, escapement, etc., salmonid populations fluctuate annually as a result of varying environmental factors (e.g. extreme high and low stream flows, high stream temperatures in the summer, or ice). A stream does not necessarily reach its carrying capacity each year because of these factors.

Salmonid Fish Passage

Stream channel crossings by roads have been the cause of serious losses of fish habitat due to improperly designed culverts. Assessment of migration barriers is important, because anadromous salmonids migrate upstream and downstream during their lifecycles. In addition, many resident salmonids and other fish move extensively upstream and downstream to seek food, shelter, better water quality, and spawning areas. Where these barriers occur, fish can no longer reach suitable habitats. Because of reduced accessible habitat, fish populations may be limited.

Culvert road crossings can create barriers to fish migration in the following ways:

- The culvert is too high for the fish to jump into.
- The water velocity in the culvert is too fast for the fish to swim against.
- The water in the culvert is not deep enough for the fish to swim, or has a disorienting turbulent flow pattern, making it difficult for fish to find their way through.
- There is no pool below the culvert for the fish to use for jumping and resting, so they cannot access the culvert, or there are no resting pools above the culvert, so the fish are washed back downstream.

A combination of these conditions may also impede fish passage. It is not always clear when a culvert blocks fish passage. Some culverts may be velocity barriers during high flows but pass fish successfully during low flows. Other culverts may not be deep enough during summer low flows to pass fish, but fish can pass successfully during higher flows. Large, adult anadromous fish may be able to pass through culverts that are total barriers to smaller juvenile or resident fish. For these reasons it is important to understand what fish species occur in the watershed and when they will be migrating.

Culverts can be round, square, elliptical, or other shapes. Culverts can be made of various materials, including concrete, but metal pipe is the most common material. Because of the variability in culvert type and design, it is often difficult to definitively determine if a culvert blocks fish passage.

Other fish passage concerns can include impoundments, dams, unscreened and screened irrigation pipes and water withdrawals that result in dewatered reaches and/or low flows that restrict migration. Natural barriers, in contrast, are characteristic of a stream's channel morphology and where present, play a vital role in the co evolution of various fish species.

B INTRODUCTION

Chinook, coho, steelhead and cutthroat are all native to the Sixes River watershed. The historic abundance and distribution of these salmonids, within the watershed, is poorly understood. However, coho were historically more abundant in the Sixes River basin, and likely more abundant than chinook. Contemporary distributions of coho are likely much reduced from the early settlement period due to habitat modification in the lower reaches. Abundance of coho has also been affected by habitat modifications, primarily in the lower reaches, where overwintering habitat has been lost. Coho populations, however, probably did not exceed more than several thousand fish in the Sixes River watershed. In contrast, the Coquille River had hundreds of thousands of coho. (ODFW 2001)

Information describing historic distribution of chinook within these basins is scant. It is likely however, that contemporary distributions of chinook and steelhead are not considerably reduced from the period when white settlers in the area began altering pristine habitats (ODFW 1995). While considerable information exists regarding the contemporary distribution of spawning and rearing of chinook, coho and steelhead, little is known about contemporary cutthroat distributions. Typically, however, cutthroat are thought to utilize all portions of the basin.

Life History Patterns of Anadromous Salmonids

Table 9 lists the life history characteristics of anadromous salmonids in the south coast watersheds including Sixes River. These characteristics were identified by cross referencing three sources of information: GWEB Oregon Watershed Assessment Manual; Watershed Stewardship, A Learning Guide, Oregon State University Extension Service; and Oregon South Coastal River Basin Fish Management Plan, June, 1995 (ODFW

Table 9 Life History Patterns of Anadromous Salmonids in South Coast Watersheds

Species	Adult Return	Spawning Location	Spawning Period	* Eggs in Gravel	Young in Stream	Freshwater Habitat	Young Migrate Downstream	Time in Estuary	Outmigration Period	Time in Ocean	Adult Weight (average)
COHO	Oct-Jan	coastal streams, shallow tributaries	late fall-early winter	Oct-May	1+yrs	tributaries, mainstem, slack water	Mar-June (2nd yr)	few days - several weeks	fall-winter	2 yrs	5-20 lb (8)
CHINOOK		mainstem large & small rivers				mainstem large & small rivers		days-months		2-5 yrs	
spring	Jan-Jul			Jul-Jan	1+yrs		Mar-Jul (2nd yr)				10-20 lb (15)
fall	Aug-Mar		Nov-Jan	Sep-Mar	3 months		Apr-July	3-4 months	Aug-Oct		10-40 lb
STEELHEAD		tributaries, streams & rivers	Feb-Apr			tributaries		less than a month		1-4 years	
winter	Nov-Jun		Dec-May	Jan-Jul	1-3 yrs		Mar-Jun (2nd-5th yr)		1-3 yrs after hatch		5-28 lb (8)
summer (Col. R.)	Jun-Oct			Feb-Jun	1-3 yrs		Mar-Jun (3rd-5th yr)				5-30 lb (8)
Coastal Sea Run CUTTHROAT	Jul-Dec	small tributaries of coastal streams	Feb-May?	Dec-Jul	1-3 yrs (2 avg.)	tributaries	Mar-Jun (2nd-4th yr)	less than a month **	1-3 yrs after hatch	0.5-1 yrs	0.5-4 lb (1)

* The eggs of most salmonids take 3-5 months to hatch at the preferred water temperature of 50-55 F; steelhead eggs can hatch in 2 months.

** Fluvial and immature sea run cutthroat may reside in estuary through the summer

Working Draft). ODFW Fish Biologist, Todd Confer from the Gold Beach district office, then verified the information.

Threatened and Endangered Species

Table 10 lists the threatened and endangered species according to the National Marine Fisheries Service (NMFS) and ODFW. The Northwest Region of NMFS is responsible for marine and anadromous fishes under the Endangered Species Act. In August 1998 coho, within the Sixes River basin, were listed as Threatened. More recently, in April 2001, the status of steelhead was changed from Candidate to Not Warranted.

Table 10 Threatened and Endangered Species

Species	ESA Status (1)	ODFW Status (2)	Population Trends (3)
Chinook	Not Warranted	Not Warranted / Not Reviewed	Not Available
Coho	Threatened	Not Listed	Not Available
Cutthroat	Not Warranted	Not Warranted / Not Reviewed	Not Available
Steelhead	Not Warranted	Not Warranted / Not Reviewed	Not Available

(1) NMFS – NW Region website //www.nwr.noaa.gov/1salmon/salmesa/specprof.htm

(2) Tim Whitesel, ODFW ESA Coordinator

(3) ODFW – Oregon South Coastal River Basin Fish Management Plan, June, 1995 (Working Draft)

Fish Distribution

Fish distribution maps were obtained in digital format from the ODFW. Due to the resolution of the scale (1:100,000) distribution of all three species was not available for small streams. All maps reflect distribution only; they do not provide any indication of the relative abundance of each species. Furthermore, all maps are in draft form. The following paragraph was adapted from the fish distribution metadata files (ODFW web site) that correspond to the maps. The following paragraph was adapted from the fish distribution metadata files (ODFW web site) that correspond to the maps.

Fish distribution maps illustrate areas of suitable habitat (spawning, rearing and migration) currently believed to be utilized by wild, natural, and/or hatchery fish populations. The term "currently" is defined as within the past five reproductive cycles. This information is based on survey data, supporting documentation and best professional judgment of ODFW staff biologists and in some cases, that of staff from other natural resource agencies within Oregon. Areas displayed may not be utilized by a species of fish on an annual basis due to natural variations in run size, water conditions, and other environmental factors. Due to the dynamic nature of this information, it may be updated at any time. This distribution information makes no statement as to the validity of absence in any particular area; no attempt has been made to verify where fish are not present. Historic genetic origin and current production origin have yet to be defined and are not found as attributes of the distribution data at this time.

Distribution of salmonids occurs throughout significant areas of the Sixes River watershed. However, certain subwatersheds or stream reaches are more prone to provide spawning and summer/winter rearing habitat. Table 11 provides a summary of information that pertains to these important locations.

Table 11 Important Locations for Spawning and Summer/Winter Rearing

Species/Purpose	Location
Steelhead spawning & rearing	Throughout the basin
Chinook spawning & rearing	Middle Fork, North Fork, Upper Mainstem, Edson, Crystal & Dry Creeks

Source: Sixes River Watershed Analysis, Iteration 1.0, USDA Forest Service, Powers Ranger District, Siskiyou National Forest, 1997 and (ODFW 2001)

Spawning Surveys – Peak Counts

Peak counts from spawning surveys provide one measure of fish populations and long term trends in streams and rivers. Spawning surveys on selected rivers range from ½ mile to 2 miles of stream. A trained biologist walks the stream during the peak spawning season (December to January), counting live and dead salmon. Surveys are conducted every 7-10 days. Adverse conditions such as turbidity indefinitely affect the observer’s ability to see fish. The numbers listed in Table 12 reflect the peak counts for each spawning season, from 1995 to 2000. Numbers include both live and dead adult fish; jacks are not included.

Table 12 Chinook Peak Counts from 1995-2000 (ODFW #21534, 21540 & 21542)

Survey	1995	1996	1997	1998	1999	2000	Historic High
Crystal Creek	29	76	38	138	49	43	NA
Edson Creek	97	85	73	164	79	65	NA
Dry Creek	210	273	142	492	177	148	492

Stocking Summary

A summary of stocking or hatchery release data is provided to help identify potential interactions between native and stocked species and to assist in determining if hatchery fish have an influence on current population trends. Stocking data was compiled from two sources: ODFW’s draft basin plan and the local Salmon and Trout Enhancement Program. Local records indicate that the Sixes River watershed has not been stocked since 1963. **Note:** Although not presented here, stocking data, dating from 1947 to 1963, was available from a third source known as Streamnet.

Migration Barriers

In 1995, a group of displaced fishermen were hired by the South Coast Watershed Council to conduct surveys of culverts in an effort to address fish passage concerns. The compilation of data from these surveys became known as the “Hire the Fishermen Survey”. Culverts from this survey, within the Sixes River watershed, were evaluated to determine adult and juvenile fish passage based on guidance (Robinson 1997) from the Oregon Department of Forestry and Oregon Department of Fish and Wildlife.

Initially, culverts were classified as “Adult Barrier,” “Juvenile Barrier,” or “Passable” categories. However, according to more recent standards (Robison, et. al., Spring 1999, Oregon Road/Stream Crossing Restoration Guide) outlet drops exceeding one foot in height are expected to restrict adults of some species. As a result, another category was

created to represent “Adult Restricted”. Additionally, some culvert slope measurements were estimated at 1% with a clinometer. Due to the resolution of these measurements, a degree of uncertainty exists in determining whether these slopes actually met the 0.5% slope criteria. As a result, when slope was the only criteria in doubt, these sites were classified as “Uncertain if Juvenile Barrier”. Similarly, in consideration of adult passage, some culverts were estimated at 4% slope. Thus, when slope was the only criteria in doubt, these sites were classified as “Uncertain if Adult Barrier”. Finally, the Outlet Drop was determined by estimating pool depth at bankfull flow. The assumption was made that bankfull flow is a better estimate of adult migration conditions than the measured summer flow pool depths.

Culvert conditions were evaluated for juvenile and adult salmonid fish passage. The listed criteria applies only to bare culverts. Few culverts surveyed were embedded or baffled. In both cases these criteria are not minimum values; they describe the conditions in which passage of most fish is blocked. Other conditions may still prevent some fish from passing through a specific culvert.

Juvenile Fish Passage Criteria

Slope	<0.5%
Outlet Drop	<6 inches, with residual pool 1.5 times deeper than the jump
Inlet Condition	Diameter > ½ bankfull channel width; no inlet drop
Length	<100 feet long

Adult Fish Passage Criteria

Slope	<4%
Outlet Drop	<4 feet, with residual pool 1.5 times deeper than the jump or 2 feet deep
Length	<200 feet long

Culverts, bridges and fords were assessed by the “Hire the Fishermen Survey”. Some culverts and bridges have been more recently assessed and are included as well. Stream crossings were labeled by a “Site ID” and an estimated length of potential fish habitat. Potential fish habitat upstream of each culvert was measured, for all Hire The Fishermen culverts, to an estimated channel gradient of 16%. Stream channels greater than 16% gradient are considered “Very Steep Headwaters” as described in the Channel Habitat Component of this watershed assessment. Salmonid fish habitat in these very steep headwater channels provides only very limited rearing.

Stream Surveys

The ODFW has developed a standard stream habitat survey methodology (Moore et al. 1997) that they and other agencies and some industrial landowners have used to collect extensive amounts of fish habitat data. An assessment of existing stream habitat survey data was conducted in the Sixes River basin to help determine how habitat conditions vary throughout the watershed and/or to identify specific portions of the watershed where problems may exist. Existing stream survey summary data was compiled in GIS format from the Southwest Oregon Province GIS Data CD (shapefile titled “Stream Survey

Data”). Sampled conditions were compared to “benchmark” conditions established by the ODFW. Conditions were rated as Undesirable (U), Desirable (D), or in-between range (B). The overall condition rating was assigned using the following criteria:

- **Desirable (D):** All parameters rated desirable or in-between
- **Between (B):** Parameter ratings were mixed
- **Undesirable (U):** Most of the parameters rated undesirable
- **ND:** No data

ODFW HABITAT BENCHMARKS (GWEB 1999)

The ODFW habitat benchmark values are designed to provide an initial context for evaluating measures of habitat quality. While the natural regime of a stream depends on climate, geology, vegetation, and disturbance history, it is useful to know whether a value of a habitat feature in a reach of stream is high or low. For example, knowing whether a reach has a lot of large woody debris (LWD) or fine sediments is useful for understanding the condition of aquatic habitat and its influence on the life history of fishes. The determination of whether the “value” of a habitat feature is “good” or “bad” depends on the natural regime of the stream and the fish species of interest. The habitat benchmark values for desirable and undesirable conditions are derived from a variety of sources. Values for specific parameters were derived for appropriate stream gradient, and regional and geologic groupings of reach data (see Moore et al. 1997). This assessment is designed to look at combinations of features rather than to single out individual values. This approach should help identify patterns within these features that can then be interpreted in a broader watershed context.

The benchmark values of habitat features are listed as desirable or undesirable, but emphasis should be applied to view the values on a sliding scale, and that watershed context be considered. For example, eight pieces of LWD per 100 meters may be very low for a stream in the Cascade Mountains, but extremely high for a stream in the high desert of southeast Oregon. The stream must be viewed within its natural environment. Similarly, a reach in the Cascade Mountains may have eight pieces of LWD per 100 meters, but neighboring reaches may have 25 pieces of LWD per 100 meters. Variability within a watershed may reflect normal disturbance and hydrologic cycles in addition to management history. The assessment of habitat conditions should look to other components of the watershed assessment to find if there are historic or current activities influencing these measures. This provides the basis for linking the findings from the broader assessments of upslope and upstream activities and impacts to actual in-channel conditions.

Tables 13, 14, and 15 (See Appendix) include summaries of available stream survey data, individual benchmark ratings and overall habitat ratings based on various habitat attributes. Specifically, the tables include a Riparian Habitat Condition Summary (Table 13), Pool Habitat Condition Summary (Table 14), and Riffle and Woody Debris Habitat Condition Summary (Table 15).

Caution: Stream survey data is like a single photograph of a dynamic system. Stream channel conditions may change drastically between years, especially if there has been a

high flow (flood) event. Also, some surveyed reaches have been inconsistently sampled, and the summary data do not necessarily reflect actual conditions.

C KEY FINDINGS

Threatened and Endangered Species

- Coho have been listed as Threatened, according to the Endangered Species Act, since August 1998. No other salmonids are currently listed.

Fish Distribution

- Winter steelhead are well distributed throughout the basin and extend into all subwatersheds including the headwaters of Sixes River.
- Fall chinook are also found well distributed throughout the watershed although not to the extent of steelhead. Fall chinook migrate to all subwatersheds except for the South Fork.
- Coho share a similar distribution to chinook in the Sixes River basin. Like chinook, coho are found in all subwatersheds except for the South Fork.

Stocking Summary

- Local records indicate that the Sixes River watershed has not been stocked since 1963.

Migration Barriers

- Among the culverts that were evaluated in this assessment three were assessed as adult barriers; one was assessed as adult restricted and three were assessed as juvenile barriers. Consultation with ODFW fish biologists and site visits are recommended to verify fish passage barriers and estimated habitat above each barrier.
- Other human-caused migration barriers potentially exist. These include culverts that warrant additional surveys to determine if they meet criteria for both adult and juvenile passage. (*See Migration Barrier Map for uncertain barriers.*)

Riparian Habitat Condition Summary

- Large conifers very scarce near channel in all reaches.
- Shade is good for all reaches, except North Fork Sixes Trib 2.
- Bank stability is good, with low values for bank erosion.
- Secondary channel areas are low, with the highest (7.4%) in Beaver Creek reach #3

Pool Habitat Condition Summary

- Pool area and frequency generally desirable or between, except for Sugar #2, a small steep stream.
- Pool depths mostly undesirable or between. Cross check with sediment module.
- Very few complex pools recorded, most reaches with no data.
- Overall pool conditions mixed, with 3 of 11 reaches desirable, 3 of 11 between, and 5 of 11 undesirable

Riffle and Woody Debris Habitat Condition Summary

- Width to depth ratios all in moderate range.
- Gravel adequate in most reaches, moderate in Sugar Creek reaches.
- Large wood generally lacking in all parameters, except for Carlton #1.
- No data is available for key pieces in 6 of 11 reaches. Check with ODFW Aquatic Inventory Project for key pieces on Carlton #1

REFERENCES

GWEB 1999. Oregon Watershed Assessment Manual. Governor's Watershed Enhancement Board, July 1999


ODFW 1995. Oregon South Coastal River Basin Fish Management Plan, Working Draft, June 1995).

ODFW 2001. Personal communication with Todd Confer, Fish Biologist, Oregon Department of Fish and Wildlife – Gold Beach, Oregon.


OSU 1998. Watershed Stewardship - A Learning Guide, Oregon State University Extension Service, July 1998

Robinson 1997. Oregon Road/Stream Crossing Restoration Guide

Sixes River Human-Caused Migration Barriers & Estimation of Fish Habitat Above Stream Crossings (miles)

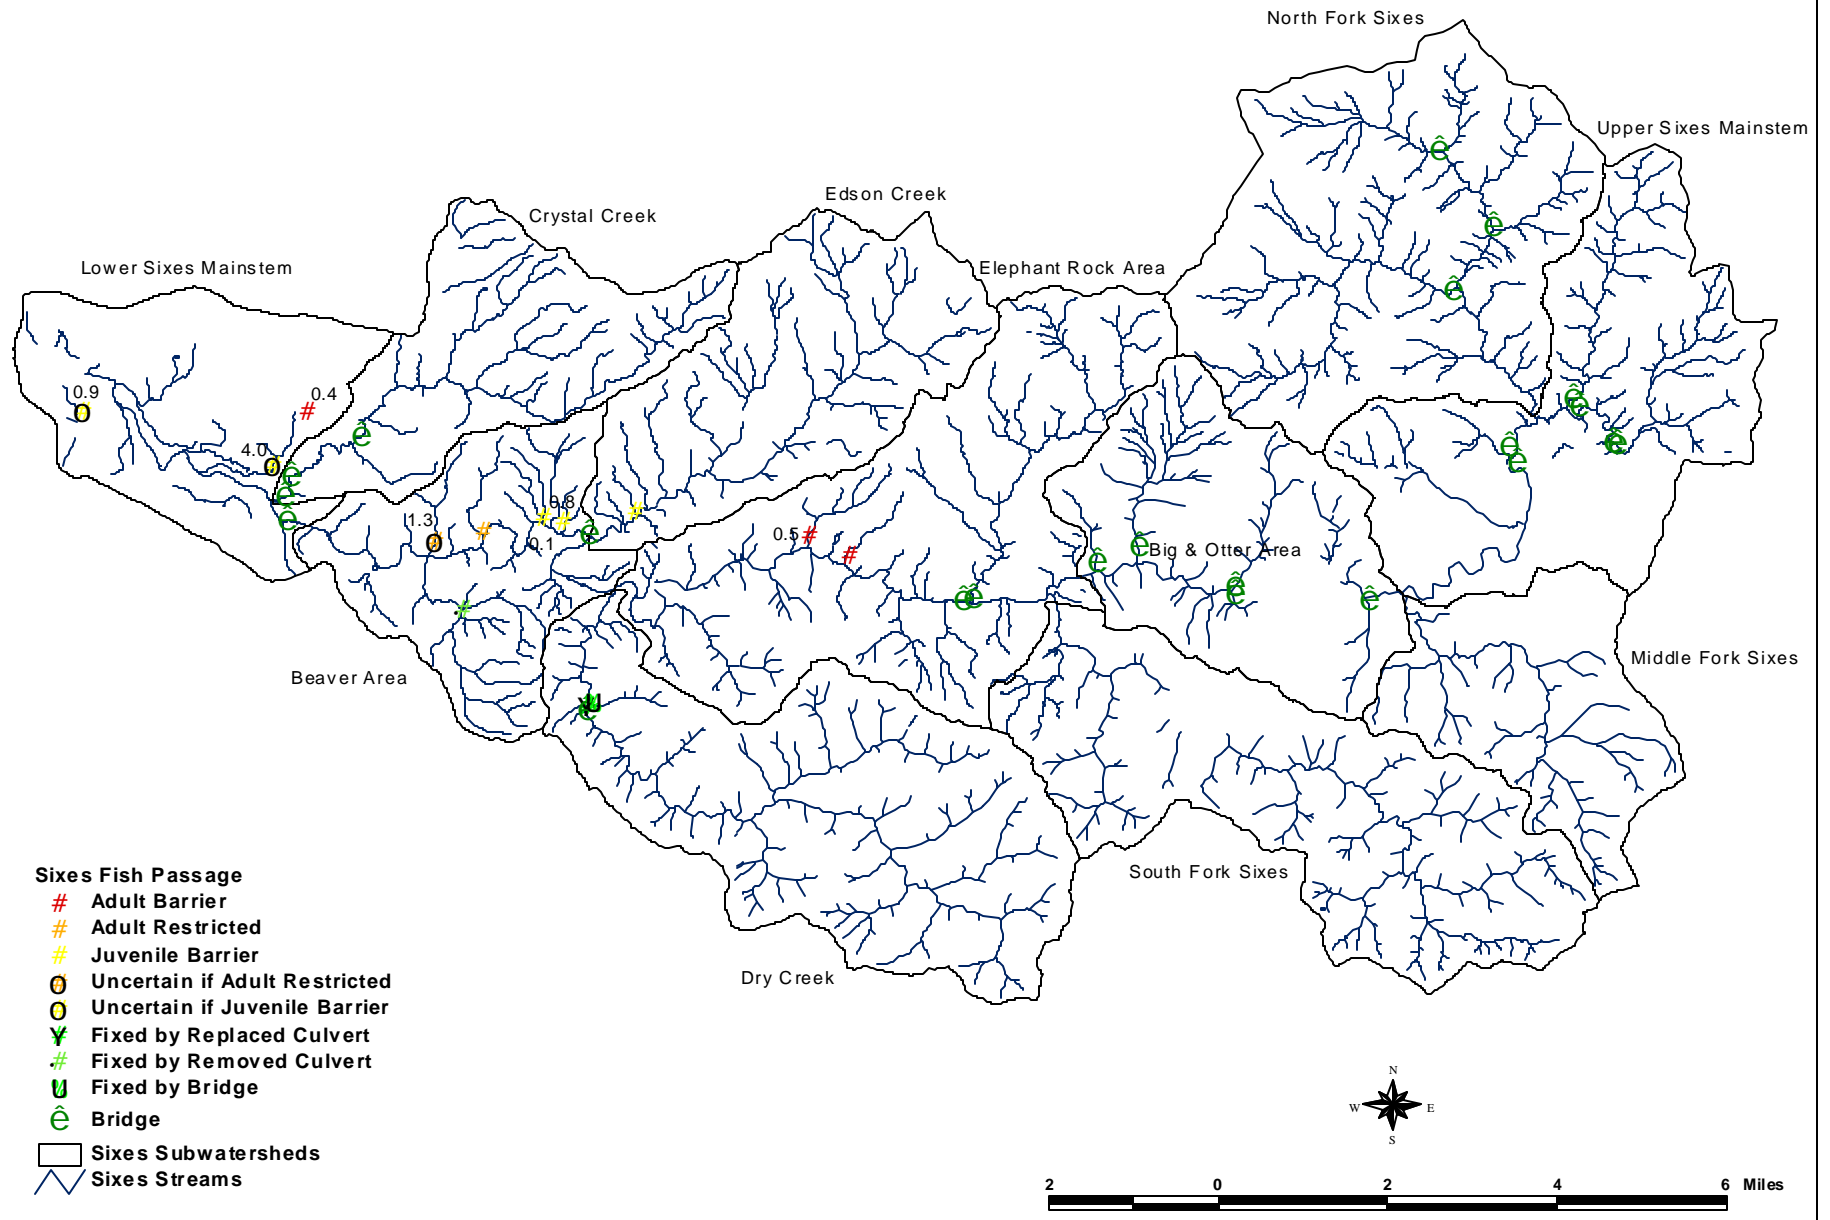


Sixes River Winter Steelhead Distribution

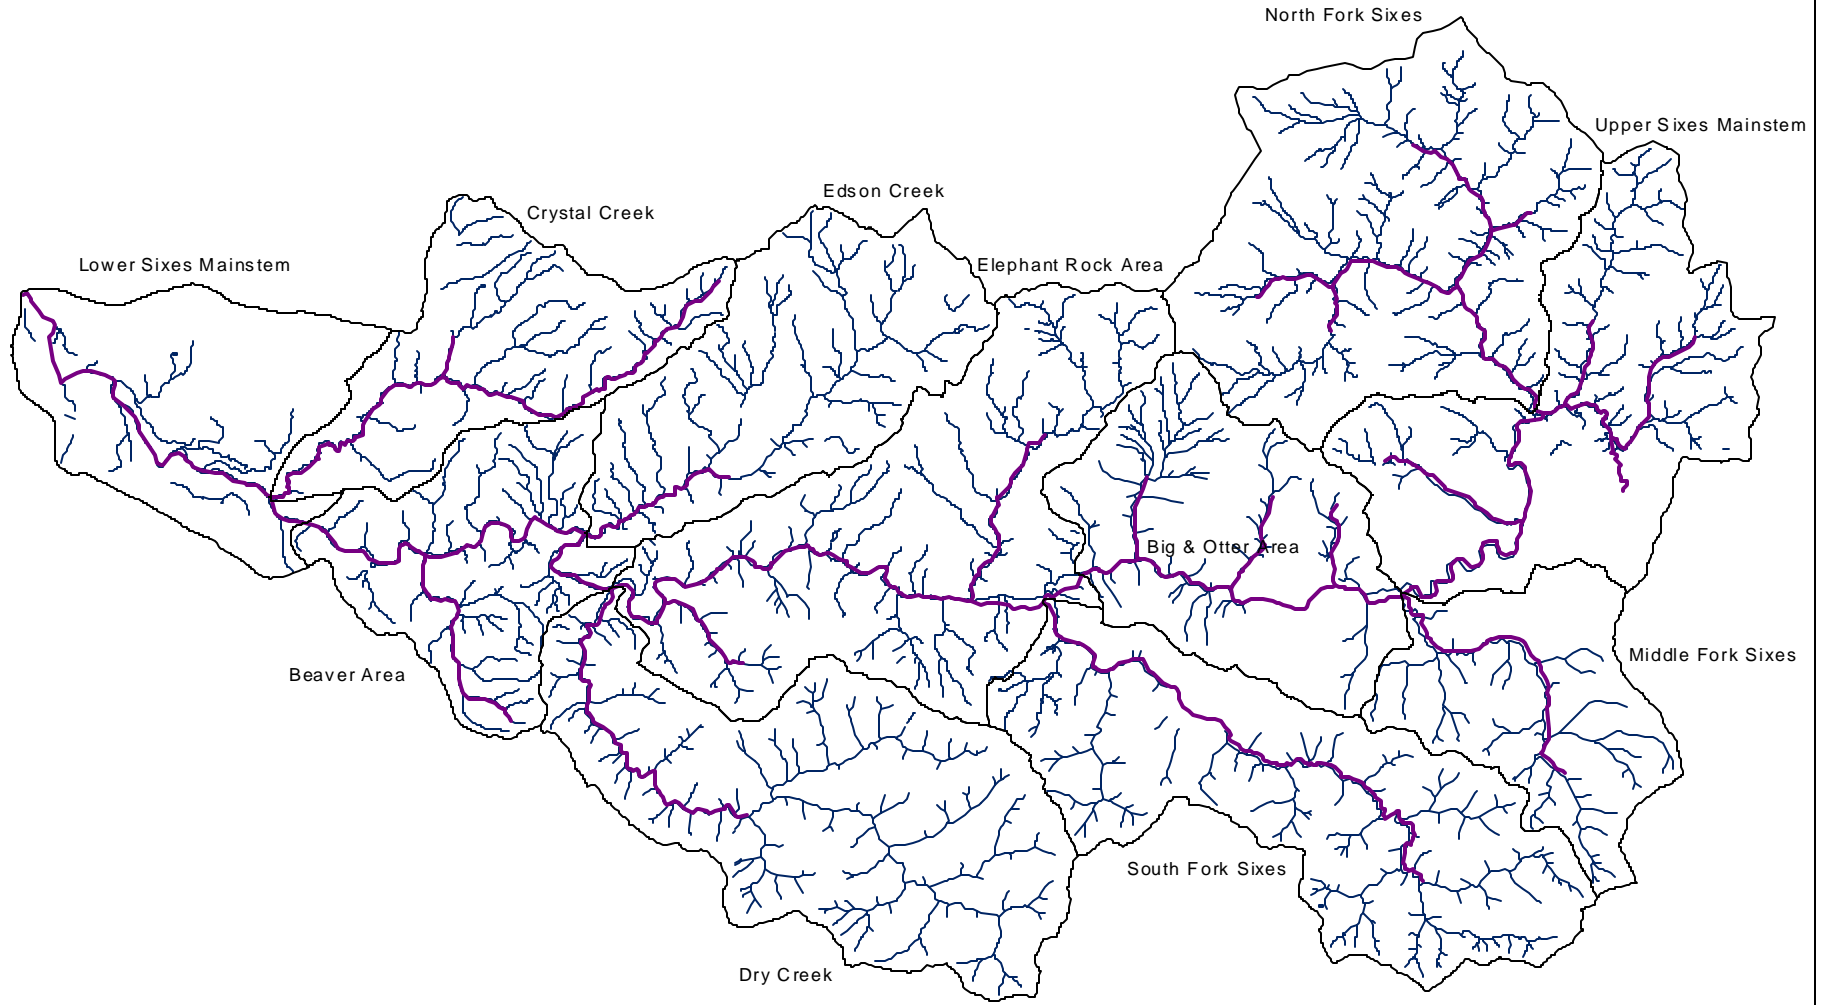

-  Sixes Subwatersheds
-  Sixes Winter Steelhead Distribution
-  Sixes Streams




Sixes River Coho Distribution

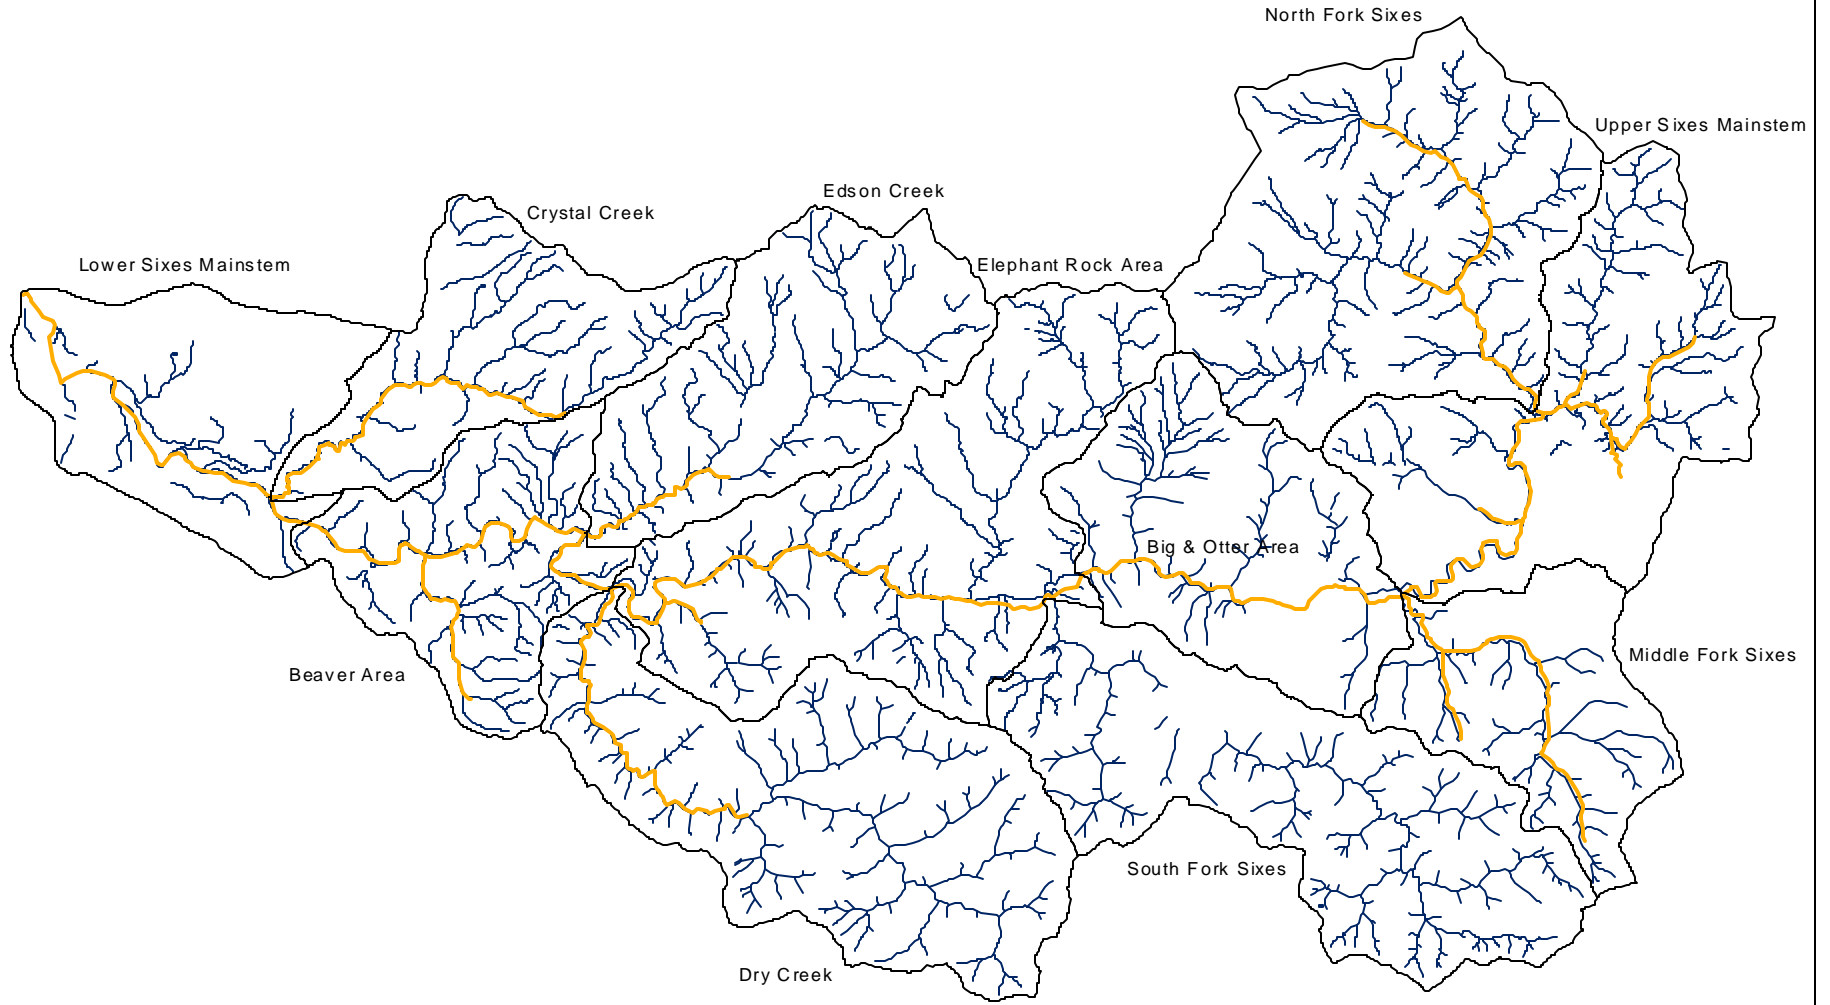


□ Sixes Subwatersheds
— Sixes Coho Distribution
— Sixes Streams



Sixes River Fall Chinook Distribution

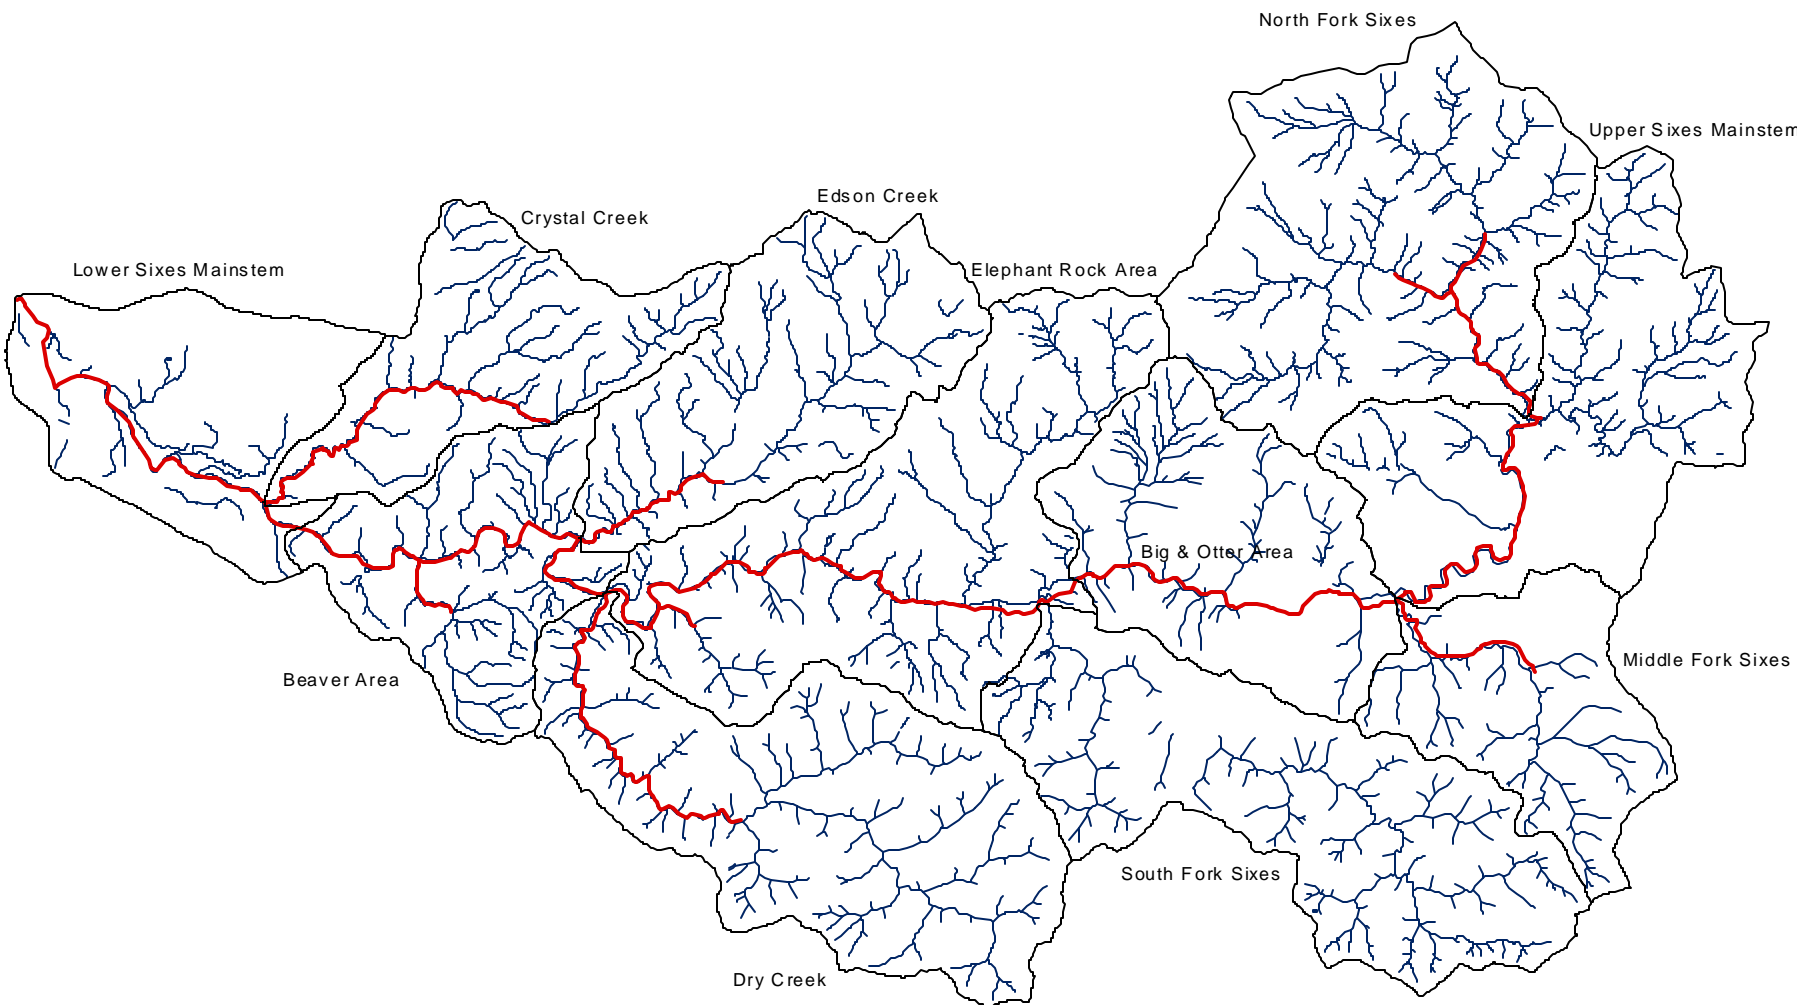

□ Sixes Subwatersheds
▬ Sixes Fall Chinook Distribution
▬ Sixes Streams



VI WATER QUALITY ASSESSMENT

A BACKGROUND (GWEB 1999 and OSU 1998)

A combination of natural watershed processes and the effect of human activities determine water quality at a particular site on a stream or river. All water contains some dissolved chemical elements, particulate matter, and organic matter. The amounts of these substances vary with different watershed conditions. Water quality is described in terms of the beneficial uses of water and the level of quality needed to support those uses. Measures of water quality – the criteria or indicators – provide the connection between the beneficial uses of water and the natural and human sources of watershed inputs.

Beneficial Uses of Water

The streams and rivers in the diverse landscapes of Oregon support different uses of water. To focus the water quality assessment, it is necessary to identify the beneficial uses of water that are important in a watershed as well as those that are specifically identified in the Oregon water quality standards. Beneficial uses determine which water quality criteria apply. For example, assessment for drinking water primarily focuses on the presence of pathogens that can cause disease or chemicals that can contribute to long-term health effects such as cancer risk. Assessment for water that supports fish populations focuses on elements of the stream system such as temperature, dissolved oxygen, metals, nutrients, and chemical contaminants.

Criteria and Indicators

Water quality criteria provide a warning system when activities in a watershed are limiting beneficial uses. Water quality criteria are specifically established in the State Water Quality Standards by major river basin. Water quality indicators are used when the state standards do not specify numerical criteria. Water quality concerns can be grouped into several major categories for analysis: temperature, dissolved oxygen, pH, nutrients, bacteria, turbidity and toxics. Water quality status can also be evaluated indirectly by examining the health of the aquatic community using aquatic invertebrates and fish populations.

Stream Temperature

Cool water temperatures are necessary features of streams that support salmonid fish and the associated aquatic community. Suitable temperature ranges have been evaluated for all life history stages of salmonids – adult migration, spawning, egg incubation, embryo development, juvenile rearing, and juvenile migration. Growth and reproduction are adversely affected when water temperature is outside of the range to which these organisms were adapted.

The biological rationale for temperature criteria is based on laboratory and field studies. Laboratory studies evaluate egg development rate and juvenile survival under constant temperatures. Field studies evaluate the effect of water temperature on adult and juvenile migration behavior and adult spawning behavior. Oregon water quality standards are established to protect fish populations based on sublethal effects on fish, such as

susceptibility to disease, inability to spawn, reduced survival rate of eggs, reduced growth and survival rate of juveniles, increased competition for limited habitat and food, and reduced ability to compete with other species. A general numerical standard of 64° Fahrenheit (7-day moving average of maximum temperatures) was established in Oregon on the basis of preventing these sublethal effects. Several documents (Boyd and Sturdevant 1997, Oregon Department of Environmental Quality 1995) have been published by state agencies to help understand the technical basis for the standard, and what managers and land owners can do to meet the standard.

The evaluation criteria for stream temperature is a daily maximum 64° F standard that is applied to the average of the maximum temperatures for the warmest 7 consecutive days (known as the “7-day max”). The daily maximum temperature is determined from readings at hourly or half-hour intervals for each day during the monitoring period, usually mid-June through mid-September. The difference between the coolest and warmest temperature during the warmest 7 consecutive days is known as ΔT . High ΔT values result from solar exposure, and may be used to indicate reaches where additional shade can limit the sun’s ability to warm the stream. Quite strictly, shade does not lower temperature it simply blocks the sun from warming the stream.

Dissolved Oxygen

High dissolved oxygen is a basic physiological requirement of cold-water fishes such as native salmon and trout. Critical dissolved oxygen levels for various life stages have been evaluated in laboratory and field studies. The early larval stages of fish are wholly dependent on the transfer of oxygen within the redd, the salmonid gravel nest. When oxygen is below saturation, salmonid embryos are smaller than usual and hatching is either delayed or is premature. Salmonid juveniles survive in dissolved oxygen less than saturation, but growth, food conversion efficiency, and swimming performance are adversely affected. Water quality criteria are established to provide for the natural fluctuations below saturation while assuring sufficient dissolved oxygen to protect aquatic life. The concentration of dissolved oxygen is a function of many factors: water temperature, surface and intragravel water interchange, water velocity, substrate permeability, and the oxygen demand of organic material. The content of oxygen in water is directly related to water temperature and barometric pressure, and therefore, temperature and pressure (estimated through elevation) must be measured at the same time.

The Oregon Water Quality Standards contain a number of dissolved oxygen criteria. More restrictive criteria are specified for dissolved oxygen during the period that salmonid fish are spawning (11 mg/l). Also, the standards specify a dissolved oxygen concentration (8 mg/l) in the gravel used by spawning fish. For the purposes of this assessment, the evaluation criteria is set at a minimum of 8 mg/l in the water column for cold water fish.

pH

The pH is a measure of the hydrogen ion concentration of water. pH is measured in a logarithmic scale, with pH below 7 indicating acidic conditions and pH above 7

indicating alkaline conditions. PH of water is important in determining the chemical form and availability of nutrients and toxic chemicals. Measurement of pH is especially important in mining areas because there is potential for both generation of heavy metals and a decrease in pH. Metal ions shift to a more toxic form at lower pH value. The pH of waters varies naturally across Oregon due to the chemical composition of the rock type in the watershed and the amount of rainfall. Eastside basins generally will have more alkaline water than westside or coastal basins.

The Oregon Water Quality Standards specify the expected pH range for all basins in Oregon. For the purposes of this assessment, the evaluation criteria is set at 6.5 to 8.5 for all westside basins. It should be recognized that, like dissolved oxygen, pH also varies in streams naturally throughout the day due to the photosynthesis and respiration cycles of attached algae.

Nutrients

Nutrients refer to chemicals that stimulate growth of algae and aquatic plants in water. In fast-moving streams, algae grow attached to the substrate and are called “periphyton.” Algae and aquatic plants are a necessary part of the stream ecosystem and act as the primary producers in a stream – processing the sun’s energy into food for stream fish. Excess algae and aquatic plant growth, however, becomes a problem in slow moving streams and rivers, and in still waters such as ponds and lakes. The excessive growth can result in low or no dissolved oxygen and interfere with recreation, and certain algae can produce chemicals that are toxic to livestock and wildlife. Phosphorous and nitrogen are the major growth-limiting nutrients in water, and are therefore the focus of a water quality evaluation.

Total phosphorous measures primarily phosphates in the water column and phosphorous in suspended organic material. Total nitrate (commonly measured as nitrite plus nitrate) provides a measure of the majority of nitrogen present in surface waters. Evaluation criteria are based on literature values that have been identified as causing excessive plant growth.

For the purposes of this assessment, the evaluation criteria is set at 0.05 mg/l for total phosphorous and 0.30 mg/l for total nitrates.

Bacteria

Bacteria in the coliform group are used as indicators to test the sanitary quality of water for drinking, swimming, and shellfish culture. Bacteria in the coliform group are found in wastes associated with warm-blooded animals, including humans, domestic animals, and other mammals and birds; these bacteria are indicators of contamination of surface waters by sewage, feedlots, grazing, and urban runoff. The State of Oregon specifies the use of Escherichia coli (E.coli) as the bacterial indicator for water contact recreation, such as swimming, and fecal coliform bacteria as the indicator in marine and estuarine waters for shellfish growing. E.coli is a more specific test for organisms that occur in warm-blooded animals. The fecal coliform procedure tests positive for some bacteria

that occur naturally in the environment, but has generally been accepted as a good screening tool.

Fecal coliform bacteria enter streams from many sources associated with human and animal wastes in urban and agricultural watersheds. In rangelands, bacterial contamination occurs primarily from direct deposition of fecal material in streams. Good vegetative cover on the upslope areas and dense riparian vegetation impedes contaminated runoff from reaching streams. Once coliform bacteria enter streams, the majority settles to the bottom and is attached to sediment particles. The stream sediments can act as a reservoir for fecal coliform bacteria; bacteria are resuspended when bottom sediments are disturbed through increased turbulence or animal movement.

For the purposes of this assessment, the evaluation criteria is set at 406 E. coli/100ml in fresh waters and 43 fecal coliform/100ml in marine waters.

Turbidity/Suspended Sediment

Turbidity is a measure of the clarity of water. In most cases, water is cloudy due to runoff of sediment, and therefore turbidity is a useful surrogate for measuring suspended sediment. However, turbidity can also be caused by other sources of suspended material such as algae. Suspended sediment can directly affect fish by damaging their gills and reducing the feeding ability of sight-feeding fish such as salmonids. Suspended sediment is a carrier for other pollutants (nutrients, pesticides, and bacteria) and is therefore a concern for water quality in general. In addition, suspended sediment interferes with recreational uses and the aesthetic quality of water.

Turbidity varies naturally with the soil type in a landscape. The small particle sizes, silts and clays, will stay suspended for long periods and cause turbidity. Soils that break down into sand size fractions will settle to the bottom and result in comparatively low turbidity values. Turbidity in a stream will increase naturally during storm and runoff events. This high variability makes it difficult to establish a simple, meaningful criterion. For the purposes of this assessment, the evaluation criteria is set at 50 NTU. Turbidity at this level interferes with sight-feeding of salmonids and therefore provides a direct indicator of biological effect. *The unit of measure, an NTU (nephelometric turbidity unit), is based on the original measurement device and has no direct meaning.*

Toxic Contaminants: Organic Compounds, Pesticides, and Metals

The term “contaminants” refers to chemicals that may cause toxicity in aquatic organisms. Due to the lack of data pertaining to toxic contaminants in the Sixes River watershed no further assessment was conducted.

B INTRODUCTION

The water quality assessment is based on a process that first identifies the beneficial uses that occur within the watershed (See Table 16). Evaluation criteria that apply to these uses are then identified and finally, water quality conditions are identified by comparison of existing data with these criteria. This conceptual framework is consistent with the

guidelines established by the U.S. Environmental Protection Agency (EPA) under the authority of the federal Clean Water Act and the water quality programs of the Oregon Department of Environmental Quality (ODEQ). The goal of the federal Clean Water Act, “to protect and maintain the chemical, physical and biological integrity of the nation’s waters,” establishes the importance of assessing both water quality and the habitat required for maintaining fish and other aquatic organisms.

The requirements for in-stream water quality are based on protection of recognized uses of water. In practice, the sensitive beneficial uses drive the evaluation of water quality and are the basis for establishing best management practices.

Aquatic species, particularly salmonid fish, are often considered the most sensitive beneficial uses in a watershed. Salmonid species are adapted to cold water, high gradient habitats where temperatures are cool and dissolved oxygen is high. Salmonids have highly variable life histories but display similarity in laying eggs in gravels and have fry and juveniles that rear close to where they hatch from the egg. These early life stages are particularly sensitive to changes in water quality. Water quantity affects water quality parameters and subsequently fish, especially during summer low flow conditions. Extracting too much water from a system is just as harmful to fish as are certain water-quality parameters.

Table 16 South Coast Beneficial Uses

Beneficial Uses	Estuaries & Adjacent Marine Waters	All Streams & Tributaries
Public Domestic Water Supply (1)		X
Private Domestic Water Supply (1)		X
Industrial Water Supply	X	X
Irrigation		X
Livestock Watering		X
Anadromous Fish Passage	X	X
Salmonid Fish Rearing	X	X
Salmonid Fish Spawning	X	X
Resident Fish & Aquatic Life	X	X
Wildlife & Hunting	X	X
Fishing	X	X
Boating	X	X
Water Contact Recreation	X	X
Aesthetic Quality	X	X
Hydro Power		X
Commercial Navigation & Transportation	X	X

(1) With adequate pretreatment (filtration and disinfection) and natural quality to meet drinking water standards. SA\Table\WH5291.5 (ODEQ web site)

Water Quality Limited Streams 303(d) List

The ODEQ is required by the federal Clean Water Act to maintain a list of stream segments that do not meet water quality standards. This list is called the 303(d) List because of the section of the Clean Water Act that makes the requirement. The U.S. Environmental Protection Agency has approved ODEQ's 1998 list. (ODEQ web site)

Table 17 illustrates the Water Quality Limited Streams that pertain to the Sixes River watershed. The 7-day maximum temperatures listed below reflect the highest on record as of 2000.

Table 17 Sixes River Water Quality Limited Streams

Tributary / Reach	Boundary	Parameter	Listing Status	Highest As of 2000	
				7-day max	Hrs >64 F
Sixes River	Mouth to Headwaters	Temperature	303(d) List	76 in 1998	1,725
	Mouth to Headwaters	Sedimentation	Need data		
South Fork	Mouth to Headwaters	Temperature	303(d) List	73 in 1999	
Rusty Creek	Unknown	Habitat Modification	Need data		
Benson Creek	Unknown	Sedimentation	Need data		

Water Quality Criteria Applicable to the Sensitive Beneficial Uses

Evaluation criteria are based on an interpretation of narrative and numeric standards in the Oregon Water Quality Standards. Where numerical criteria are not provided in the state standards, evaluation indicators have been identified based on the literature. Indicators are useful for evaluating water quality conditions, but do not have any regulatory standing.

Summary of Water Quality Criteria and Evaluation Indicators

Water Quality Attribute	Evaluation Criteria	Evaluation Indicator
-------------------------	---------------------	----------------------

Temperature	Daily maximum of 64° (7 day moving average)	
Dissolved Oxygen	8.0 mg/l	
pH	6.5 to 8.5 units	
Total Phosphorous		0.05 mg/l
Total Nitrate		0.30 mg/l
E. coli	406 E. coli/100ml (no single sample can exceed the criteria)	
Fecal coliform	43 fecal coliform/ 100ml (not more than 10% of samples)	
Turbidity		50 NTU maximum

C METHODOLOGY

- Water quality conditions were evaluated using available data from the ODEQ’s ambient water quality monitoring site on Sixes River at Highway 101. Data was collected approximately once every three months from 1995 to 2000. To facilitate the evaluation of data, two datasets were combined: “Ambient” and “Lasarface”. Some water quality data were also obtained by searching an unformatted database known as STORET. *(The Lasarface dataset contains ODEQ’s comprehensive records of water quality data. The Ambient spreadsheet was used for calculating the Water Quality Index for 1989 to 1998 but only includes eight water quality parameters.)*
- Flow data from the Elk River gage was provided, where available, to provide a context regarding hydrologic influences in a nearby watershed.
- Water quality data were compared to evaluation criteria or indicators.
- The percent exceedance of criteria was calculated for each water quality parameter.
- An impairment category from the following table was assigned for each parameter.

Criteria for Evaluating Water Quality Impairment

Percent Exceedance of Criteria	Impairment Category
(<15%)	No Impairment No or few exceedances of criteria
(15-50%)	Moderately Impaired Criteria exceedance occurs on a regular basis
(>50%)	Impaired Exceedance occurs a majority of the time
Date lacking/insufficient	Unknown

D RESULTS

Table 18 Water Quality Data Evaluated from Ambient and Lasarface Databases
(See Appendix)

Table 19 Flow Data from Elk River Gage (See Appendix)

Table 20 Evaluation of Water Quality Conditions

Statistic	Dissolved Oxygen (mg/l)	pH (SU)	Total Nitrate (mg/l)	Total Phosphorous (mg/l)	Fecal Coliform (MPN)	E. coli (cfu/100 ml)	Turbidity (NTU)

Samples	42	42	42	43	40	7	9
Minimum	6.4	6.6	0.02	0.005	1	2	0.8
Maximum	13.8	7.9	0.64	0.51	600	122	8
Median	10.4	7.5	0.22	0.02	17.5	12	1
# Exceedance	1	0	9	10	10	0	0
% Exceedance	2.38	0	21.43	23.26	25	0	0

Table 21 Summary of Water Quality Impairment

Monitoring Site	DO (mg/l)	pH (SU)	Total Nitrate (mg/l)	Total Phosphate (mg/l)	Fecal Coliform (MPN)	E. Coli (cfu/100 ml)	Turbidity (NTU)	Summary of Miles Impaired*
Sixes River at Hwy 101	None	None	Moderate	Moderate	Moderate	None	None	5.5

*Summary of Miles Impaired: If any box is rated as Moderately Impaired or Impaired, the Summary is rated as Impaired.

Stream Temperature

Many streams in Curry County currently exceed the state’s temperature standard and have been subsequently listed as “water quality-limited” on the 303(d) list. In the Sixes River watershed there are two locations that are officially recognized on this list. They include the Sixes River, from the mouth to its headwaters and the South Fork, from the mouth to its headwaters.

Under the Clean Water Act, water quality management plans are required to lower stream temperatures to meet the standard over time, or to justify setting a new standard to be met. The collection of stream temperature data and corresponding flow data has helped landowners and agencies establish realistic, watershed-specific targets for shade and water temperature.

Since 1995, the South Coast Watershed Council has received funding from the Oregon Watershed Enhancement Board and Oregon Department of Environmental Quality to support monitoring for the Oregon Salmon Plan. Standard methods and accuracy checks were used for deploying recording thermographs (thermometers) as described in the *Stream Temperature Protocol* chapter of *Water Quality Monitoring Guide Book*. A Quality Assurance Project Plan provides direction for procedures.

Stream temperature data is collected to assist watershed council members and interested citizens assess where to focus efforts on restoring streamside vegetation in order to reduce exposure to the sun. The South Coast Watershed Council has monitored stream temperature and corresponding streamflow in the Sixes River basin since 1995. Stream temperature monitoring provides baseline data, long-term trend data and educational opportunities. As a result, stream reaches can be prioritized to voluntarily plant or manage vegetation in order to produce adequate shade. Monitoring also assists to measure the effectiveness of riparian restoration projects.

The following tables represent key characteristics of summarized data compiled by the South Coast Watershed Council’s Monitoring Program, Siskiyou National Forest, BLM

and the Oregon Department of Fish and Wildlife. Table 22 illustrates the 7 Day Max Values that represent annual trends from 1990 to 2000. Table 23 illustrates the locations, number of days and associated years that exceed the state's temperature standard. All data was obtained from the Monitoring Program's Stream Temperature Report. In most cases on public lands, resource personnel from the agencies listed above measured the 7-day max values. For more details please contact the South Coast Watershed Council's Monitoring Coordinator.

Table 22 Annual Trends – 7-Day Max Values (Degrees Fahrenheit)

Location	2000	1999	1998	1997	1996	1995	1994	1993	1992	1991	1990
South Fork Sixes		73.4		63.4	64.3		62.2	62.1	65.1	63.7	
Mainst. below Elephant Rock Cr		68.5	71.4								
Mainstem above Dry Creek		74.1	76.3								
Dry Creek		66.0		68.2	67.0	67.7	66.5	65.3	68.2	68.2	68.0
Mainstem above Edson Crk	72.0	70.4		72.1		72.0	72.4				
Edson Creek	65.9	64.8	66.8		64.8	66.8					
Mainstem @ Hwy 101	72.3	72.8	73.2	71.4	70.1	71.9	72.5				
Crystal Creek @ Hwy 101	70.0	68.2									

Shaded temperature = ODFW recorded 72.7 F at nearby site

Table 23 Days >64° F (7-day max values)

Location	2000 Days > 64°	1999 Days > 64°	1998 Days > 64°	1997 Days > 64°
Mainstem above Edson Creek	>10			
Edson Creek above campground	17	20	47	
Mainstem at Hwy 101 bridge	78	80	83	79
Crystal Creek upstream		39		
Crystal Creek at Hwy 101 bridge	63	60		
South Fork at mouth				
Mainstem below Elephant Rock Creek				
Mainstem above Dry Creek		89	86	
Dry Creek at North Fork boundary				
Mainstem above Edson Creek		84		
Mainstem at Cape Blanco State Park		40		

Oregon Water Quality Index (ODEQ 2000)

The Oregon Department of Environmental Quality Laboratory maintains a network of ambient water quality monitoring sites. These sites were selected to provide representative statewide geographical coverage, and to include major rivers and streams throughout the state. There are currently 156 monitoring sites in the network. One site is situated on Sixes River at Highway 101, river mile 5.5. *Note: Water quality data collected at this site is the same data used above.*

Water quality data collected at these sites, in water years 1989-1998, were included in the Oregon Water Quality Index (OWQI). The index was developed for the purpose of providing a simple, concise and valid method for expressing the significance of regularly generated laboratory data, and was designed to aid in the assessment of water quality for general recreational uses. (C. Cude, ODEQ)

The OWQI analyzes a defined set of water quality variables and produces a score describing general water quality. The water quality variables included in the index are temperature, dissolved oxygen (percent saturation and concentration), biochemical oxygen demand, pH, total solids, ammonia and nitrate, nitrogen, total phosphorous, and fecal coliform. OWQI scores range from 10 (worst case) to 100 (ideal water quality).

OWQI results were calculated for each site on all samples taken in Water Years 1989-1998. Seasonal averages were calculated for the summer season (June – September) and fall, winter and spring seasons (October – May). The minimum of these seasonal averages was used for ranking purposes; seasonal variability between river systems was considered.

A classification scheme was derived from application of the OWQI to describe general water quality conditions. OWQI scores that are less than 60 are considered very poor; 60-79 poor; 80-84 fair; 85-89 good; and 90-100 excellent. To account for differences in water quality between low-flow summer months (June-September) and higher-flow fall, winter, and spring months (October-May), average values for summer and fall, winter, and spring were calculated and compared. Rankings were based on the minimum seasonal averages.

Results for the Sixes River, during years 1986-1995, revealed a summer average score of 91 (excellent) and a fall, winter, and spring score of 62 (poor). Results during years 1989-1998 revealed a summer average of 91 (excellent) and a fall, winter, and spring score of 67 (poor). No trend analysis was conducted due to insufficient data.

E KEY FINDINGS

Dissolved Oxygen, pH, Total Nitrates, Total Phosphates, Fecal Coliform, E. coli, Turbidity, & Biological Oxygen Demand

- Water quality is moderately impaired in the Sixes River due to high nitrate, phosphorous, and fecal coliform levels.

- Dissolved oxygen occurs in August and September during the lowest recorded flows and highest recorded temperatures.
- Nitrate levels tend to exceed water quality standards during the early winter sampling period. This may correlate with high flow events. One exception was a sample taken in March that also exceeded the standard.
- High phosphate and fecal coliform levels tend to occur from fall through early spring. This may be correlated with high flow events.

Temperature

- Mainstem Sixes River temperatures often exceed 7-day maximum temperature standards of 64° F in summer.
- Generally tributaries throughout the basin cool the mainstem.
- Heating reaches are between (1) Elephant Rock Creek and Dry Creek and (2) Edson Creek and the Highway 101 Bridge.
- Warmest reach – mainstem above Dry Creek (75.2° F)
- Coolest reach – South Fork (64.8° F)

Oregon Water Quality Index

- Water quality conditions at the Sixes River at US Highway 101 are generally very good or excellent. However, during periods of heavy precipitation and high flows, high concentrations of total phosphates, total solids, and biochemical oxygen demand, indicating erosion and field runoff, inhibit water quality. Summer OWQI values show excellent water quality on the average, while fall, winter, and spring can be poor, especially during heavy precipitation.

REFERENCES

GWEB 1999. Oregon Watershed Assessment Manual. Governor's Watershed Enhancement Board, July 1999

OSU 1998. Watershed Stewardship - A Learning Guide, Oregon State University Extension Service, July 1998

ODEQ 2000. Oregon's 2000 Water Quality Status Assessment Section 305(b) Report

VII SEDIMENT SOURCES


A BACKGROUND (GWEB 1999)

Erosion that occurs near streams and on surrounding slopes is a natural part of any watershed. Fish and other aquatic organisms in a region are adapted to deal with a range of sediment amounts that enter streams. The amount of erosion in a watershed and the sediment load in the streams vary considerably during the year, with most sediment moving during the few days that have the highest flows. The most significant land-forming events occur during precipitation or snowmelt events that happen only once every decade or more.

Sediment is delivered and transported to stream channels by a variety of processes. Landslide types vary from rapid, shallow debris slides and flows on steep terrain to slow-moving episodic earthflows covering hundreds of acres. Erosion processes include overland flow, concentrating into rills and gullies as well as streambank erosion.

Effects of sediment on stream channels and aquatic habitat are related to the volume, texture, and rate of delivery (see diagram below), as well as the characteristics of receiving stream channels. Fine particles (sand, organics, and silt) deposited on the streambed may blanket spawning gravels and reduce survival of fish eggs incubating in the gravel. Fine sediment may cover the exposed rock surfaces preferred by aquatic insects, reducing the food supply to fish. Suspended sediments cause turbidity (clouding of water), which prevents fish from feeding. Large deposits of coarse sediments can overwhelm the channel capacity, resulting in pool-filling, burial of spawning gravels, and, in some cases, complete burial of the channel, resulting in subsurface streamflows.

Channel Response to Bedload Supply (Lisle USFS)

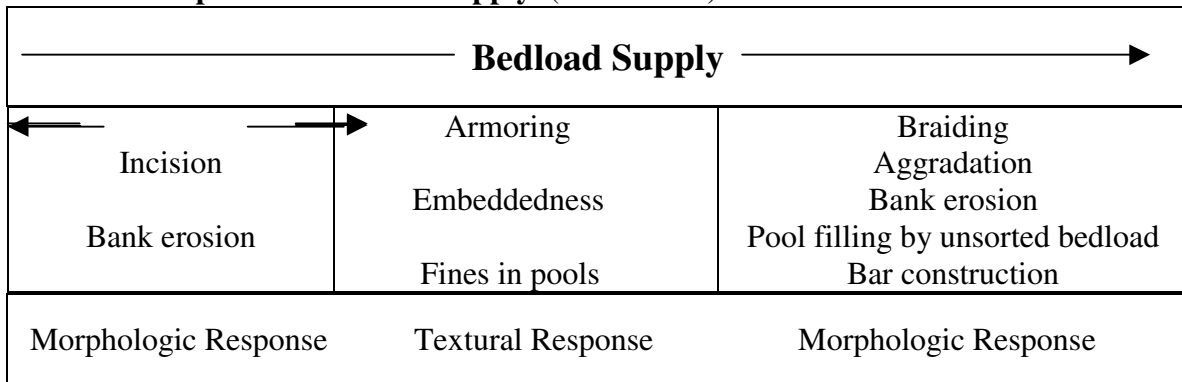

The hardness of the underlying rock and its fracturing as the land is uplifted over long periods of time determine the rate of erosion. These geological processes also influence the pattern and density of streams in a watershed.

In addition to natural levels of erosion, human-induced erosion can occur from roads, landings, rock sources, and other land disturbances. Separating human-induced erosion from natural erosion can be difficult because of the highly variable nature of natural

erosion patterns. Furthermore, human-caused erosion may also be highly variable in timing and spatial pattern. While it is nearly impossible to specify when a human-induced change in sediment is too much for a local population of fish and other aquatic organisms to handle, in general, the greater a stream deviates from its natural sediment levels the greater the chance that the fish and other aquatic organisms are going to be affected. Sediment in streams can have a human dimension, too. High sediment levels can increase the cost of treating drinking water, can be aesthetically displeasing, and can decrease fish angling access.

It is important to recognize that much eroding soil will deposit on a hill slope before it reaches the stream. This is good news, since there are a number of things that can be done to fix a site that is eroding before the sediment enters the streams. For example, water draining from a rutted road surface can be delivered onto a well-drained slope where the sediment will be filtered out, and the clean water can flow beneath the ground's surface to the stream.

Road-Related Erosion

The road network is potentially a significant erosion feature. Improperly placed roads can divert sediment-laden water to streams. Poor drainage of roads can lead to gullying and channeling of the road surface. Improper maintenance of inboard ditches can cause saturation of the roadbed, leading to mass wasting.

Road washouts also can occur when a road adjacent to the stream is undercut and a portion of the road drops into the stream, or at stream crossings during a high flow where there was either an undersized or plugged culvert or bridge. In steeper terrain, road washouts can create shallow landslides on unstable fill or cut-slopes failures. Appropriate sizing of culverts and bridges at stream crossings, locating roads away from streams, designing roads properly, and correctly disposing of soil during road construction on steeper slopes can prevent most road washouts.

B INTRODUCTION

The assessment of sediment within the Sixes River watershed was focused on the results of two analyses that serve as indicators of sediment related concerns. These indicators include an analysis of road density on steep slopes (>50%) and an analysis of road crossing density. Individually, each indicator can help direct land managers toward areas within the watershed that may warrant further investigation. Collectively, however, these indicators identify the relative risks of sediment impacts for each subwatershed throughout private lands in the basin.

The two indicators considered in this assessment (See Tables 24 & 25) focus on roads. They are designed to characterize past and future sediment delivery potential. These indicators represent processes that cause sediment delivery to stream channels, and should be interpreted with stream channel data, such as substrate and pool depth benchmarks used by ODFW. Data on cobble and dominant substrate at pool tail-outs are also available for channels of various gradients measured at several sites throughout

private lands in the watershed. Although natural and harvest-related sediment sources are also present, they offer fewer opportunities for restoration and are therefore not included in this assessment.

Table 24 Roads on Slopes >50% (Indicator I)

<p>Process: Failure of road fills, steep road surfaces and ditches concentrating runoff onto hillslopes.</p>
<p>Comments: Road failures result when road fill becomes saturated and/or incorporated woody debris decays. Prior to changes in the forest practice rules, roads were constructed by excavating and “sidecasting” road fill on slopes greater than 60%. Current practices call for excavating a “full bench” road and end-hauling the material to a stable landing. Although this indicator does not account for the age of the road, most roads were constructed before the change. Roads with well-maintained drainage systems may minimize the erosion, but large storms may move enough sediment to overwhelm the drainages.</p>

Table 25 Road Crossings (Indicator II)

<p>Process: Plugging of culverts, leading to wash-outs or diversions down the road and onto unprotected hillslopes.</p>
<p>Comments: Old forest practice rules required culverts to be sized for storms recurring every 25 years or less. Many of these older culverts cause water to pond during storms, and allow woody debris to rotate sideways and plug the culvert. Culverts that are substantially narrower than the stream channel are also more likely to plug. Crossings located on steeper stream channels are subject to higher stream power mobilizing sediment and wood in the channel, and on hillslopes when diverted. Debris flows are also more likely to be generated on steeper channels. Note: <i>Currently, this indicator has not been refined by considering the stream gradient or the stream junction angle that would factor in the likelihood of continued debris flow run-out. Also, not all culverts that are included in this indicator are likely to plug or fail.</i></p>

Ideally, the sediment indicators could characterize the probability of delivering an estimated volume of sediment with a known range of particle sizes. In reality, we can only infer the processes likely to deliver sediment, and identify locations where the processes are most likely to occur.

C METHODOLOGY

- Roads on Slopes >50%:** USGS 7.5 Minute topographic maps and digital orthophoto quads were interpreted to generate a comprehensive watershed road map in GIS. Old roads were included on the map. Slopes >50% were generated from a slope class map (originally from 10 meter digital elevation models) prepared by the Rogue Valley Council of Governments’ GIS department. The length of all roads with slopes >50% were calculated for each subwatershed.

- **Road Crossings:** USGS 7.5 Minute topographic maps and digital orthophoto quads were interpreted to generate a comprehensive watershed road crossing map in GIS. Crossings were identified at sites where contours or road configuration indicated the presence of distinct channels. (Larger drainage areas are required to create channels on more gentle slopes.) Old roads were included on the map. Crossings on these old roads may already be washed out, or no longer accessible for restoration, but their effects may be reflected in stream channel conditions below.
- For each subwatershed and each indicator a rating of sediment impacts was assigned based on comparisons of all south coast subwatersheds considered in this assessment. A percentile rating of 0-100 was established to represent the relative risk of each indicator for each subwatershed relative where 0 = lowest possible risk and 100 = highest possible risk. The percentile rating was further divided in the following categories: 0-19 (low); 20-39 (moderately-low); 40-59 (moderate); 60-79 (moderately high) and 80-100 (high).

D RESULTS

Table 26 Summary of Sediment Impacts

Subwatershed	Non USFS Acres	Roads on Slopes >50%			Road Crossings		
		Total Road Miles	Density/ Sq Mi	Roads on Slopes >50% Percentile	Total # of Crossings	Density/ Sq Mi	Road Crossings Percentile
Beaver Area	5,218	1.70	0.21	17	43	5.27	24
Big & Otter Area	3,977	3.69	0.59	48	98	15.77	83
Crystal Creek	5,465	0.56	0.07	5	63	7.38	36
Dry Creek	1,750	3.39	1.24	100	38	13.90	72
Edson Creek	6,917	3.31	0.31	25	90	8.33	41
Elephan Rock Area	10,268	6.97	0.43	35	206	12.84	66
Lower Sixes Mainstem	5,819	0.08	0.01	1	26	2.86	10
Middle Fork Sixes	2,709	0.75	0.18	14	44	10.39	53
North Fork Sixes	10,822	1.72	0.10	8	208	12.30	63
South Fork Sixes	1,457	1.45	0.64	51	24	10.54	53
Upper Sixes Mainstem	8,943	3.16	0.23	18	96	6.87	33

E KEY FINDINGS

Density of Roads on Slopes >50%

- Dry Creek received the highest risk rating (100%) of roads on slopes >50% among all south coast subwatersheds considered in this assessment.
- Subwatersheds that received a moderate risk of roads on slopes >50% include South Fork (51%) and Big & Otter Area (48%).
- Moderately low risk ratings were assigned to Elephant Rock Area (35%) and Edson Creek (25%).
- Low risk ratings were assigned to Upper Sixes Mainstem (18%), Beaver Area (17%), Middle Fork (14%), North Fork (8%), Crystal Creek (5%) and Lower Sixes Mainstem (1%).

Density of Road Crossings

- The only subwatershed with a high risk rating associated with road crossing density is Big & Otter Area (83%).
- Moderately high risk ratings were assigned to Dry Creek (72%), Elephant Rock Area (66%), and the North Fork (63%).
- Moderate risk ratings were assigned to the Middle Fork (53%), South Fork (53%), and Edson Creek (41%).
- Moderately low risk ratings were assigned to Crystal Creek (36%), Upper Sixes Mainstem (33%), and Beaver Area (24%).
- The only subwatershed with a low risk rating associated with road crossing density is the Lower Sixes Mainstem (10%).

F OTHER

Although not available at this time, an analysis of roads within 100 feet of stream channels will serve as a third indicator in the near future. Data, produced by the Rogue Basin Restoration Technical Team, should be available in the near future.

Roads Within 100 feet of Stream Channels (Indicator III)

<p>Process: Ditch erosion delivered directly to streams at crossings and at ditch relief culverts (less opportunity for fines to deposit on slopes), fill failures more frequent in wet toe-slope position and more likely to deliver to channels. Removal of large wood from channels.</p>
--


<p>Comments: The amount of fines generated from the road surface and ditch is related to the traffic and season (e.g. wet weather haul), frequency of disturbance including grading, and quality of the surfacing on the road. These factors however are not taken into account by this indicator.</p>

REFERENCES


GWEB 1999. Oregon Watershed Assessment Manual. Governor's Watershed Enhancement Board, July 1999

Lisle USFS. Tom Lisle, USFS, Redwood Sciences Laboratory, Arcata, California

Sixes River Percentile Range for Density of Road Crossings

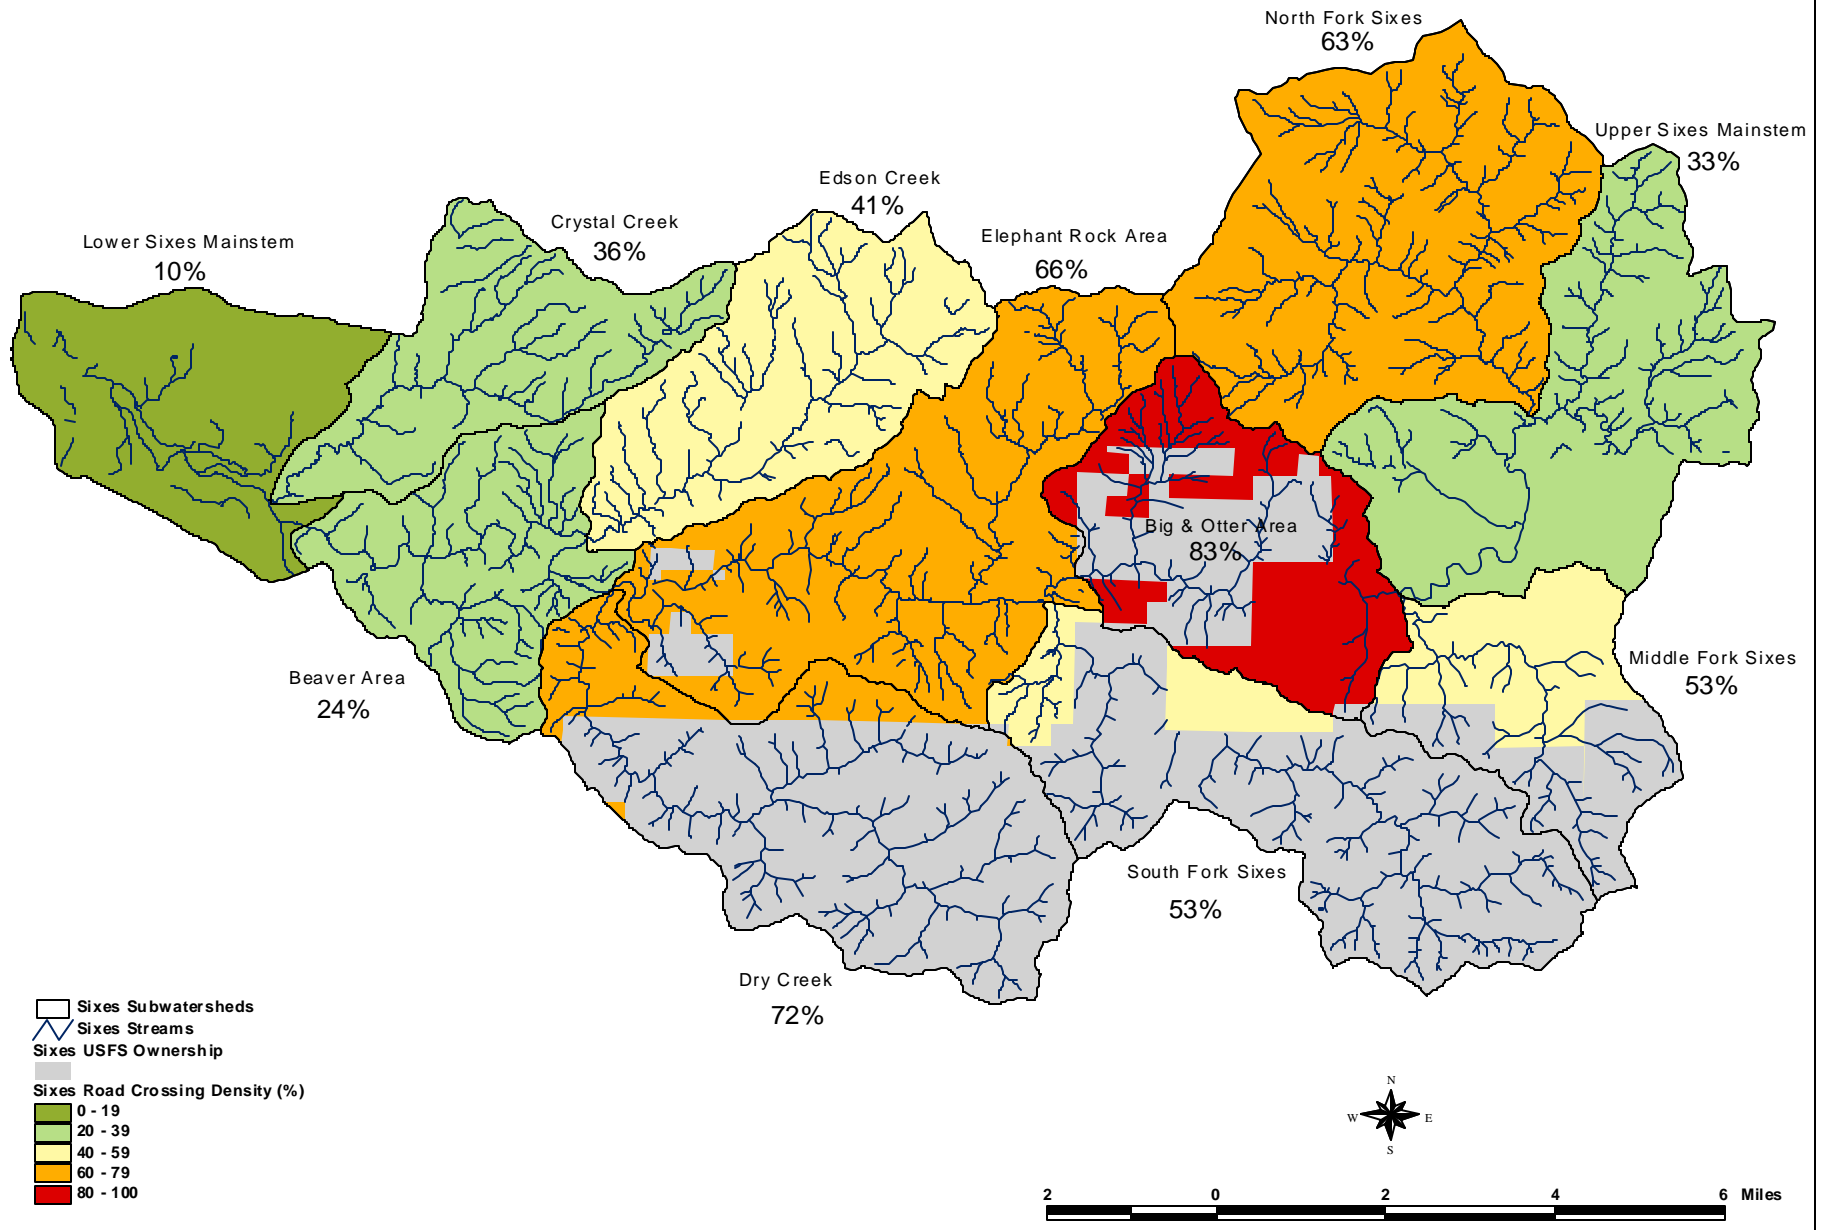

Sixes River Percentile Range for Density of Roads on Slopes >50%

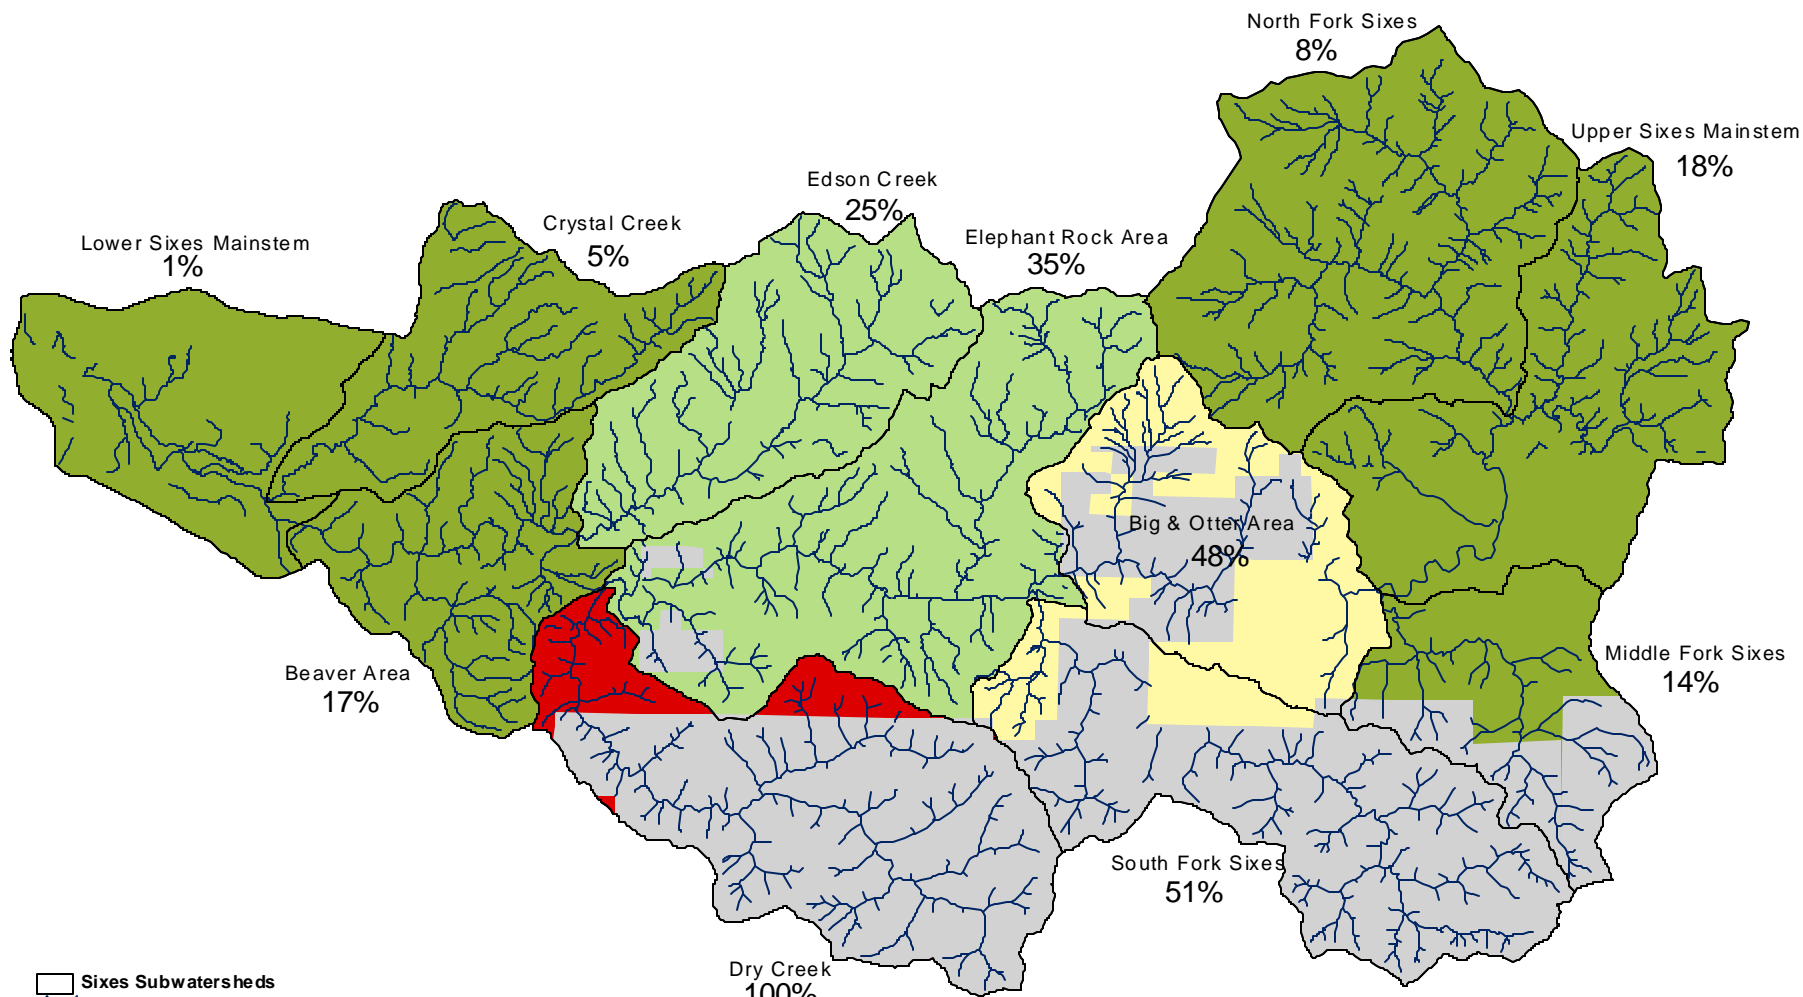

Sixes Subwatersheds

 Sixes Streams

 Sixes USFS Ownership

Sixes Steep Road Density (%)


 0 - 19

 20 - 39

 40 - 59

 60 - 79

 80 - 100



VIII WETLANDS

A BACKGROUND (GWEB 1999 and OSU 1998)

Wetlands are often considered ecological “hot spots.” They play a role disproportionate to their size in supporting endangered species and maintaining biodiversity. When considering wetland assessments and associated restoration projects it seems prudent to first understand a regulatory definition of a wetland as used by the U.S. Army Corps of Engineers and the Oregon Division of State Lands: **Wetlands are those areas that are inundated or saturated by surface or groundwater at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted to life in saturated soil conditions.**

Wetlands provide a variety of important functions, including water quality improvement, flood attenuation and desynchronization, groundwater recharge and discharge, and fish and wildlife habitat. These functions are described below.

Water Quality Improvement

Wetlands aid in water quality improvement by trapping sediment, and contaminants that may be attached to these sediments. Dense wetland vegetation tends to slow the rate of movement of water, which allows sediments to settle out. Although deposition of sediments is beneficial to downstream resources, excessive sedimentation may have negative impacts on the wetland itself. When a wetland is subjected to ongoing sediment deposition, the bottom elevation of the wetland will change; over time, this will lead to wetland loss. This process is exacerbated by human induced factors that increase sedimentation.

Vegetation within wetlands also can assimilate certain nutrients and some toxins, thereby protecting downstream resources. The anaerobic environment of many wetland soils breaks down nitrogen compounds and keeps many compounds in a nonreactive form. The ability of a wetland to provide this function is limited: At a certain point, toxins can build up to lethal levels in the wetland community and decrease the wetlands capacity to metabolize the nutrients entering from upstream sources. In addition, plant die-back and decay can re-release nutrients or toxins back into the system, although many toxins are actually converted to less harmful forms or bound in sediments.

Flood Attenuation and Desynchronization

Wetlands can help alleviate downstream flooding by storing, intercepting, or delaying surface runoff. Wetlands within the floodplain of a river can hold water that has overtopped river-banks. Floodwater desynchronization occurs when wetlands higher in the watershed temporarily store water, reducing peak flows. The most effective wetlands at providing desynchronization are generally located in the middle elevations of the watershed; these wetland locations are far enough away from the receiving water to create delay, but are low enough in the watershed to collect significant amounts of water.

Groundwater Recharge and Discharge

Wetlands are intimately associated with groundwater, and some wetlands can function to recharge underlying aquifers. Wetlands are sources of groundwater discharge that may help extend streamflows into the drier summer months. In eastern Oregon, restoring wet meadows in stream headwaters has extended the seasonal duration of streamflow.

Fish and Wildlife Habitat

Wetlands provide habitat and food for a variety of aquatic and terrestrial plant and animal species. Many species rely on wetlands for all or a portion of their life cycle. In addition to directly providing habitat, wetlands can directly support fish through some of the functions, discussed previously, that protect water quality and channel stability. Estuarine wetlands provide important feeding and holding areas for out-migrating salmon smolts.

B INTRODUCTION (GWEB 1999 and OSU 1998)

Wetlands are protected by federal, state, and local regulations. In order to plan for growth and development in a watershed, it is necessary to know where these resources are located. In addition, wetlands can contribute to critical functions in the health of a watershed as mentioned above. Determining the approximate location and extent of wetlands may be essential in solving problems within the watershed.

Purpose

The purpose of the wetland characterization is to gain specific information on the location and attributes of wetlands in the watershed, including size, habitat type, surrounding land use, connectivity, and opportunities for restoration. This process will also assist in determining the relationship between wetlands and problems in the watershed that are identified through other components in this assessment. In addition, this inventory will help watershed councils determine whether it is appropriate or necessary to collect additional data on wetland function.

National Wetlands Inventory and the Cowardin Classification System

The most widely available and comprehensive wetlands information in the United States is the U.S. Fish and Wildlife Service's National Wetlands Inventory (NWI). The NWI has located and classified wetlands as well as mapped the entire aquatic ecosystem network. NWI maps contain information on location in the watershed, water regime, vegetation class or subclass, morphology, and sheet versus channel flow. The NWI is based on the Cowardin Classification System, which was published as the *Classification for Wetland and Deepwater Habitats of the United States*. It has four objectives:

1. To describe ecological units whose natural attributes are fairly homogenous
2. To arrange these units in a system that will help people make decisions about resource management
3. To provide information for inventory and mapping
4. To create standard concepts and terminology for use in classifying aquatic ecosystems

A major weakness of the Cowardin system and the NWI is that the descriptions of mapped units often don't relate consistently to ecosystem functions. Because of the system's reliance on plant types as identifying criteria, wetlands that function very differently often are grouped into the same Cowardin class simply because they have the same vegetation.

Cowardin Classification's five major systems:

1. Marine (ocean): Consists of the open ocean overlying the continental shelf and its associated high-energy coastline. Marine habitats are exposed to the waves and currents of the open ocean and the water regimes are determined primarily by the ebb and flow of oceanic tides.
2. Estuarine (estuaries): Deepwater tidal habitats and adjacent tidal wetlands that are semi-enclosed by lands but have open, partially obstructed, or sporadic access to the open ocean, and in which open water is at least occasionally diluted by freshwater runoff from the land.
3. Riverine (rivers): Includes all wetlands and deepwater habitats contained within a channel, except: (1) wetlands dominated by trees, shrubs, persistent emergents, emergent mosses, or lichens, and (2) areas with water containing ocean-derived salts in excess of 0.5 parts per thousand.
4. Lacustrine (lakes): Includes wetlands and deepwater habitats with all of the following characteristics: (1) situated in a topographic depression or a dammed river channel; (2) lacking trees, shrubs, persistent emergents, mosses, or lichens with greater than 30% areal coverage; and (3) total area exceeds 8 hectares (20 acres).
5. Palustrine (marshes): Includes all nontidal wetlands dominated by trees, shrubs, persistent emergents, emergent mosses, or lichens, and all such wetlands that occur in tidal areas where salinity due to ocean-derived salts is below 0.5 parts per thousand.

These systems are divided into subsystems, which reflect water flow regimes (subtidal, intertidal, etc.). The subsystems are then divided into many different classes, which reflect structural vegetative characteristics (e.g. RB Rock Bottom, UB Unconsolidated Bottom, etc.). The classification of a mapped wetland is coded by a series of letters and numbers. The first letter of the code represents the system, the subsequent number represents the subsystem and the next two letters indicate the class. All Cowardin codes have more than three letters and/or numbers. These additional characters represent more specific information about each wetland. Generally, however, the first three letters and numbers of each code are the most important for the purpose of this assessment. A summary of the Cowardin Classification Codes is provided below. These codes will be helpful in identifying restoration opportunities within the Sixes River watershed.

Due to the common occurrence of Palustrine wetlands, specific descriptions of five common classes are provided as follows:

1. EM Emergent: Dominated by rooted herbaceous plants, such as cattails and grass.
2. FO Forested: Dominated by trees taller than 20 feet.
3. OW Open Water: No vegetation evident at the water surface.
4. SS Scrub-Shrub: Dominated by shrubs and saplings less than 20 feet tall.
5. UB Unconsolidated Bottom: Mud or exposed soils.

Summary of Cowardin Classification Codes

System	Subsystem	Class	
M= Marine	1 = Subtidal	<u>RB</u> Rock Bottom <u>UB</u> Unconsolidated Bottom <u>AB</u> Aquatic Bed	<u>RF</u> Reef <u>OW</u> Open Water/Unknown Bottom
	2 = Intertidal	<u>AB</u> Aquatic Bed <u>RF</u> Reef	<u>RS</u> Rocky Shore <u>US</u> Unconsolidated Shore
E= Estuarine	1 = Subtidal	<u>RB</u> Rock Bottom <u>UB</u> Unconsolidated Bottom <u>AB</u> Aquatic Bed	<u>RF</u> Reef <u>OW</u> Open Water/Unknown Bottom
	2 = Intertidal	<u>AB</u> Aquatic Bed <u>RF</u> Reef <u>SB</u> Streambed <u>RS</u> Rocky Shore	<u>US</u> Unconsolidated Shore <u>EM</u> Emergent Wetland <u>SS</u> Scrub/Shrub Wetland <u>FO</u> Forested Wetland
R= Riverine	1 = Tidal	<u>RB</u> Rock Bottom <u>UB</u> Unconsolidated Bottom <u>AB</u> Aquatic Bed <u>SB</u> Streambed	<u>RS</u> Rocky Shore <u>US</u> Unconsolidated Shore <u>EM</u> Emergent Wetland <u>OW</u> Open Water/Unknown Bottom
	2 = Lower Perennial	<u>RB</u> Rock Bottom <u>UB</u> Unconsolidated Bottom <u>AB</u> Aquatic Bed <u>RS</u> Rocky Shore	<u>US</u> Unconsolidated Shore <u>EM</u> Emergent Wetland <u>OW</u> Open Water/Unknown Bottom
	3= Upper Perennial	<u>RB</u> Rock Bottom <u>UB</u> Unconsolidated Bottom <u>AB</u> Aquatic Bed	<u>RS</u> Rocky Shore <u>US</u> Unconsolidated Shore <u>OW</u> Open Water/Unknown Bottom
	4 = Intermittent	<u>SB</u> Streambed	
L= Lacustrine	1 = Limnetic	<u>RB</u> Rock Bottom <u>UB</u> Unconsolidated Bottom	<u>AB</u> Aquatic Bed <u>OW</u> Open Water/Unknown Bottom
	2 = Littoral	<u>RB</u> Rock Bottom <u>UB</u> Unconsolidated Bottom <u>AB</u> Aquatic Bed <u>RS</u> Rocky Shore	<u>US</u> Unconsolidated Shore <u>EM</u> Emergent Wetland <u>OW</u> Open Water/Unknown Bottom
<u>P</u> - Palustrine		<u>RB</u> Rock Bottom <u>UB</u> Unconsolidated Bottom <u>AB</u> Aquatic Bed <u>US</u> Unconsolidated Shore <u>ML</u> Moss-Lichen Wetland	<u>EM</u> Emergent Wetland <u>SS</u> Scrub/Shrub Wetland <u>FO</u> Forested Wetland <u>OW</u> Open Water/Unknown Bottom

Source: Cowardin, L.M., V. Carter, F.C. Golet, and E.T. LaRoe. 1979. Classification of Wetlands and Deepwater Habitats of the United States. US Fish and Wildlife Service, FWS/OBS-79-31, Washington DC.

C METHODOLOGY

1. NWI Maps: NWI maps (scale 1:24,000) were obtained for the majority of private lands within the Sixes River watershed. These maps were utilized as the base maps for identifying wetlands within the watershed. Wetlands considered in this assessment were labeled on corresponding NWI maps.
2. Wetland ID: Wetland IDs were determined by lumping or splitting individual Cowardin units. The lumping/splitting process was performed on the basis of vegetative and hydrologic similarities, land usage, buffer classification, and restoration potential of adjoining Cowardin units. A Wetland ID (1, 2, 3, etc.) was assigned to each group and labeled on the NWI map. Cowardin Classification Codes characteristic of each wetland were listed in Table 27. (Several Wetland IDs consist of more than one code.) Wetlands beginning with the letter “R” (riverine) were not considered due to the very complex NWI mapping that can occur near stream channels.
3. Color Code: Each Wetland ID was color-coded on the NWI maps to assist in locating a wetland listed on Table 27.
4. Size: The size of each wetland was estimated using a mylar template. The minimum size of a wetland assessed was approximately 1.5 acres. **Note**: A slight margin of error in size estimation was possible.
5. Connectivity: Surface-water connection between each wetland and stream was estimated. A wetland was considered connected if some part had a surface-water connection to a seasonal or perennial surface-water-body, including natural and man-made channels, lakes, or ponds. For terraces alongside major channels that are routinely flooded, the presence of a well-defined channel or depression that lacked vegetation but may potentially lead to a channel constituted a surface-water connection. Similarly, ditched pasture-land also qualified as connected.
6. Subwatersheds: Subwatersheds were identified for each wetland.
7. Buffer: Using aerial photographs, the dominant land use within 500 feet of a wetland’s edge was characterized using the following codes: FO = forest or open space, AG = agriculture (pasture, crops, orchards, range land), R = rural (mix of small-scale agriculture, forest, and/or rural residential), or D = developed (residential, commercial, industrial). Where more than one land use exists, the dominant (>50% of the area) was listed.
8. Watershed Position: Using the USGS topographic maps, the watershed was divided into thirds to determine the general location of each wetland within the basin. The position of a wetland was characterized as highest, middle or lowest in position. Elevation changes were considered in determining the watershed position.
9. Degree of Alteration: A degree of alteration (Low, Moderate or High) was assigned to each wetland on the basis of past impacts. Examples of these alterations/impacts include clearing, grading, filling, ditching/drainage or diking in or near a wetland.
10. Field Verification: Suggests need to verify information, particularly to determine whether a surface water connection exists or not.
11. Comments: Comments were primarily focused on describing the status of the existing use of the wetland (i.e. drained, converted, quality of pasture). These

descriptions should be considered when determining the “likelihood” of restoration potential.

12. Other: Aerial photographs (1997 BLM) were used to assist in determining each wetland’s connectivity to stream channel, adjacent land use, and ultimately for the determination of restoration potential and comments portions of the assessment.

D RESULTS

Table 27 Sixes River Wetland Attributes

E KEY FINDINGS

- An estimated 1,372.5 acres of wetlands were assessed in the Sixes River Watershed. This acreage was divided into 44 *Wetland ID*’s; each of which is comprised of one or more NWI delineated wetlands.
- The degree to which the assessed wetlands have been altered is as follows: low, 30%; low-moderate, 3%; moderate, 22%; moderate-high, 36%; and high, 9%. *Percentages are based on total acres.*
- Three of wetlands have high restoration potential.
- The wetland buffers are as follows: forest/open, 49%; agriculture, 44%; rural, 5%; and developed, 1%. *Percentages are based on total acres.*
- Wetland connectivity to other waterbodies is as follows: connected, 43%; partially connected, 16%; not connected, 30%; and unknown, 11%. *Percentages are based on total acres.*
- The wetlands occur in the subwatersheds as follows: Lower Sixes Mainstem, 91%; Crystal Creek, 7%; and Beaver Area, 2%. *Percentages are based on total acres.*
- All wetlands considered in this assessment were located in the lowest watershed position. *See Methodology for explanation of watershed position.*
- Five wetlands need a field visit to confirm/clarify the information.

F DISCUSSION

The GWEB Oregon Watershed Assessment Manual defines the “Restoration Potential” of a wetland based on its degree of alteration. This implies that a wetland considered to have a low degree of alteration, such as a properly functioning wetland, should be rated as low restoration potential. In contrast, a wetland considered to have a high degree of alteration, such as one currently managed for pasture, should be rated as high restoration potential. Although this method is a true characterization of a typical wetland it can be quite misleading because it overlooks certain socioeconomic factors. Often, the most altered wetlands are those that currently serve as prime agricultural lands and, in many cases, may realistically offer only low restoration opportunities. Therefore, the term “Restoration Potential” has been exchanged for a more accurate term – “Degree of Alteration”.

The actual restoration of a wetland should be based on many considerations including opportunities to protect properly functioning wetlands and enhance marginal wetlands as well as the landowner's willingness to convert a pasture back to a wetland. Ensuring adequate protection for a properly functioning wetland will typically prove more cost effective than restoration of a non-functional wetland. However, in some cases, the physical and biological benefits associated with restoring a wetland may merit significant costs.

REFERENCES

GWEB 1999. Oregon Watershed Assessment Manual. Governor's Watershed Enhancement Board, July 1999

OSU 1998. Watershed Stewardship - A Learning Guide, Oregon State University Extension Service, July 1998

IX HYDROLOGY

A BACKGROUND (GWEB 1999)

Hydrologic Cycle

The hydrologic cycle describes the circulation of water around the earth, from ocean to atmosphere to the earth's surface and back to the ocean again. Oceans, covering 70% of the earth's surface, play a large role in the movement of water through this cycle. Solar energy evaporates water from the ocean, wind carries the water over the land surface, and water is precipitated by gravity back to the earth. Rain is the most common form of precipitation, but snow, hail, dew, fog, drip, and frost all can bring water into a watershed. Precipitation that reaches the earth can move through three different pathways. Water can:

- Be intercepted by vegetation and evaporated or transpired back to the atmosphere
- Move down-slope on the surface or through soil to a stream system, eventually returning to the ocean
- Be stored in snowpack, groundwater, ponds, or wetlands for a variable period of time

Land Use Impacts on Hydrology

Land use practices can modify the amount of water available for runoff, the routing of water to the streams, the lag time (delay between rainfall and peak streamflow), the flow velocity, or the travel distance to the stream. Land use practices that affect the rate of infiltration and / or the ability of the soil surface to store water are typically most influential in affecting the watershed's hydrology. Using this as an indicator for comparison among the land uses, forest harvesting produces the smallest change in the infiltration rate, thereby producing the smallest impacts to the hydrologic regime of a basin. Forest harvest practices have evolved such that land compaction can be minimized; however, roads and grazing in these watersheds decrease the infiltration rate. In contrast to forest harvest, agricultural practices, rangeland utilization for grazing purposes, and urban development can all involve compaction of the soils and / or paved surfaces, resulting in substantial alteration of the infiltration rate. Agricultural practices and urban development directly involve altering the shape of the drainage system by ditching, channelizing, or using piped stormwater networks which decrease the infiltration and the travel time of subsurface flow to reach the channel. This effect can be much worse in high-flow conditions. While forest harvest practices are not always practiced at sustainable rates, they are temporary conversions of vegetation, and the hydrologic effects diminish as vegetative regrowth occurs. Conversion of lands to agriculture or urbanization produces generally longer-lasting effects. Road construction, associated with all land uses, alters the rate of infiltration on the road surface and replaces subsurface flow pathways with surface pathways resulting in quicker travel time to the channel network.

B INTRODUCTION

The Hydrologic Condition Assessment is a “screening” process designed to identify land use activities that have the potential to impact the hydrology of the Sixes River watershed. Alterations to the natural hydrologic cycle potentially cause increased peak flows and/or reduced low flows resulting in changes to water quality and aquatic ecosystems. The degree to which hydrologic processes are affected by land use depends on the location, extent, and type of land use activities. When potential impacts are recognized, best management practices can be followed to minimize some of the potential hydrologic impacts; mitigation will be necessary to address other impacts.

The GWEB Oregon Watershed Assessment Manual provides a set of methods to prioritize those subwatersheds most likely to need restoration from a hydrologic perspective. Because hydrology is such a complex subject, the screening process only deals with the most significant hydrologic process affected by land use (i.e., runoff). The assessment does not attempt to address every hydrologic process potentially affected; the goal is to gain an understanding of the major potential impacts.

General Watershed Characteristics

A Geographic Information System (GIS) analysis was conducted to provide general watershed characteristics pertaining to the Hydrologic Condition Assessment of Sixes River. The GIS shapefile used in this portion of the assessment is titled “Precipitation, Average Annual”, available from the Southwest Oregon Province GIS Data CD. Minimum elevations, maximum elevations and maximum elevation locations were determined using USGS 7.5 Minute Quads.

Table 28 General Watershed Characteristics

Subwatershed Name	Subwatershed Area (square miles)	Mean Annual Precipitation (inches)	Minimum Elevation (feet)	Maximum Elevation (feet)	Maximum Elevation (Location)
Beaver Area	8.2	97	40	1,360	Non Name
Big & Otter Area	10.7	91	200	2,680	Mt. Avery
Crystal Creek	8.5	97	40	2,536	Grouslous Mtn.
Dry Creek	16.0	121	80	2,608	No Name
Edson Creek	10.8	110	80	2,720	Edson Butte
Elephant Rock Area	16.9	97	80	2,320	near Double Prairie
Lower Sixes Mainstem	9.1	80	0	816	Madden Butte
Middle Fork Sixes	7.7	93	360	3,315	No Name
North Fork Sixes	16.9	86	400	2,550	Sugarloaf Mtn.
South Fork Sixes	15.1	110	160	3,067	Non Name
Upper Sixes Mainstem	14.0	80	160	2,550	Sugarloaf Mtn.
Totals	133.9				

Note: The upper third of the watershed is in the rain-shadow of Edson Butte. This area receives only 65-95” of annual precipitation compared to 110-130” for middle third of basin.

Land Use Summary

A GIS analysis was conducted to determine land use using two shapefiles titled “Sixes River Subwatersheds”, available from the South Coast Watershed Council, and “Vegetation”, available from the Southwest Oregon Province GIS Data CD. This data was used to characterize land use by lumping several vegetation types into two categories: (1) Forestry and (2) Agriculture/Range and Rural Residential.

Table 29 Subwatershed Land Use Summary

Subwatershed	Forestry		Agriculture/ Range & Rural Residential		Total Acres
	Acres	%	Acres	%	
Beaver Area	4,258	81.6	848	16.3	5,218
Big & Otter Area	6,842	100.0	0	0.0	6,842
Crystal Creek	4,614	84.4	852	15.6	5,466
Dry Creek	10,016	97.9	208	2.0	10,226
Edson Creek	6,627	95.8	292	4.2	6,919
Elephant Rock Area	10,648	98.5	82	0.8	10,811
Lower Sixes Mainstem	2,686	46.0	2,948	50.5	5,837
Middle Fork Sixes	4,938	100.0	0	0.0	4,938
North Fork Sixes	10,751	99.4	69	0.6	10,820
South Fork Sixes	9,640	100.0	0	0.0	9,640
Upper Sixes Mainstem	8,265	92.4	678	7.6	8,943
Total Acres % Percents	79,285	92.6	5,977	7.0	85,660

Individual Screening Procedures

Three separate screening procedures were developed to evaluate land use impacts on hydrology in the Sixes River watershed:

- C FORESTRY**
- D AGRICULTURE/RANGELANDS**
- E FOREST AND RURAL ROADS**

C1 FORESTRY IMPACTS ON HYDROLOGY

The potential effects of forest practices on hydrology include changes in peak flows, water yield, and low flows. There are two primary mechanisms by which forest practices in the Pacific Northwest watersheds impact hydrologic processes: (1) the removal and disturbance of vegetation, and (2) the road network and related harvesting systems.

Removal of vegetation reduces interception and evapotranspiration, both of which allow additional water to reach the soil surface during rainstorms. Additionally, open areas accumulate more snowpack which can potentially produce an increase in water yield. Forestry-related effects on peak flows may be a function not only of harvest and vegetative cover issues, but also of the type of hydrologic process that occurs in a basin. Increased peak flows, associated with rain on snow events present the greatest likelihood of problems caused by timber harvest. While rain on snow conditions can occur at almost any elevation, given a specific combination of climatic variables, the probability of rain-on-snow enhancement of peak flows differs with elevation and, to a lesser degree, aspect. The highest probability of encountering rain-on-snow conditions occurs at mid-elevations where transient snowpacks develop but not at great depths. The lowest probability occurs in the lowlands, where snowpack rarely occurs and, at the higher elevations, where winter temperatures are too cold to melt snow. The elevation of the lower boundary of the rain-on-snow zone will vary geographically and often by ecoregion.

C2 METHODOLOGY

1. The screen for potential forestry impacts on hydrology was focused on timber harvest. A GIS analysis was conducted to determine total area of transient snow elevation zones by subwatershed. The GIS shapefile used in this portion of the assessment is titled "Transient Snow Elevation Zones", available from the Southwest Oregon Province GIS Data CD.
2. Peak flow generating processes were identified for each subwatershed and characterized as rain or rain-on-snow. Peak flow generating processes within elevation zones of 0' to 2,500' are characterized as rain. In the relatively high elevations snow accumulations are considered transient; snow levels may fluctuate daily, weekly or monthly throughout the winter season. The peak flow generating process in these higher elevations (>2,500') is characterized primarily as rain on snow. However, only occasional storms result in peak flows generated by rain-on-snow conditions (Weinhold USFS).

C3 RESULTS

Table 30 Transient Snow Elevation Zones and Peak Flow Generating Processes

Subwatershed	Area (acres)	Rain Zone		Rain on Snow Zone		Rain on Snow Zone	
		0'-2500' (acres)	% Area	2500'-3000' (acres)	% Area	3000'-3500' (acres)	% Area
Beaver Area	5,218	5,218	100.0	0	0.0	0	0.0
Big & Otter Area	6,846	6,836	99.9	10	0.1	0	0.0
Crystal Creek	5,464	5,463	100.0	1	0.0	0	0.0
Dry Creek	10,226	10,226	100.0	0	0.0	0	0.0
Edson Creek	6,919	6,884	99.5	35	0.5	0	0.0
Elephant Rock Area	10,812	10,812	100.0	0	0.0	0	0.0
Lower Sixes Mainstem	5,842	5,842	100.0	0	0.0	0	0.0
Middle Fork Sixes	4,940	4,742	96.0	186	3.8	12	0.2
North Fork Sixes	10,821	10,820	100.0	1	0.0	0	0.0
South Fork Sixes	9,639	9,468	98.2	166	1.7	5	0.1
Upper Sixes Mainstem	8,943	8,943	100.0	0	0.0	0	0.0
Total Acres	85,670	85,254	99.5	399	0.5	17	0.0

C4 KEY FINDINGS

- Over 90% of the Sixes River watershed is in forestry use.
- Results indicate that over 99% of the Sixes River watershed is located within the lowest elevation zone of 0' to 2,500'. Peak flow generating processes in this elevation zone are rain dominant. Elevation zones of the remaining area (<1%) of the watershed are located in rain on snow zones between 2,500' and 3,500'.
- The GWEB Oregon Watershed Assessment Manual suggests characterizing subwatersheds with more than 75% in the rain category as low potential risk of peak flow enhancement. Since all subwatersheds fall within the rain category a low potential risk of peak flow enhancement was assigned throughout the entire basin.
- Further analysis of forestry and surface runoff effects should be conducted on those subwatersheds where >50% of the hydrologic soil groups are in classes C and D.

C5 DISCUSSION (Stewart 2001)

Peak flows and low flows are the hydrologic processes most significantly impacted by land use activities. By removing more than 30% of a forested landscape the amount and timing of runoff can be altered. This concept is more evident in small local drainages, where some important spawning and rearing of salmonids occur, than at the mouth of a main river.

In addition to land use impacts that cause increased flows from timber harvest, the reduced infiltration capacity of the soil is also a concern. Impervious surfaces and roads

are good indicators of urbanization and subsequent impacts to the hydrology of a watershed. However, this is only part of the problem. One needs to determine the percent of land surface compacted during forest harvest. Most literature cites 12% of land in a compacted state to be capable of increasing surface runoff. Many of the south coast watersheds were logged with ground based equipment or cable systems known for poor suspension of logs (Hi-Lead). These harvest systems could have compacted 20-40% of the land surface to a point where infiltration would be impaired and runoff increased.

Compounding the area of harvest and impacts to infiltration from the harvest method, the natural state of the soil in some portions of the watershed is very poor. Hydrologic Soil Group (HSG) ratings C and D have minimum infiltration rates of 1-4 and 0-1 mm/hr. respectively. Converting 0.1 inches of rain/hr. to mm/hr. equals 2.54 mm/hr. One-quarter (0.25) inch of rain/hr. exceeds the infiltration capacity of HSG-C by about 50% and HSG-D by over 600%. Given that these soil groups also correspond with areas of high precipitation the runoff effects are naturally high. Harvest removal and compaction further increase this effect.

Further analysis is warranted to look at the level of timber harvest within the watershed. Simply stating that forested areas within rain-dominated areas have a low risk of increasing peak flows is simply untrue. Past practices may still be impacting the routing of water and causing channel modifications or increased sediment routing/turbidity conditions. This would be detrimental to fish habitat and/or fish populations. One suggestion is to obtain and interpret historical photos of the watershed. When viewed on a large scale, specific areas of impact may stand out and provide some indication of historical levels of compaction and timber harvest.

D1 AGRICULTURAL & RANGELAND IMPACTS ON HYDROLOGY


Agricultural practices have most often been implemented along valley bottoms, floodplains, and other adjacent low-gradient lands. An often long-lasting change in the vegetative cover occurs from the conversion of the landscape from forested woodlands, prairie grasslands, or other natural environs, to agricultural use. Clearing for pasture or crop production has also entailed land-leveling or topographic changes of the landscape. Leveling and field drainage has resulted in the elimination of many wetlands and depressions that previously moderated flood peaks by providing temporary storage. Without wetlands and depressions, surface and subsurface runoff move more quickly to the channel network.

Common channel modifications such as ditches, constructed to drain land, and channel straightening were created to maximize agricultural land use. These practices result in increased velocities of surface and subsurface flows that correspondingly decrease infiltration opportunities. Decreased infiltration produces increased runoff and subsequent decreased baseflows during the low-flow season.

The impact of agriculture on hydrology is dependent on specific practices such as the type of cover and management treatments, as well as the characteristics of the soil being farmed. Practices that change infiltration rates are most likely to change the hydrologic regime. The infiltration rates of undisturbed soils vary widely. Agriculture has a greater effect on runoff in areas where soils have a high infiltration rate compared to areas where soils are relatively impermeable in their natural state (USDA 1986).

The Natural Resources Conservation Service (NRCS) has characterized and mapped the soils throughout the state. As part of the mapping process, soils are classified into one of four hydrologic soil groups primarily as a function of their minimum infiltration rate on wetted bare soil. As part of the NRCS methods (USDA 1986), runoff curve numbers are assigned to areas for each of the combination of three parameters: (1) soil group, (2) cover type, and (3) treatment or farming practice.

NRCS Hydrologic Soil Group Classification (USDA 1986)

Low Runoff Potential	Hydrologic Soil Group	Soil Characteristics	Minimum Infiltration Rate (mm/hr)
	A	High infiltration rates even when thoroughly wetted. Deep, well-drained sands or gravels with a high rate of water transmission. Sand, loamy sand, or sandy loam.	8 – 12
	B	Moderate infiltration rates when thoroughly wetted. Moderately deep to deep, moderately well-drained to well-drained, moderately fine to moderately coarse textures. Silt loam or loam.	4 – 8
	C	Slow infiltration rate when thoroughly wetted. Usually has a layer that impedes downward movement of water or has moderately fine to fine textured soils. Sand clay loam.	1 – 4
	D	Very low infiltration rate when thoroughly wetted. Chiefly clay soils with a high swelling potential; soils with a high permanent water table; soils with a clay layer near the surface; shallow soils over near-impervious materials. Clay loam, silty clay loam, sandy clay, silty clay, or clay.	0 – 1
High Runoff Potential			

Runoff curve numbers are used as part of a simplified procedure for estimating runoff in small agricultural and urban watersheds (USDA 1986). Curve numbers are assigned based on factors such as soils, plant cover, and impervious area. Rainfall is converted to runoff using Curve numbers.

Certain soil conditions can make farming difficult, so amending the soil structure by adding organic matter becomes a way in which farmers can maximize the use of their land. This practice can actually change the hydrologic soil group from, say, a C to a B. In this example, it is possible to reduce the runoff rather than increase it. To detect these changes at this screening level of assessments will be difficult. Voluntary actions and implementation of best management practices to improve soil texture and water holding capacity can be a benefit to the farmer as well as to the hydrology of the watershed.

Grazing animals impact rangelands in two ways: (1) removal of protective plant material, and (2) compaction of the soil surface. Both of these actions affect the infiltration rate (Branson et al. 1981). Cattle grazing on sparsely forested lands can have similar impacts and should be considered under this heading. In general, moderate or light grazing reduces the infiltration capacity to 75% of the ungrazed condition and heavy grazing reduces the infiltration by 50% (Gifford and Hawkins 1979). Soil compaction, which decreases the infiltration rate, correspondingly increases the overland flow or surface runoff.

Impacts associated with the use of range lands can be assessed in a similar manner as agricultural lands. There is no statistical distinction between the impact of light and moderate grazing intensities on infiltration rates. Therefore, they may be combined for purposes of assessment. (Gifford and Hawkins 1979).

D2 METHODOLOGY

Table 31 (See Below)

1. Using a GIS shapefile titled “Soils” (SWOP CD), hydrologic soil groups were identified in agricultural and rangeland areas in each subwatershed.
2. Using two GIS shapefiles titled “Sixes River Subwatersheds”, available from the South Coast Watershed Council, and “Soils”, available from the Southwest Oregon Province GIS Data CD, hydrologic soil groups (HSGs) were identified in agricultural and rangeland areas for each subwatershed.
3. Cover types and treatment practices were identified for the primary hydrologic soil groups of each subwatershed. Cover types and treatment practices were also identified for secondary hydrologic soil groups where each HSG accounted for 20% or more of the subwatershed area. **Caution:** Due to the limitations of the available GIS data, no distinction was made between agricultural, rangeland or rural residential areas.

Table 32 (See Appendix)

4. Hydrologic condition classes of good, fair, or poor were determined for each cover type/treatment practice by referring to Table 33 (See Appendix). Hydrologic condition of “Good” was assigned to all HSGs in all subwatersheds based on the criteria of >75% ground cover and lightly or only occasionally grazed.
5. A curve number was selected based on the cover type/treatment practice and hydrologic condition in columns 3 and 4 of Table 32. The selected curve number was then entered in column 5 of Table 32.
6. Background curve numbers were determined from Table 33. The background curve numbers in all cases were based on “woods” in “good” condition. The curve number for the proper hydrologic soil group was then selected and the results were entered in column 6 of Table 32.

7. The 2-year, 24-hour precipitation (i.e., annual maximum 24-hour precipitation with a recurrence interval of 2 years or 50% probability of occurring in any given year) was estimated for each subwatershed. This information was obtained using a GIS shapefiles titled “2-Year, 24-Hour Precipitation”, available from the Southwest Oregon Province GIS Data CD. Results were then entered in column 7 of Table 32.
8. Using the current curve number in column 5 and rainfall depth in column 7, runoff depths were identified from Table 34 (See Appendix) for each cover type / treatment combination. Values were interpolated to obtain runoff depths for curve numbers or rainfall amounts not shown. Results were entered in column 8 of Table 32.
9. Using the background curve number in column 6 and rainfall depth in column 7, the runoff depth from Table 34 was identified. Results were identified in column 9 of Table 32.
10. Change in runoff depth from background conditions to current conditions was calculated by subtracting the Background Runoff Depth (column 9) from Current Runoff Depth (column 8). Results were entered in column 10 of Table 32.

Table 35 (See Appendix)

11. The average change from background was calculated (sum of column 10, Table 32, divided by number of HSGs) from all the combinations of cover type / treatment and hydrologic condition. Results were entered in column 3 of Table 35. Percentages from Table 31, column 4 (A, B, C or D) were transferred to column 2 of Table 35.
12. Where more than one hydrologic soil group is dominant in a subwatershed steps 3 through 11 were repeated. Results were entered in column 5, 7, and 9 of Table 35. Percentages from Table 31, column 4 (A, B, C or D) were transferred to column 4, 6, and 8 (respectively) of Table 35.
13. Weighted averages were computed and results entered in column 10 of Table 35.
14. Using the subwatershed average change from background (column 3, Table 35) or the weighted average (column 10, Table 35) the potential hydrologic risk was selected and entered into column 11 of Table 35.

Potential Risk of Agriculture and/or Rangelands

Change in Runoff From Background (inches)	Relative Potential for Peak-Flow Enhancement
0 to 0.5	Low
0.5 to 1.5	Moderate
>1.5	High

D3 RESULTS

Table 31 Agricultural Land Use and Rangeland Use Summary

Subwatershed	Total Area (acres)	Area in Ag or Range Use (acres) (%)		Hydrologic Soil Groups in Agricultural Lands or Grazed Lands							
				A		B		C		D	
				(acres)	(%)	(acres)	(%)	(acres)	(%)	(acres)	(%)
Beaver Area	5,218	848	16.3	0	0	396	46.7	366	43.2	84	9.9
Big & Otter Area	6,842		0.0	0	0	0	0.0	0	0.0	0	0.0
Crystal Creek	5,466	852	15.6	0	0	125	14.7	128	15.0	600	70.4
Dry Creek	10,226	208	2.0	0	0	140	67.3	67	32.2	2	1.0
Edson Creek	6,919	292	4.2	0	0	241	82.5	51	17.5	0	0.0
Elephant Rock Area	10,811	82	0.8	0	0	64	78.0	9	11.0	9	11.0
Lower Sixes Mainstem	5,837	2,948	50.5	0	0	918	31.1	1,187	40.3	845	28.7
Middle Fork Sixes	4,938		0.0	0	0	0	0.0	0	0.0	0	0.0
North Fork Sixes	10,820	69	0.6	0	0	15	21.7	16	23.2	38	55.1
South Fork Sixes	9,640		0.0	0	0	0	0.0	0	0.0	0	0.0
Upper Sixes Mainstem	8,943	678	7.6	0	0	86	12.7	519	76.5	73	10.8
Total Acres % Percents	85,660	5,977	7.0	0	0	1,985	33.2	2,343	39.2	1,651	27.6

Table 32 Curve Number and Runoff-Depth Summary Table for Primary/Secondary Hydrologic Soil Groups (See Appendix)

Table 35 Agriculture/Rangeland Risks of Peak Flow Enhancement (See Appendix)

D4 KEY FINDINGS

- Land use in the Lower Sixes Mainstem subwatershed is over 50% agriculture/range or rural residential. Crystal Creek and Beaver Area subwatersheds both contain more than 15% of their area in agriculture/range or rural residential use.
- A moderate level of risk to peak flow enhancement was determined for the following subwatersheds: Beaver Area, Crystal Creek and Lower Sixes Mainstem.
- All areas in agriculture or range use can be considered in compacted state and elevating percent of runoff. However, more information is needed to determine an accurate estimate of agriculture or range use.
- Hydrologic Soil Groups for most subwatersheds is predominantly C. Very little variability in runoff from soils throughout the basin.

E1 FOREST AND RURAL ROAD IMPACTS ON HYDROLOGY

Road networks associated with forestry can alter the rate of infiltration on the road surface and potentially change the shape of the natural drainage. The surface of most forest roads is compacted soil that prevents infiltration of precipitation. Forest road networks primarily increase streamflow by replacing subsurface with surface runoff pathways (e.g., roadside ditches) (Bowling and Lettenmaier 1997). Roads can also intercept and divert overland flow and shallow subsurface flow, potentially rerouting the runoff from one small sub-basin to an entirely different subbasin (Harr et al. 1975 and 1979). Roads can potentially impact peak flows during rainfall events, rain-on-snow events, or spring snowmelt; therefore, the determination of percent of basin occupied by roads provides useful information regardless of the way in which peak flows are generated.

Rural roads associated with either agriculture or rangelands can also affect streamflow and will be characterized in a similar manner as forest roads. Roadside ditches are more structured and maintained along rural roads and can significantly extend the stream network density, because their presence is additional to the natural channel. However, if natural channels are altered through straightening or channelizing, the stream network length may decrease. Channelizing streams results in increased velocities and potentially increases erosion rates of the banks and bed.

Roads along stream channels restrict lateral movement and can cause a disconnection between the stream or river and its floodplain. Restricting lateral movement can result in down-cutting of the channel and decreased accessibility of flood waters to over-bank storage, resulting in decreased flood peak attenuation.

E2 INTRODUCTION

The focus of the road assessment is to determine the quantity of roads within the watershed but does not account for the condition of the roads. A more refined scale to separate out well-built roads that do not accelerate the delivery of water or sediment to the channel from roads that are poorly constructed is beyond the scope of this section. For example, extension of the surface-water drainage network by roadside ditches is often a major influence of increased flows. Roads with proper culvert placement and frequency may alleviate some of these impacts.

The assessment of forest and rural road impacts on hydrology in the Sixes River watershed is designed to determine what area of the forestry-designated portion of each subwatershed is occupied by roads, as well as by rural roads in agricultural or rangeland areas, and to rate subwatersheds for potential hydrologic impacts.

Potential Risk for Peak-Flow Enhancement

Percent of Forested Area in Roads	Potential Risk For Peak-Flow Enhancement
< 4%	Low
4% to 8%	Moderate
> 8%	High

E3 METHODOLOGY

Tables 36 & 37 (See Appendix)

1. Total watershed area (square miles) and total area of forestry and rural use (acres & square miles) of each subwatershed was determined using GIS analysis. See Land Use Summary for details. Results were entered in columns 2 through 4 of Tables 36 and 37.
2. Total linear distance of forest roads and rural roads were determined using GIS analysis. Results were entered in columns 5 of Tables 36 and 37.
3. Area of each subwatershed occupied by roads was determined by multiplying column 5 by the width of the road (in miles). The average width for forest roads was assumed at 25 feet (0.0047 miles). The average width for rural roads was assumed at 35 feet (0.0066 miles). Results were entered in column 6 of Tables 36 and 37.
4. The percent of area occupied by forest and rural roads in each subwatershed was computed. Results were entered in column 7 of Tables 36 and 37.
5. A relative potential for forest and rural road impacts was assigned to each subwatershed. Results were entered into column 8 of Tables 36 and 37.

E4 RESULTS

Table 36 Forest Road Area Summary (See Appendix)

Table 37 Rural Road Area Summary (See Appendix)


E5 KEY FINDINGS

- All subwatersheds rate low with respect to relative potential for impact to peak flows from forest roads.
- The Dry Creek subwatershed rates moderate for impacts to peak flows from rural roads however, with only approximately 208 acres in rural areas the potential for impact is relatively insignificant.
- The relative potential for impact largely depends on the extent of roads identified in the analysis. In this assessment a significant amount of roads were not identified because, at the time, they were not available in GIS format. If this analysis were to be repeated using an updated and more complete road coverage the relative potential of impact on hydrology from roads would only increase. *(This updated road coverage is available as of June 2001.)*

REFERENCES

- Bowling, L.C., and D.P. Lettenmaier. 1997. Evaluation of the Effects of Forest Roads on Streamflow in Hard and Ware Creeks, Washington. TFW-SH20-97-001, Water Resources Series Technical Report No. 155, University of Washington, Seattle.
- Branson, F.A., G.F. Gifford, K.G. Renard, and R.F. Hadley. 1981. Rangeland Hydrology. Range Sciences Series No. 1, October 1972, Second Edition 1981. Society of Range Management, Denver Colorado. Kendall/Hunt Publishing Co., Dubuque, Iowa.
- Gifford, G.F., and R.H. Hawkins. 1979. Deterministic Hydrologic Modeling of Grazing System Impacts on Infiltration Rates. Water Resources Bulletin 15(4): 924-934.
- GWEB 1999. Oregon Watershed Assessment Manual. Governor's Watershed Enhancement Board, July 1999
- Harr, D.R., W.C. Harper, J.T. Krygier, and F.S. Hsieh. 1975. Changes in Storm Hydrographs After Road Building and Clear-Cutting in the Oregon Coast Range. Water Resources Research 11(3).
- Harr, R.D., R.L. Fredriksen, and J. Rothacher. 1979. Changes in Streamflow Following Timber Harvest in Southwestern Oregon. Research Paper PNW-249. February 1979. Pacific Northwest Forest and Range Experiment Station, U.S. Department of Agriculture, Forest Service, Portland, Oregon.
- Stewart 2001. Personal communication with Dale Stewart, Soil Scientist, U.S. Bureau of Land Management, Coos Bay, Oregon.
- USDA (US Department of Agriculture) Soil Conservation Service. 1986. Urban Hydrology for Small Watersheds. Technical Release 55.
- Weinhold 2001. Personal communication with Mark Weinhold, Hydrologist, U.S. Forest Service, Powers, Oregon.



Sixes River Land Use

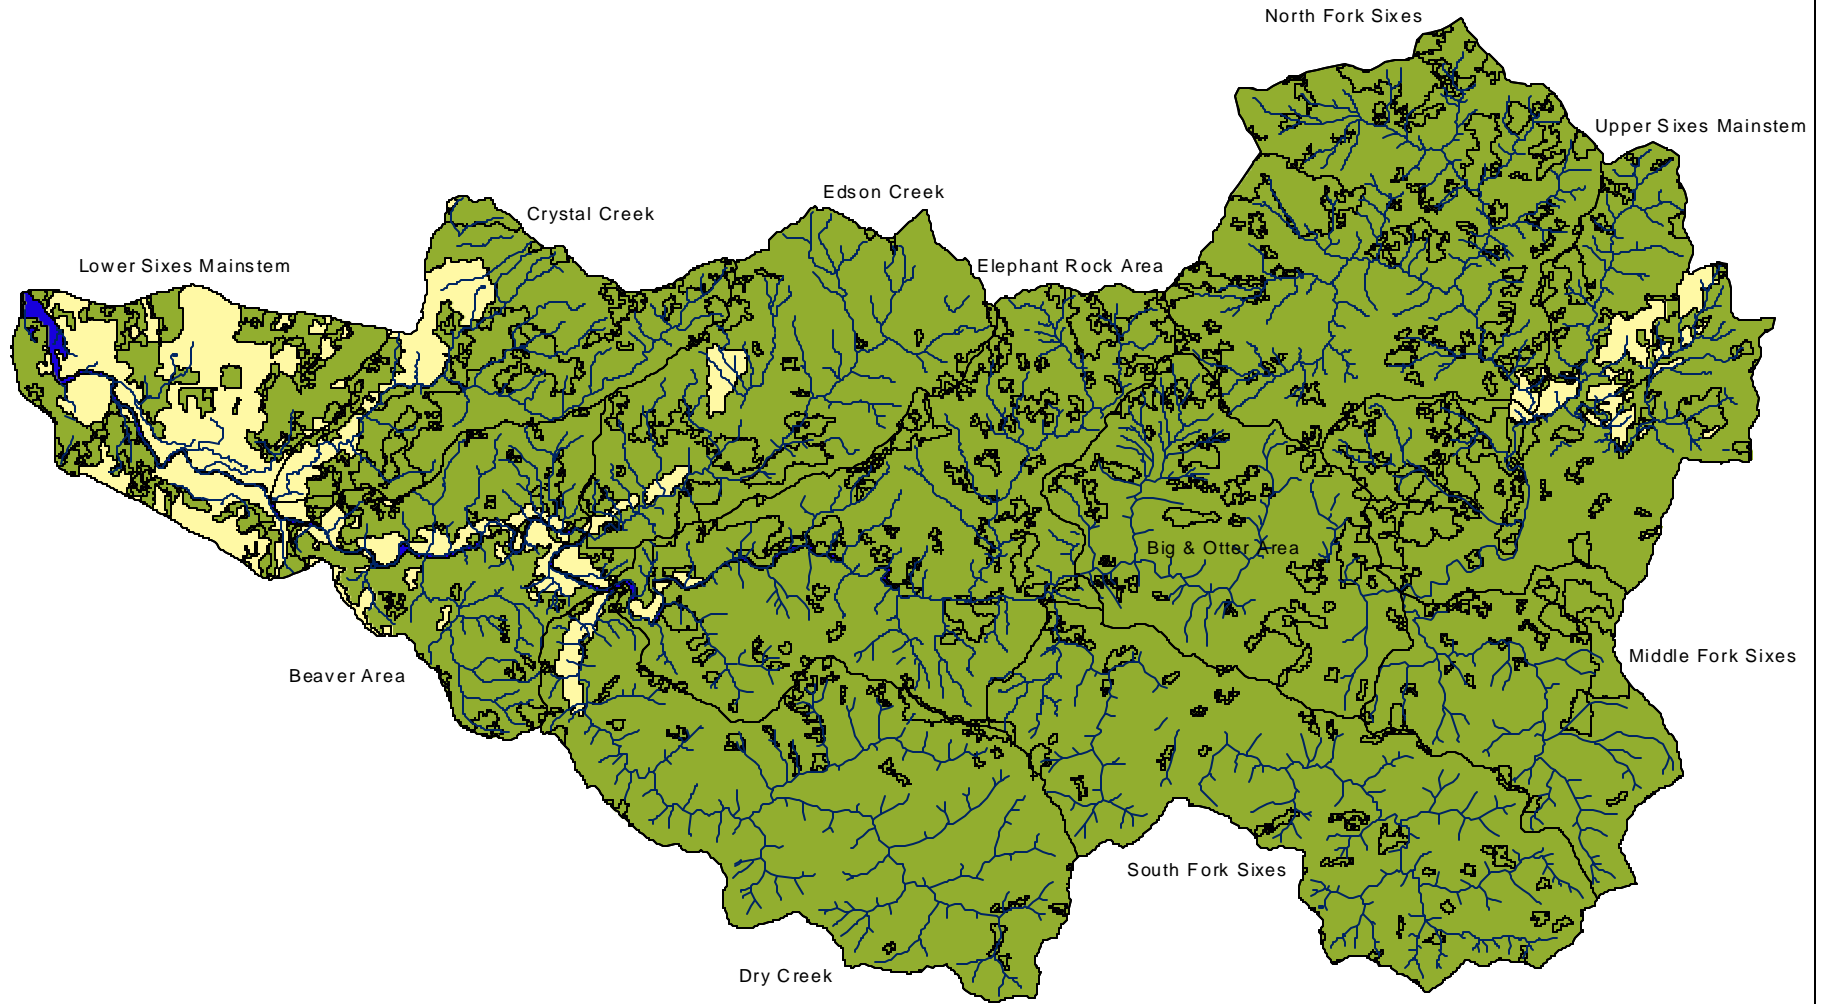


- Sixes Subwatersheds
- △ Sixes Streams
- Sixes Land Use
 - Ag/Range & Rural Residential
 - Forestry
 - Water



Sixes River Average Annual Precipitation

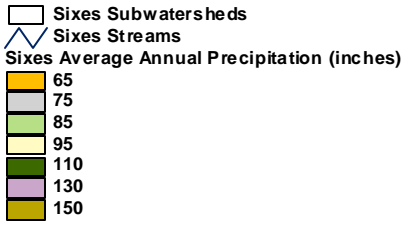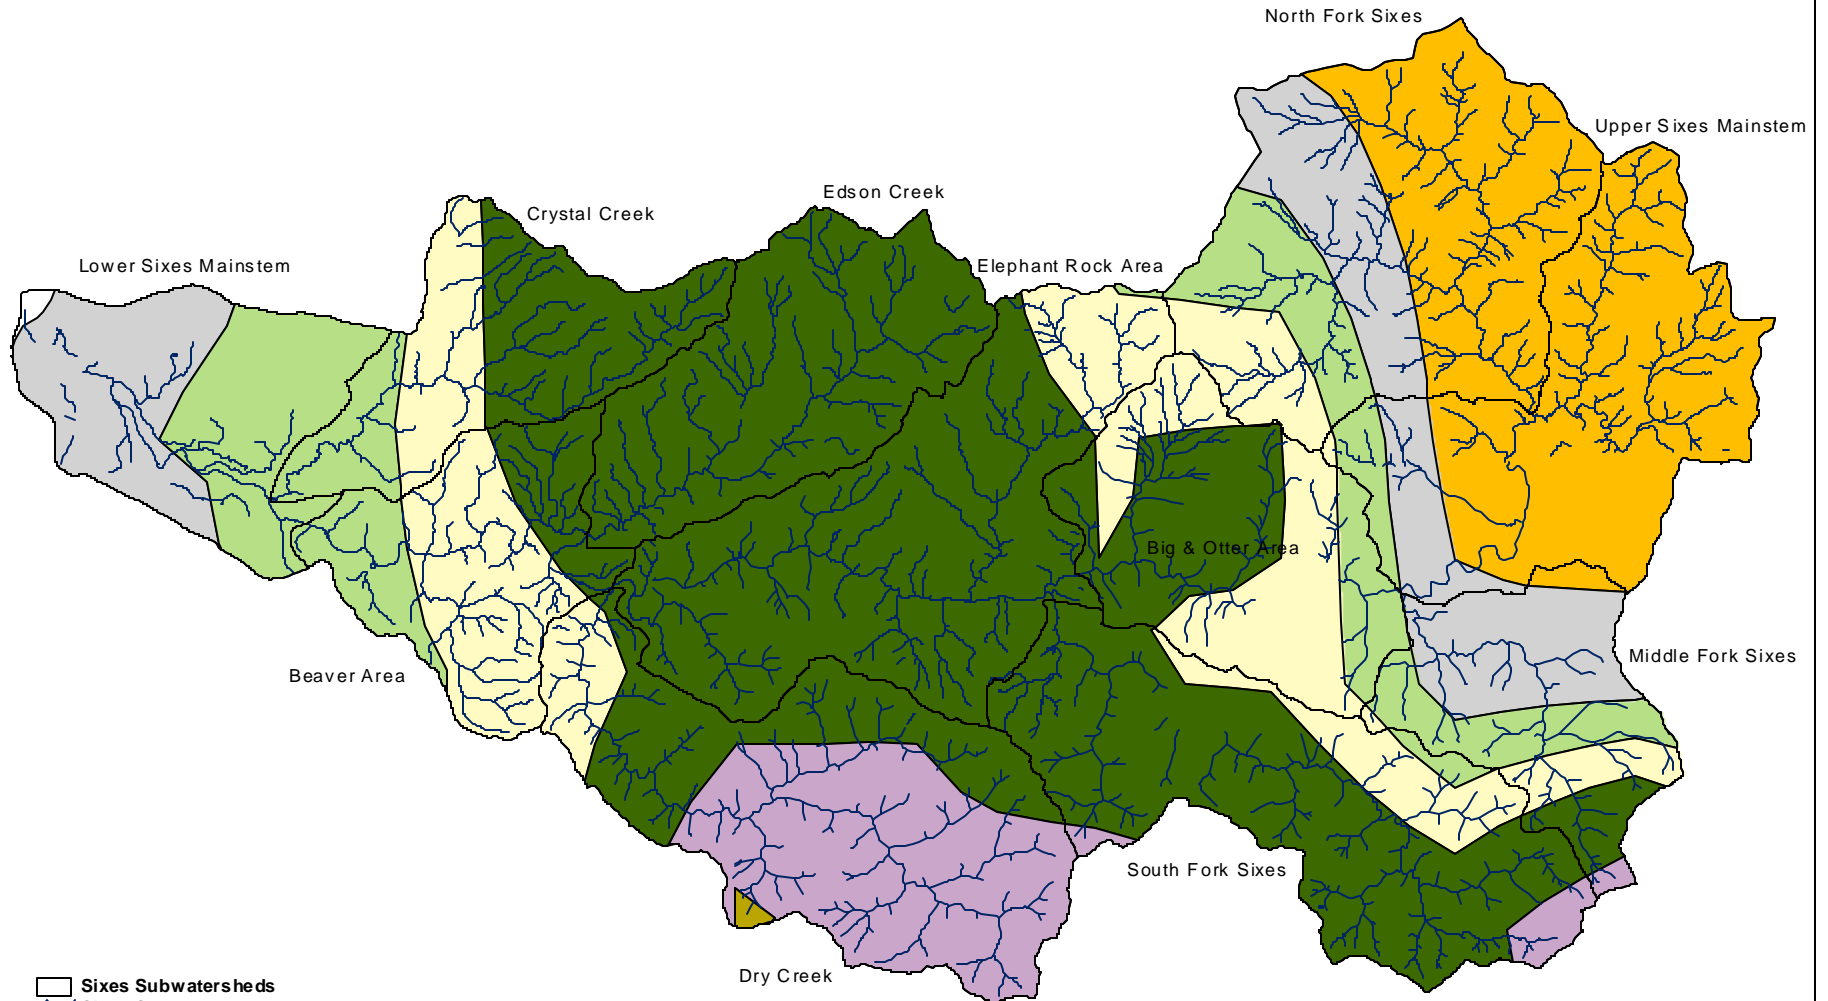

Sixes River Hydrologic Soil Groups

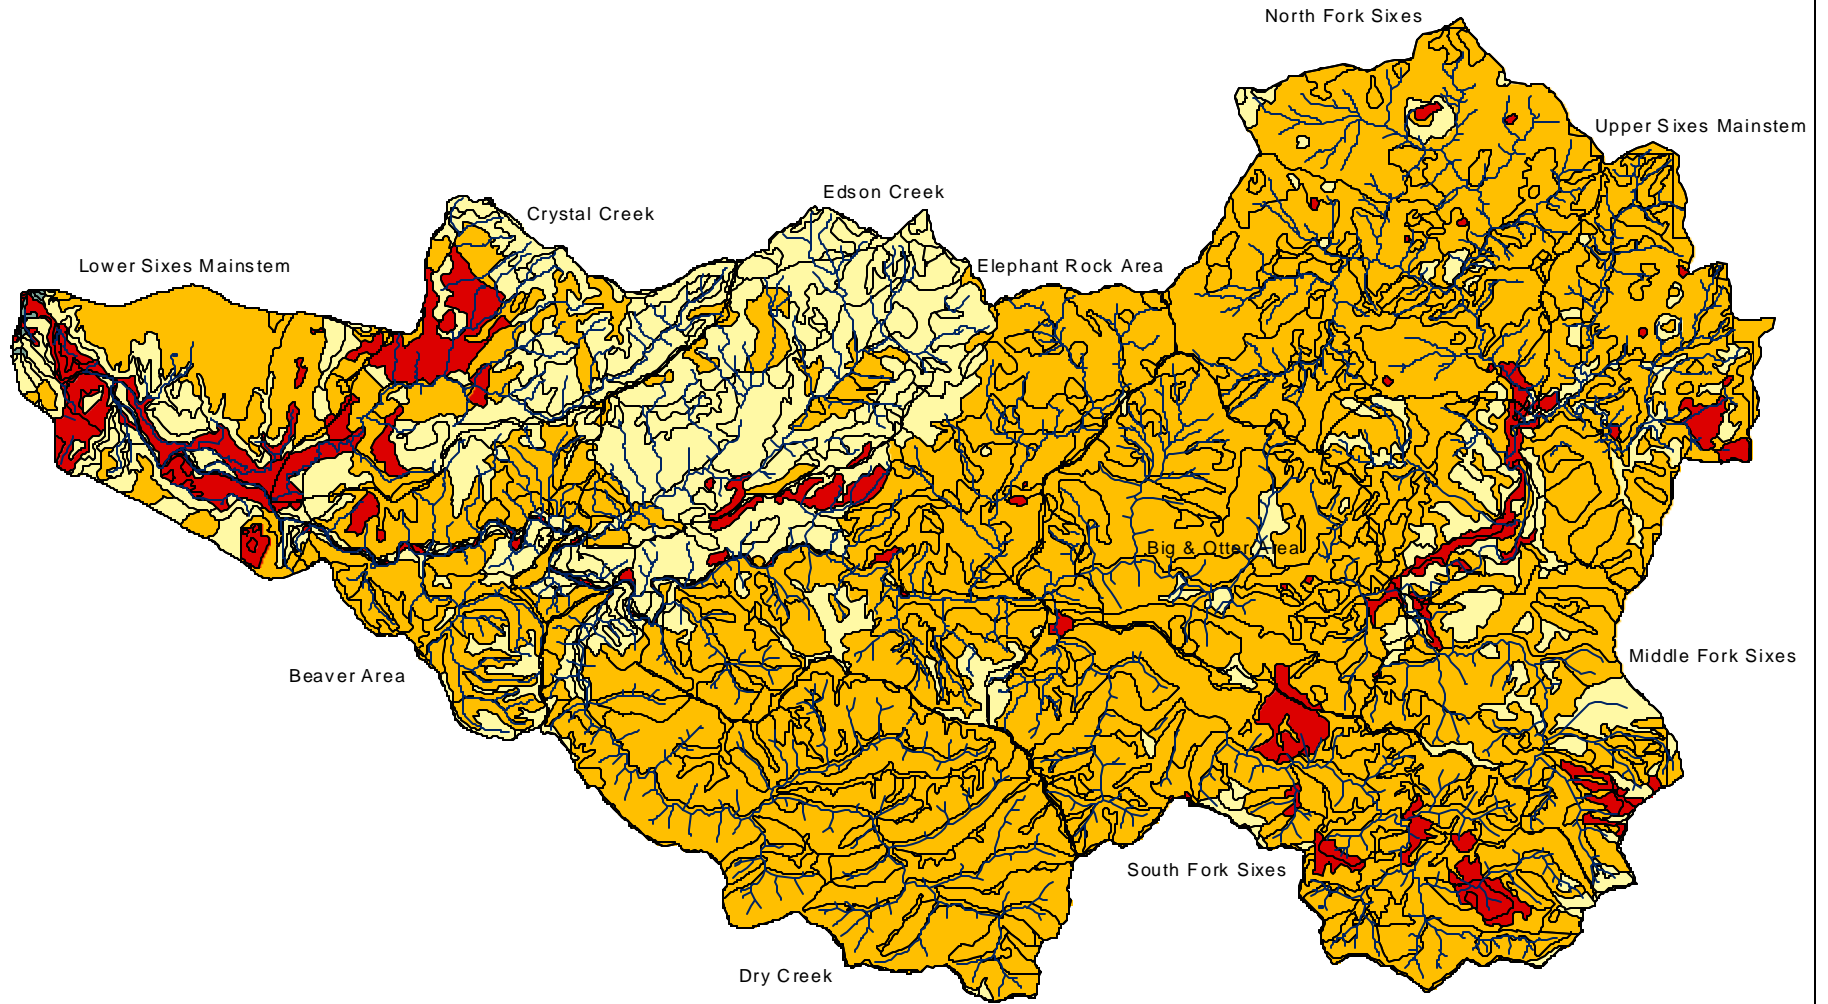

□ Sixes Subwatersheds
▬ Sixes Streams
Sixes Hydrologic Soil Groups

Light Green	A
Light Yellow	B
Orange	C
Red	D



X WATER USE

A BACKGROUND (GWEB 1999)

Water Law and Water Use

Any person or entity withdrawing water from a stream or river must have a water right from the Oregon Water Resources Department (OWRD). These water rights are in various levels of use and certification or adjudication. For example, there are certificates, applications for certificates, water rights on record and not being used, and rights not using their entire full entitlement. Each water right has an instantaneous flow amount (the maximum rate at which water can be withdrawn at any point in time), an annual volume restriction (water duty), and a designated beneficial use, including agriculture, domestic, urban, industrial, commercial, fish and wildlife, power, recreation, etc. Water law in the State of Oregon is based on the Prior Appropriation Doctrine or “first in time, first in right,” subject to the physical availability of water and the ability to put it to beneficial use without waste. The most senior appropriator (the right with earliest date) has a right to divert water prior to any junior right (a later date). The most senior right is the last one to be shut off from diverting water during low stream flows.

In general, agriculture places the greatest demand on our water resources compared to other uses. Water is required for irrigation of crop lands (e.g., cranberry production), pasture and stock watering. In most cases, the period of high demand for irrigation coincides with the period of low streamflow; crop water requirements tend to peak in August, when streamflows are usually the lowest. Water withdrawals are applied to the crop lands for irrigation, and part of that water is used by the crop (evapotranspiration), a portion percolates to deep ground water, and a portion may be returned to another watershed. The total portion not returned to the river is called consumptive use. The portion of the diversion that returns to the stream system through surface and subsurface avenues at points downstream is called return flow.

Urban water supply can provide for residential, commercial, and some industrial uses. Water is diverted, treated, and then distributed throughout a municipality. Subsequently, the wastewater is delivered to a sewage treatment facility where it is treated to a “primary” or “secondary” level and discharged to a stream or bay at a distinct location. In residential settings, for example, water is not actually consumed but returned to the stream network from wastewater facilities. An exception to this is lawn watering which may infiltrate to groundwater. Lawn-irrigation return flow occurs through subsurface avenues.

National forests, national parks, US Bureau of Land Management lands, Indian reservations, etc., are federal reservations. These entities maintain federal reserved rights for the purposes for which the reservations were established. Their priority date is the date the reservation was created. In many cases, reservations were established in the mid to latter part of the 19th century. Many of the federal reservation rights have been tried in the courts of law, and, more often than not, case law has set precedent of adjudicating (to settle judicially) federally reserved water rights. (Winters Doctrine).

Water Rights

There are three primary types of surface water rights: (1) out-of-stream rights, (2) storage rights, and (3) in-stream rights. Out-of-stream rights are also called “direct flow” or “run of the river” diversions. These rights entail withdrawing water directly from the channel with subsequent application for a specific beneficial use such as irrigation, domestic or urban water supply, industrial use, etc. Storage rights can be for on-stream or off-stream reservoirs. On stream reservoirs capture water as it flows into the reservoir. Water is stored until it is needed for the specified beneficial use, at which time it is released either into the channel and withdrawn downstream or released into the river to the storage site, and subsequent release and conveyance to the point of use. In-stream rights are those that require a designated quantity of water to remain in the stream or river for a specified beneficial use, most often for aquatic resources, wildlife, or aesthetics.

Water withdrawals reduce streamflows, potentially resulting in a negative impact on the biologic resources, particularly during the low-flow season. In recent years, in-stream water rights have become more common as a means of protecting the biologic resources. In-stream water rights did not exist in Oregon prior to 1955. Minimum flows were established by administrative rule in 1955, but they did not carry the full weight of a water right. Between 1955 and 1980, the Oregon Department of Fish and Wildlife conducted basin investigations from which minimum flows were recommended and adopted by rule. In 1987, the legislature changed the administrative rulemaking into an application process for a water right. OWRD holds the water right, but ODFW, Department of Environmental Quality, and State Parks can apply for an in-stream right. Minimum flows were changed into in-stream rights, and the date minimum flows were adopted became the priority date. The in-stream rights can have the value up to but not exceeding the median flow. In-stream rights tend to be junior to the majority of the out-of-stream water rights; this reduces their ability to maintain effective streamflows in the channel. If federal reserved rights for in-stream flows have been adjudicated, they would usually have the most senior right in the basin, because federal reservations were established before the implementation of the Prior Appropriation Doctrine.

Water users with large demands generally have storage rights, because reservoirs provide a more certain supply during low-streamflow conditions. The ability to capture streamflow during the high flows and use it during low flows can be a significant benefit to water users. In some instances, reservoirs are constructed as flood control facilities to provide attenuation of the peak flows and reduce downstream flooding and damage.

Groundwater rights are those attached to the withdrawal of water from a well. With some exceptions, all water users extracting groundwater as the source of supply must have a water right for the legal use of water. There are exempt uses that do not require a right. The most significant of these is rural residential water users; these users are limited to 15,000 gallons per day for noncommercial use and irrigation of less than 0.5 acres.

Groundwater has the potential to influence surface water by what is called hydraulic continuity. Depending on the location of the well and the geology in the area, water withdrawn can have a corresponding effect on the streamflow. In other words, it is

possible for the extraction of groundwater to dry up a nearby stream during low flows. Consequently, the State of Oregon manages surface and groundwater rights conjunctively, which means there are times at which groundwater withdrawals will be shut down due to low flows in the channel.

Storage

Man-made storage facilities such as water supply reservoirs, flood control reservoirs, or multipurpose reservoirs impact the peak flows downstream of the impoundment. Each reservoir has its unique operating scheme, and therefore requires more detailed hydrologic investigations, often including release schedules, reservoir routing, etc.

Water Availability

The OWRD has developed a computer model, Water Availability Report System (WARS), which calculates water availability for any of their designated water availability basins (WABs) in the state. Water availability, as defined by the OWRD, refers to the natural streamflow minus the consumptive use from existing rights. It is the amount of water that is physically and legally available for future appropriation. If water is available, additional in-stream or out-of-stream rights may be issued. This value is dynamic and is often updated to account for issuance of new water rights.

The WARs program produces both the 80% exceedance and the 50% exceedance flows, along with the associated water availability under each condition. The 50% exceedance flow is the same as the median flow value. The median flow value means half the time the natural flows are above this value and half the time flows are below this value. The 50% exceedance flows were those used as an upper limit in developing in-stream rights for aquatic species and other in-stream beneficial uses. Water rights for out-of-stream use are issued only when water is available at the 80% exceedance level. (*This assessment considered only water availability at the 50% exceedance flows.*)

Salmonid Fish Considerations

Potential channel dewatering (zero flow in the channel) can present problems for spawning and fish passage. Typically, the spawning period that coincides with the lowest flow begins on approximately September 1 and extends through October. Rearing habitat in the summer also requires flow levels to be maintained. While these are the critical times of the year, flow levels throughout the year need to be maintained to cover all life stages of all species present in a watershed.

Streamflow Restoration Priority Areas

Oregon's Departments of Fish and Wildlife and Water Resources collaborated to develop the Streamflow Restoration Priority Areas (SRPA). This effort was an outcome of the Oregon Plan (1997), which is the broader framework for the Coastal Salmon Restoration Initiative (CSRI). The CSRI mission is to restore coastal salmon populations and fisheries to sustainable levels. Three major factors were identified in CSRI as exacerbating the loss of fish populations: (1) fish resources, (2) fish habitat, and (3) loss of streamflow. The loss of streamflow is the focus of the SRPA analysis.

The identification of priority areas was based on a combination of biological factors and water use. ODFW identified priority areas to enhance fish populations. A rank was assigned to three categories under fisheries: (1) fish resources; (2) habitat integrity; and (3) risk factors such as listing under the Endangered Species Act, in-stream flow protection, or natural low-flow problems. OWRD identified areas in which an opportunity existed to enhance in-channel flows, situations under which water could be saved through conservation, efficiency of use, etc. The criteria for water resources was assigned to two categories: (1) consumptive use by percentage of the median (50% exceedance) streamflow, and (2) number of months an in-stream water right is not met. A priority was established based on the combination of the two resulting factors: “need” (fisheries) and “optimism” (water resources). Determination of the South Coast Flow-Restoration Priorities requires that the “need” rank 3 or 4 and the “optimism” rank 2, 3, or 4. In the need and optimism column, 1 is the lowest rank and 4 is the highest.

Basin	Flow Restoration		
	Need	Optimism	Priority
South Coast	1 or 2	1	No
	3 or 4	2,3 or 4	Yes

B INTRODUCTION

Water use is generally defined by beneficial use categories such as municipal, industrial, irrigated agriculture, etc. The Water Use Assessment summarizes the water rights in the Sixes River watershed and intends to provide an understanding of what beneficial uses these water withdrawals are serving. The assessment of water use is primarily focused on low-flow issues. While low-flow issues can be extremely important, they are difficult to characterize at the screening level. Water use activities can impact low flows, yet the low flows can be enhanced through adopting water conservation measures to keep more water in the stream system.

The basis for the water use assessment is the output from the Water Availability Reports System (WARS) and other data provided by the OWRD. Their system has accounted for consumptive use and presents the best available information at this time.

C METHODOLOGY

Figure 3 Storage Rights

- Storage rights (measured in Acre Feet) were identified in the Sixes River watershed.

Figure 4 Out-of-Stream Rights

- Water rights information was obtained from the OWRD Water Rights Information System (WRIS) files. Although not presented in this document, information relevant to the assessment of water use was summarized, sorted and listed by date.
- Figure 4 illustrates the total out of stream water rights (CFS) by type of use for the Sixes River watershed.

Table 38 In-Stream Rights

- In-stream Rights were obtained by request from the OWRD.

Table 39 Streamflows

- Streamflows measured by the South Coast Watershed Council and Oregon Department of Water Resources during the summer months of 1998 to 2000 were listed.

Table 40 Water Availability Summary (See Appendix)

- Water Availability Reports were obtained from the OWRD web site.
- Net water available, at the 50% exceedance level, for each month and for each Water Availability Basin (WAB) within the watershed was listed. **Note:** WABs do not necessarily correspond to subwatershed boundaries.
- For each month and each WAB the “net water available” less than or equal to zero was highlighted to indicate that water is not available at the 50% exceedance level.

Table 41 Streamflow-Restoration Priority Areas (See Appendix)

- Priority WABs, designated as streamflow restoration priority areas, were identified for each applicable season.

D RESULTS

Figure 3 Storage Rights (AF)

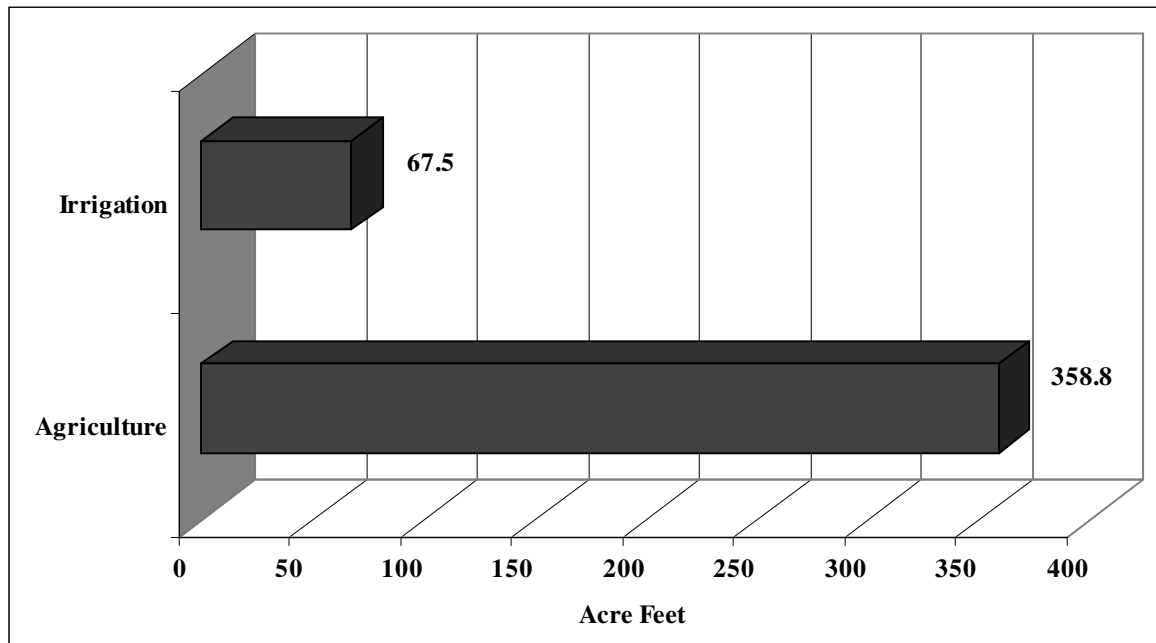


Figure 4 Out-of-Stream Rights (CFS)

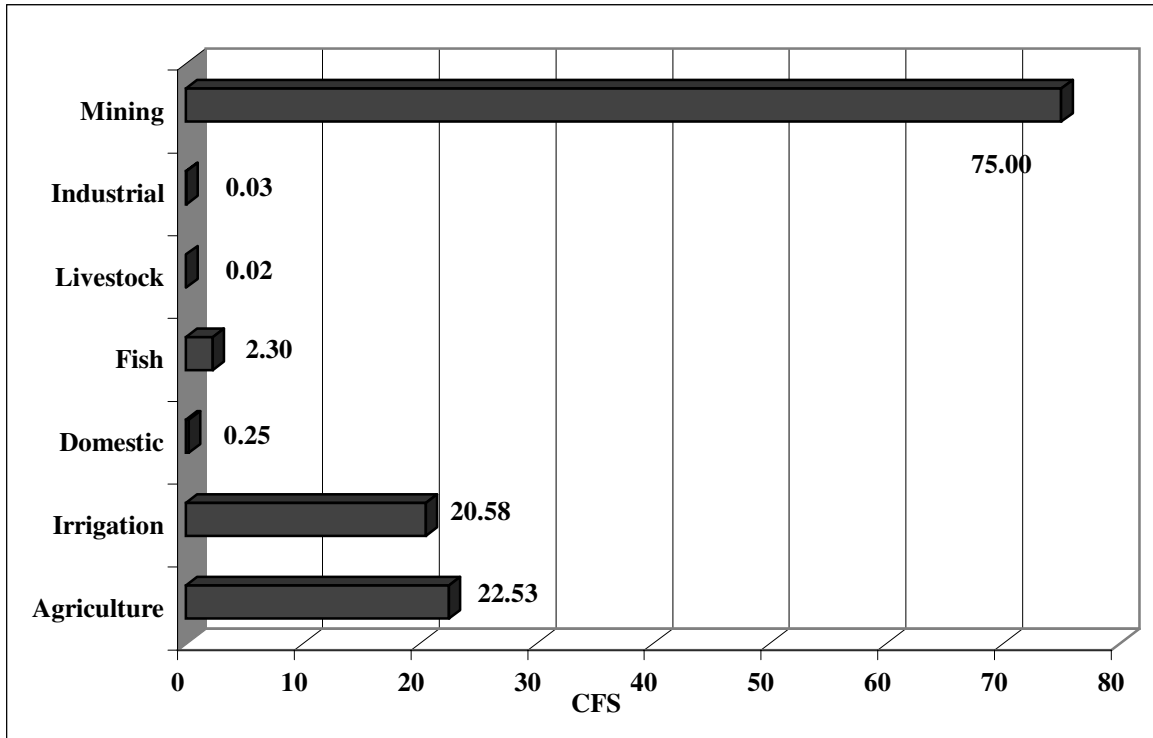


Table 38 In-Stream Water Rights

Location	Reach (From/To)	Certificate #	CFS			Priority Date
			July	August	September	
Sixes River	Below Edson Cr. / Tidewater	NA	30	25	25	5/22/64
Sixes River	Below Edson Cr. / Tidewater	NA	40	25	25	4/1/80
Sixes River	River Mile 10.1 / River Mile 0	NA	125	104	74.9	11/8/90
Sixes River	River Mile 18.5 / River Mile 10.1	73165	41.8	24.4	15.1	11/8/90
Sixes River	River Mile 23.7 / River Mile 18.5	73078	40	32.3	23	11/8/90
Sixes River	River Mile 28.4 / River Mile 23.7	73079	24	15.1	10.2	11/8/90
Middle Fork	River Mile 4.5 / River Mile 0	72784	7.74	4.53	2.98	11/8/90
North Fork	River Mile 2 / River Mile 0	72891	9.84	5.55	3.56	1/29/93
South Fork	River Mile 6 / River Mile 0	72779	15.1	9.17	7.46	11/8/90
Sugar Creek	Headwaters / River Mile 0	72892	1.13	0.56	0.31	1/29/93
Crystal Creek	River Mile 3.5 / River Mile 0	73086	14.7	9.51	6.75	11/8/90
Dry Creek	River Mile 5.5 / River Mile 0	72791	17.9	11.1	8.13	11/8/90
Edson Creek	River Mile 5 / River Mile 0	73166	15.9	9.86	6.93	11/8/90
Elephant Rock Creek	Headwaters / River Mile 0	73137	8.18	4.93	3.31	1/29/93
Hayes Creek	Headwaters / River Mile 0	72890	3.55	2.3	1.64	1/29/93
Otter Creek	Headwaters / River Mile 0	72893	3.59	2.16	1.43	1/29/93

Table 39 Streamflows

Location	2000 Date	Flow (cfs)	1999 Date	Flow (cfs)	1998 Date	Flow (cfs)
Sixes River above Dry Creek			August 10	16.0		
Sixes River above Edson Cr.*	August 10	14.9				
Edson Creek at bridge	August 10	2.4	August 11	2.8	August 3	3.0
Sixes River below Edson Cr.*	July 26	33.5				
Sixes River below Edson Cr.*	August 10	24.5	August 11	31.9	August 14	25.4
Crystal Creek*	July 26	4.2				
Crystal Creek*	August 10	2.8	August 11	3.0	August 14	2.11

*All flows from Oregon Department of Water Resources are provisional data pending final review.

E KEY FINDINGS

Out-of-Stream Rights

- Total out of stream rights for the Sixes River watershed equal approximately 120 CFS. Water rights allocated after the establishment of the 1964 in-stream rights are considered "junior rights"; these rights total approximately 41 CFS.
- Two water rights allocated for mining on the South Fork of the Sixes River comprise over 60% of all out of stream rights in the basin. These two rights are "senior rights"; senior rights are not regulated if and when actual flows fall below the flows associated with the 1964 in-stream rights. **Note:** *It was beyond the scope of this assessment to determine actual water use for these or any other water rights.*
- Water rights allocated for agriculture and irrigation use total over 40 CFS. A significant amount of these water rights are specifically allocated for cranberry production/harvest.

Storage Rights

- Storage Rights include all water rights allocated in Acre Feet (AF). Total storage rights equal approximately 426 AF.
- The majority of storage rights in the Sixes River watershed are allocated for agricultural use. A significant amount of these water rights are specifically allocated for cranberry production/harvest.

In-Stream Rights

- The 1964 in-stream right is 30 CFS in July and 25 CFS during August and September. All water rights considered "junior" to the 5/22/64 in-stream right may be regulated if actual streamflow falls below the in-stream right flows.

Water Availability Summary

- The net water available at the 50% exceedance level, from May to October, is less than or equal to zero for the entire Sixes River basin.

Streamflow Restoration Priority Areas

- According to the ODFW/OWRD Streamflow Restoration Priority Areas there are two priority Water Availability Basins in the Sixes River. They include Crystal Creek and an area similar in size and location to the Lower Sixes Mainstem subwatershed.

REFERENCES

GWEB 1999. Oregon Watershed Assessment Manual. Governor's Watershed Enhancement Board, July 1999

XI WATERSHED SYNTHESIS

The Sixes River Watershed is contained mostly in the Southern Oregon Coastal Mountains with high natural erosion rates and steep slopes. The lower end of the watershed is within the Coastal Lowlands ecoregion and has very gentle gradients and low erosion rates. The watershed is 93 percent forest and 7 percent agriculture/rural use. National Forest lands cover about a quarter of the watershed, primarily in the Dry Creek (Grassy Knob Wilderness Area), South Fork Sixes, and the Big and Otter Area. The southern half of the watershed has topography similar to the Elk watershed, with steep slopes and less stable sediments. The northern half is more like Floras/Coquille topography, with more moderate slopes.

The Big and Otter Area has a high density of road crossings. Elephant Rock, Dry and North Fork Sixes are moderate-high for crossing density. Crystal Creek, Edson Creek, the Middle Fork, and South Fork Sixes are moderate for road crossing density. For density of roads on steep slopes, Dry Creek is ranked high, and the South Fork Sixes and Big and Otter Area are ranked moderate.

Risk of peak flow enhancement (PFE) due to agriculture in the Beaver Area, Crystal Creek, and the Lower Sixes Mainstem is rated as moderated to low. Risk is rated as moderate in Dry Creek due to rural roads, though it is only on 208 acres. Risk of PFE due to timber harvest, and forest roads is low in all sub-watersheds.

Channel habitat types were the most diverse of any South Coast watershed, with a high amount of low/moderate gradient moderately confined channels (the best for restoration). These high response channel types are located throughout the watershed.

Coho distribution is spread widely through the watershed, with only the South Fork Sixes blocked by natural falls. Chinook distribution is similar, with more limited use in the upper watershed. Steelhead distribution is very widespread, including the entire mainstem and all significant tributaries. An area of coho habitat in the upper Sixes Mainstem may have good potential for restoration. Dry Creek is very high quality spawning habitat, especially in the lower portion. The Sixes estuary is the most complex of any on the South Coast, with large wood, large size and a variety of habitats available.

Riparian vegetation is strong in Sixes watershed, with lots of mature forests to contribute large woody material to the stream and provide high quality shade. Expansion of gorse populations are a large concern. In some areas riparian stream cover seems to be receding, possibly due to high sediment loads and channel movement.

Water use in the Sixes watershed is a concern. Crystal and Edson Creeks do not meet their in-stream water rights in July, August, and September. The Mainstem Sixes water right of 25 cfs is usually not met, either. Many out-of-stream rights are junior to the in-stream right or are storage/time limited rights. Cranberries are the largest users of water

in the system, and typically have storage rights. Two "mining" rights in the South Fork total to 75 cfs.

Water quality is a concern in the Sixes watershed. The Mainstem Sixes and the South Fork Sixes are 303(d) listed for temperature concerns. The Mainstem and Benson Creek are being investigated for sedimentation issues, and Rusty Creek is under investigation for habitat modification. Measurements of chemical water quality at the Highway 101 bridge show moderate impairment for nitrate, phosphate and fecal coliform bacteria. Dissolved oxygen levels are low in the summer months. Heavy metals contributed by mining activities are a concern, especially near the Sixes River recreational mining site. High turbidity (compared with Elk river) is a result of both soil clay content and more intensive land management. Channel dimensions may be changing with present sediment load.

Temperatures are warm to very warm. The highest measurement was 76 degrees F, taken in the mainstem above the confluence with Dry Creek. Water temperatures in the mainstem increase considerably in the reach between Elephant Rock and Dry Creek, and again between Edson Creek and Highway 101.

The Sixes watershed has 44 different wetland areas, containing about 1,372 acres. Nearly all are in the lower watershed, with roughly a third having low alteration and good restoration/protection potential. A number of opportunities exist for reconnecting wetlands to the mainstem for providing better off-channel coho rearing habitat.

Limiting factors to fish production and water quality in the Sixes watershed appear to be water use and water quality (temperature and chemistry, possibly pollution). Sediment transport/storage, lack of large wood, and noxious weed invasion are also of concern.

APPENDIX

Table 13 Riparian Habitat Condition Summary

Original Data Source: AQIP =ODFW Aquatic Inventory Project
 Rating Codes: D: Desirable, U: Undesirable, B: Between; ND: No Data

Source	Sub WA	Stream	Reach	Date	Width	Conifers # > 20 in dbh Con_20plus	Conifers # > 35 in dbh Con_36plus	Bench- mark	Opensky	Shade = 180 - Opensky	Bench- mark	Overall Riparian Benchmark	Bank Erosion Bankerosi*	Percent Secondary Channels Pctscchnla*
AQIP	BA	BEAVER CREEK	1	9/22/97	2.9	0.0	0.0	U	20.0	160	D	*	0.9	0.1
AQIP	BA	BEAVER CREEK	2	9/22/97	2.6	0.0	0.0	U	10.0	170	D	*	2.2	0.7
AQIP	BA	BEAVER CREEK	3	9/23/97	1.9	0.0	0.0	U	6.0	174	D	*	3.2	7.4
AQIP	NF	CARLTON CREEK	1	8/3/93	3.0	0.0	0.0	U	3.0	177	D	*	3.8	0.6
AQIP	MF	MID FK SIXES RIVER	1	8/18/93	5.3	18.1	0.0	U	10.0	170	D	*	5.5	1.2
AQIP	NF	N FK SIXES RIVER	1	8/1/93	5.6	0.0	0.0	U	29.0	151	D	*	1.2	0.1
AQIP	NF	N FK SIXES RIVER TRIB 2	1	8/12/93	3.3	0.0	0.0	U	99.0	81	U	*	1.7	0.2
AQIP	BO	SIXES RIVER	1	7/27/93	8.3	6.0	0.0	U	34.0	146	D	*	5.2	1.4
AQIP	UM	SIXES RIVER	2	7/29/93	7.4	0.0	0.0	U	29.0	151	D	*	3.9	0.7
AQIP	UM	SUGAR CREEK	1	7/20/94	2.3	0.0	0.0	U	1.0	179	D	*	0.0	2.0
AQIP	UM	SUGAR CREEK	2	7/20/94	2.0	0.0	0.0	U	0.0	180	D	*	0.0	0.0

*Benchmarks do not exist for these parameters; however, they provide some interesting information on general observed conditions.

Subwatershed Codes:

NF North Fork Sixes
 UM Upper Mainstem Sixes
 SF South Fork Sixes
 MF Middle Fork Sixes
 BA Beaver Area
 BO Big & Otter Area

Table 14 Pool Habitat Conditon Summary

Original Data Source: AQIP = ODFW Aquatic Inventory Project

Rating Codes: D: Desirable, U: Undesirable, B: Between; ND: No Data

Source		Stream	Reach	Length Sampled	Land Use	Gradient	Sub WA	Sub Width	Pool Area		Pool Frequency		Residual Pool Depth		Complex Pools		Overall Pool Rating
									Pctpool	Bench- mark	Cwpool	Bench- mark	Residpd	Bench- mark	Compool_km	Bench- mark	
AQIP	9/22/97	BEAVER CREEK	1	1077	ST	1.3	BA	2.9	22	B	7.9	D	0.6	U	0	U	U
AQIP	9/22/97	BEAVER CREEK	2	686	ST	1.9	BA	2.6	38.8	D	4.7	B	0.7	U	0	U	U
AQIP	9/23/97	BEAVER CREEK	3	1918	ST	2.4	BA	1.9	36.7	D	6.8	D	0.5	U	0	U	D
AQIP	8/3/93	CARLTON CREEK	1	5118	ST	1.7	NF	3	49.2	D	5.7	D	0.7	U	ND	ND	B
AQIP	8/18/93	MID FK SIXES RIVER	1	5983	ST	3.5	MF	5.3	35	B	4.1	B	0.7	U	ND	ND	U
AQIP	8/1/93	N FK SIXES RIVER	1	3272	ST	0.7	NF	5.6	65.4	D	7.5	D	0.9	B	ND	ND	D
AQIP	8/12/93	N FK SIXES RIVER TRIB 2	1	3379	LG	1.2	NF	3.3	53.3	D	6.6	D	0.9	B	ND	ND	D
AQIP	7/27/93	SIXES RIVER	1	6776	OG	0.9	BO	8.3	56.9	D	4.3	B	1.2	B	ND	ND	B
AQIP	7/29/93	SIXES RIVER	2	5426	ST	0.4	UM	7.4	51.1	D	7.6	D	0.9	U	ND	ND	B
AQIP	7/20/94	SUGAR CREEK	1	1626	ST	2.4	UM	2.3	21	B	17	B	0.2	U	0.6	U	U
AQIP	7/20/94	SUGAR CREEK	2	1017	ST	5.3	UM	2	9.8	U	36.3	U	0.6	B	0	U	U

Subwatershed Codes:

NF North Fork Sixes
 UM Upper Mainstem Sixes
 SF South Fork Sixes
 MF Middle Fork Sixes
 BA Beaver Area
 BO Big & Otter Area

Landuse Codes:

ST Second growth Timber
 LG Large Timber
 OG Old Growth timber

Table 15 Riffle and Woody Debris Habitat Condition Summary

Original Data Source: AQIP = ODFW Aquatic Inventory website

Rating Codes: D: Desirable, U: Undesirable, B: Between; ND: No Data

Source	Sub WA	Date	Stream	Reach	Width/Depth Ratio		Gravel (% area)		Silt-sand-organics (% area)		Overall Riffle Rating	LWD Pieces/100 m		Volume LWD/100 m		Key Pieces/100 m		Overall LWD Rating
					WDRATIO	Bench-mark	PCTGRAVEL	Bench-mark	PCTSNDOR	Bench-mark		LWDPIECE1	Bench-mark	LWDVOL1	Bench-mark	KEYLWD1	Bench-mark	
AQIP	BA	09/22/97	BEAVER CREEK	1	16.2	B	45.0	D	21.0	U	B	2.9	U	0.9	U	0.00	U	U
AQIP	BA	09/22/97	BEAVER CREEK	2	23.9	B	49.0	D	16.0	B	B	6.1	U	7.5	U	0.10	U	U
AQIP	BA	09/23/97	BEAVER CREEK	3	17.7	B	50.0	D	15.0	B	B	6.7	U	14.0	U	0.60	U	U
AQIP	NF	08/03/93	CARLTON CREEK	1	18.4	B	40.0	D	29.0	U	B	29.8	D	47.6	D	ND	ND	D
AQIP	MF	08/18/93	MID FK SIXES RIVER	1	21.1	B	39.0	D	16.0	B	B	16.1	B	18.7	U	ND	ND	U
AQIP	NF	08/01/93	N FK SIXES RIVER	1	22.3	B	35.0	D	19.0	B	B	1.9	U	3.2	U	ND	ND	U
AQIP	NF	08/12/93	N FK SIXES RIV TRIB 2	1	20.2	B	40.0	D	8.0	D	D	4.2	U	5.4	U	ND	ND	U
AQIP	BO	07/27/93	SIXES RIVER	1	21.6	B	36.0	D	21.0	B	B	3.7	U	4.8	U	ND	ND	U
AQIP	UM	07/29/93	SIXES RIVER	2	22.4	B	47.0	D	18.0	B	B	2.9	U	4.1	U	ND	ND	U
AQIP	UM	07/20/94	SUGAR CREEK	1	20.2	B	33.0	B	24.0	U	B	6.3	U	2.7	U	0.00	U	U
AQIP	UM	07/20/94	SUGAR CREEK	2	18.2	B	30.0	B	22.0	U	B	8.6	U	2.9	U	0.00	U	U

Subwatershed Codes:

- BA Beaver Area
- MF Middle Fork Sixes
- NF North Fork Sixes
- UM Upper Mainstem Sixes
- SF South Fork Sixes
- BO Big & Otter Area

Table 19 Flow Data from Elk River Gauge

DATE	4 Days Prior to Sample Date *Flow (CFS)	3 Days Prior to Sample Date *Flow (CFS)	2 Days Prior to Sample Date *Flow (CFS)	1 Day Prior to Sample Date *Flow (CFS)	Sample Date *Flow (CFS)
8/25/82	37	37	37	36	36
10/27/82	538	359	328	905	667
12/15/82	526	550	661	2210	4170
2/16/83	2680	3490	2150	1600	1530
4/27/83	474	489	491	497	465
6/22/83	127	121	114	107	105
10/26/83	62	55	49	47	46
1/25/84	320	330	360	380	440
3/21/84	2090	1450	1120	992	1160
7/25/84	80	79	76	74	74
11/28/84	909	909	813	1470	2900
1/30/85	144	143	167	148	139
9/22/92	35	36	36	37	39
12/16/92	1430	1030	781	636	574
6/8/93	870	820	819	761	678
9/21/93	54	53	52	51	50
12/7/93	228	399	302	247	1380
3/29/94	546	490	437	383	338
6/28/94	135	131	128	124	121
9/14/94	56	46	41	38	36
12/20/94	1760	2930	2220	1640	1200
3/14/95	1670	1880	1410	1210	2080
6/27/95	358	319	294	275	260
12/12/95	1070	1370	1310	1430	3600
3/5/96	1370	1180	1210	2310	2800
6/18/96	172	169	165	160	156
9/10/96	47	46	46	46	45
6/17/97	154	148	140	133	131
9/10/97	37	37	36	35	50
12/9/97	433	391	848	943	730
3/18/98	650	550	490	437	397
7/14/98	79	77	75	73	71
9/22/98	45	45	38	37	36
1/12/99	391	351	320	322	324
3/16/99	555	591	837	746	638
5/5/99	208	538	1280	1000	753
7/13/99	76	75	74	73	72
9/15/99	44	44	44	44	43
11/16/99					
1/25/00					
3/22/00					
7/25/00					
9/14/99					
7/25/00					

Flow Data (CFS) from Elk River Gage

Table 19 Flow Data from Elk River Gage (CFS)

DATE	4 Days Prior to Sample Date *Flow (CFS)	3 Days Prior to Sample Date *Flow (CFS)	2 Days Prior to Sample Date *Flow (CFS)	1 Day Prior to Sample Date *Flow (CFS)	Sample Date *Flow (CFS)
8/25/82	37	37	37	36	36
10/27/82	538	359	328	905	667
12/15/82	526	550	661	2,210	4,170
2/16/83	2,680	3,490	2,150	1,600	1,530
4/27/83	474	489	491	497	465
6/22/83	127	121	114	107	105
10/26/83	62	55	49	47	46
1/25/84	320	330	360	380	440
3/21/84	2,090	1,450	1,120	992	1,160
7/25/84	80	79	76	74	74
11/28/84	909	909	813	1,470	2,900
1/30/85	144	143	167	148	139
9/22/92	35	36	36	37	39
12/16/92	1,430	1,030	781	636	574
6/8/93	870	820	819	761	678
9/21/93	54	53	52	51	50
12/7/93	228	399	302	247	1,380
3/29/94	546	490	437	383	338
6/28/94	135	131	128	124	121
9/14/94	56	46	41	38	36
12/20/94	1,760	2,930	2,220	1,640	1,200
3/14/95	1,670	1,880	1,410	1,210	2,080
6/27/95	358	319	294	275	260
12/12/95	1,070	1,370	1,310	1,430	3,600
3/5/96	1,370	1,180	1,210	2,310	2,800
6/18/96	172	169	165	160	156
9/10/96	47	46	46	46	45
6/17/97	154	148	140	133	131
9/10/97	37	37	36	35	50
12/9/97	433	391	848	943	730
3/18/98	650	550	490	437	397
7/14/98	79	77	75	73	71
9/22/98	45	45	38	37	36
1/12/99	391	351	320	322	324
3/16/99	555	591	837	746	638
5/5/99	208	538	1,280	1,000	753
7/13/99	76	75	74	73	72
9/15/99	44	44	44	44	43

Table 27 Sixes River Wetland Attributes

Wetland ID	7.5 Minute Quad	Subwatershed	Acres	Connected	Cowardin Code	Cowardin Code	Cowardin Code	Cowardin Code	Buffer	Degree of Alteration	Field	Color Code
1	Cape Blanco	Lower Sixes Mainstem	13	Y	E2USN	E2USP	M2USP		FO	LOW	N	R
		<i>Comments: part of active channel</i>										
2	Cape Blanco	Lower Sixes Mainstem	12	Y	E2USN	E2EMP	E2EMN		FO	LOW	N	G
		<i>Comments: part of active channel</i>										
3	Cape Blanco	Lower Sixes Mainstem	21	U	PEMA	E2EMN	E2EMP		FO	LOW	N	R
		<i>Comments: part of active channel</i>										
4	Cape Blanco	Lower Sixes Mainstem	13	N	PEMB				FO	LOW	N	B
		<i>Comments: four unconnected locations in close proximity</i>										
5	Cape Blanco	Lower Sixes Mainstem	7	Y	PEMCx	PEMA			R	MOD	Y	G
		<i>Comments: drained</i>										
6	Cape Blanco	Lower Sixes Mainstem	5	Y	E2USN	E2EMN			FO	LOW	N	G
		<i>Comments: part of active channel</i>										
7	Cape Blanco	Lower Sixes Mainstem	8	Y	PEMC	PSSC	PEMR		R	MOD	N	R
8	Cape Blanco	Lower Sixes Mainstem	85-90	Y	PEMA	PEMB	PEMCx		FO	MOD	Y	B
		<i>Comments: numerous small channels, some natural, some man-made</i>										
9	Cape Blanco	Lower Sixes Mainstem	16	N	PEMA	PEMB			FO	LOW-MOD	N	R
		<i>Comments: four unconnected locations in close proximity and position</i>										
10	Cape Blanco	Lower Sixes Mainstem	23	Y	PEMC				FO	LOW	N	G
		<i>Comments: three sites connected by a ditch/stream</i>										
11	Cape Blanco	Lower Sixes Mainstem	90-95	N	PEMC	PEMA			FO	MOD	Y	B
		<i>Comments: possibly hydrologically isolated by road</i>										

Lower Sixes

Table 27 Sixes River Wetland Attributes

Wetland ID	7.5 Minute Quad	Subwatershed	Acres	Connected	Cowardin Code	Cowardin Code	Cowardin Code	Cowardin Code	Buffer	Degree of Alteration	Field	Color Code
12	Cape Blanco	Mainstem	70-75	Y	PEMA	PEMC	PEMCx		FO	MOD	Y	R
<i>Comments: two ditches drain the area to some degree</i>												
13	Cape Blanco	Lower Sixes Mainstem	105	Y	PSSCx	PFOC	Pss/emC		FO	LOW	N	B
<i>Comments: one ditch exists - its effects are unknown</i>												
14	Cape Blanco	Lower Sixes Mainstem	95	U	PFOA	P ss/fo A			FO	LOW	N	G
15	Cape Blanco	Lower Sixes Mainstem	13	Y	PEMC	PSSC	PFOC		FO	LOW	N	G
16	Cape Blanco	Lower Sixes Mainstem	35	U	PEMA	PFOA			FO	LOW	N	R
17	Cape Blanco	Lower Sixes Mainstem	22	Y	PEMF	PEMC			AG	MOD	N	B
<i>Comments: runs the length of a small ditch/stream</i>												
18	Cape Blanco	Lower Sixes Mainstem	9	N	PSSA	PEMA	PFOA		FO	LOW	N	R
<i>Comments: two unconnected sites in close proximity</i>												
19	Cape Blanco	Lower Sixes Mainstem	120	PARTIALLY	PEMA	PEMCx	PEMC		AG	MOD-HIGH	N	G
<i>Comments: Conditions vary from pure pasture to small depressions and old channels. Near the East end a ditch connects some of the depressions to the river during high flows. The wetland continues East onto Sixes quad but for convience the analyst delineated it at the quad boundary</i>												
20	Cape Blanco	Lower Sixes Mainstem	6	N	PEMA				AG	MOD	N	R
<i>Comments: two unconnected sites in close proximity</i>												
21	Cape Blanco	Lower Sixes Mainstem	95-100	PARTIALLY	PEMC	PEMA	PFOA		AG	MOD-HIGH	N	R
<i>Comments: Conditions vary: low depression and better drained pasture. Some of the depressions probably have an open water connection to a stream running along the southern perimeter during high flows. The best restoration opportunities would be to enhance the existing depressions. This wetland continues East but was delineated at the Cape Blanco/Sixes quad.</i>												
22	Cape Blanco	Lower Sixes Mainstem	7	N	PEMA	PEMC	PSSA		R	MOD	N	B
23	Sixes	Lower Sixes Mainstem	105	N	PEMA	PFOA	PEMC	PEMCx	AG	HIGH	Y	R

Table 27 Sixes River Wetland Attributes

Wetland ID	7.5 Minute Quad	Subwatershed	Acres	Connected	Cowardin Code	Cowardin Code	Cowardin Code	Cowardin Code	Buffer	Degree of Alteration	Field	Color Code
<i>Comments: comprised of varying terrain: some depressions, old channels</i>												
24	Sixes	Lower Sixes Mainstem	18	Y	PFOA	PEMA			AG	LOW-MOD	N	B
25	Sixes	Lower Sixes Mainstem	2	Y	PEMA				FO	LOW	N	B
26	Sixes	Lower Sixes Mainstem	90	N	PEMA				AG	MOD-HIGH	N	G
	<i>Comments: mostly drained agricultural land; a small stream runs along south perimeter (of quad) connected to #21 on the Cape Blanco quad</i>											
27	Sixes	Lower Sixes Mainstem	6	N	PEMC				AG	HIGH	N	B
	<i>Comments: two separate sites in close proximity within #26; one is a depression with restoratio potential</i>											
28	Sixes	Lower Sixes Mainstem	3	Y	PSSA	PEMA			R	LOW	N	R
	<i>Comments: two small separate sites</i>											
29	Sixes	Lower Sixes Mainstem	5	N	PEMF				D	HIGH	N	G
	<i>Comments: converted to cranberry bogs</i>											
30	Sixes	Lower Sixes Mainstem	75	Y	PEMC	PFOA	PEMA	PEMF	AG	MOD-HIGH	N	G
31	Sixes	Lower Sixes Mainstem	35-40	Y	PSSC	PEMC			FO	LOW	N	B
	<i>Comments: converted to cranberry bogs</i>											
32	Sixes	Lower Sixes Mainstem	4	Y	PSSC				D	HIGH	N	R
33	Sixes	Lower Sixes Mainstem	13	Y	PSSC	PSSA	PEMA		FO	LOW	N	G
34	Sixes	Lower Sixes Mainstem	3	Y	PUBHx				R	HIGH	N	R
	<i>Comments: converted into two ponds</i>											
35	Sixes	Lower Sixes Mainstem	6	Y	PSSA				D	HIGH	N	R
	<i>Comments: converted into cranberry bogs</i>											

Table 27 Sixes River Wetland Attributes

Wetland ID	7.5 Minute Quad	Subwatershed	Acres	Connected	Cowardin Code	Cowardin Code	Cowardin Code	Cowardin Code	Buffer	Degree of Alteration	Field	Color Code
36	Sixes	Lower Sixes Mainstem	3	Y	PSSC				FO	LOW	N	R
37	Sixes	Crystal	45	N	PEMA	PSSA	PSSC	PEMC	R	MOD-HIGH	N	B
<i>Comments: partially converted to cranberry bogs</i>												
38	Sixes	Crystal	55	Y	PEMC	PEMA	PEMCx		AG	MOD-HIGH	N	R
39	Sixes	Crystal	2.5	N	PEMA				AG	MOD-HIGH	N	G
40	Sixes	Beaver Area	6	N	PSSA	PEMA			FO	LOW	N	G
41	Sixes	Beaver Area	3	N	PEMA				FO	LOW-MOD	N	R
42	Sixes	Beaver Area	4	N	PEMA				AG	MOD-HIGH	N	G
43	Sixes	Beaver Area	6	U	PEMA				AG	MOD-HIGH	N	B
44	Sixes	Beaver Area	3	Y	PEMF	PEMC	PFOA					

***NOTE:** The larger wetlands delineated on the index that lie on the plateau North of Sixes River, on the Cape Blanco quad, appear to all have been converted into cranberry bogs. It is difficult to interpret the existing conditions.

Table 32 Curve Number and Runoff-Depth Summary Table for Primary/Secondary Hydrologic Soil Groups

1 Subwatershed	2 Primary / Secondary Hydrologic Soil Group	3 Cover Type/Treatment	4 Hydrologic Condition	5 Curve Number	6 Background Curve Number	7 Rainfall Depth (in)	8 Current Runoff Depth (in)	9 Background Runoff Depth (in)	10 Change From Background Col. 8-9
Lower Sixes Mainstem	C - Primary	Pasture, grassland or range - confined forage for grazing	Good	74	70	7.25	4.15	3.62	0.53
	B - Secondary	Pasture, grassland or range - confined forage for grazing	Good	61	55	7.25	2.6	2.12	0.48
	D - Secondary	Pasture, grassland or range - confined forage for grazing	Good	80	77	7.25	4.69	4.15	0.54
Crystal Creek	D - Primary	Pasture, grassland or range - confined forage for grazing	Good	80	77	8.125	5.63	5.04	0.59
	B - Secondary	Pasture, grassland or range - confined forage for grazing	Good	61	55	8.125	3.33	2.78	0.55
	C - Secondary	Pasture, grassland or range - confined forage for grazing	Good	74	70	8.125	5.04	4.46	0.58
Beaver Area	B - Primary	Pasture, grassland or range - confined forage for grazing	Good	61	55	8.125	3.33	2.78	0.55
	C - Secondary	Pasture, grassland or range - confined forage for grazing	Good	74	70	8.125	5.04	4.46	0.58
	D - Secondary	Pasture, grassland or range - confined forage for grazing	Good	80	77	8.125	5.63	5.04	0.59

Table 33 Runoff Curve Numbers for Other Agricultural Lands ¹

Cover Type	Hydrologic Condition	Curve Numbers for Hydrologic Soil Group			
		A	B	C	D
Pasture, grassland, or range -continuous forage for grazing ²	Poor	68	79	86	89
	Fair	49	69	79	84
	Good	39	61	74	80
Meadow -continuous grass; protected from grazing and generally mowed for hay	---	30	58	71	78
Brush -brush-weed-grass mixture with brush the major element ³	Poor	48	67	77	83
	Fair	35	56	70	77
	Good	30 ⁴	48	65	73
Woods -grass combination (orchard or tree farm) ⁵	Poor	57	73	82	86
	Fair	43	65	76	82
	Good	32	58	72	79
Woods ⁶ - Shaded area can be used as background if the land was originally wooded	Poor	45	66	77	83
	Fair	36	60	73	79
	Good	30	55	70	77
Farmsteads -buildings, lanes, driveways, and surrounding lots	---	59	74	82	86

- 1 Average runoff condition and $I_a = 0.2 S$
- 2 Poor: <50% ground cover or heavily grazed with no mulch.
Fair: 50 to 75% ground cover and not heavily grazed.
Good: >75% ground cover and lightly or only occasionally grazed.
- 3 Poor: <50% ground cover.
Fair: 50 to 75% ground cover.
Good: >75% ground cover.
- 4 Actual curve number is less than 30; use curve number = 30 for runoff computations.
- 5 Curve numbers shown were computed for areas with 50% woods and 50% grass (pasture) cover.
Other combinations of conditions may be computed from the curve numbers for woods and pasture.
- 6 Poor: Forest litter, small trees, and brush are destroyed by heavy grazing or regular burning.
Fair: Woods are grazed but not burned, and some forest litter covers the soil.
Good: Woods are protected from grazing, and litter and brush adequately cover the soil.

Source: USDA Soil Conservation Service, TR55 (2nd edition, June 1986); Table 2-2b, page 2-6.

Table 34 Runoff Depth for Selected Curve Numbers and Rainfall Amounts¹

Runoff Depth for Curve Number of...													
Rainfall	40	45	50	55	60	65	70	75	80	85	90	95	98
1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.08	0.17	0.32	0.56	0.79
1.20	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.07	0.15	0.27	0.46	0.74	0.99
1.40	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.13	0.24	0.39	0.61	0.92	1.18
1.60	0.00	0.00	0.00	0.00	0.01	0.05	0.11	0.20	0.34	0.52	0.76	1.11	1.38
1.80	0.00	0.00	0.00	0.00	0.03	0.09	0.17	0.29	0.44	0.65	0.93	1.29	1.58
2.00	0.00	0.00	0.00	0.02	0.06	0.14	0.24	0.38	0.56	0.80	1.09	1.48	1.77
2.50	0.00	0.00	0.02	0.08	0.17	0.30	0.46	0.65	0.89	1.18	1.53	1.96	2.27
3.00	0.00	0.02	0.09	0.19	0.33	0.51	0.71	0.96	1.25	1.59	1.98	2.45	2.77
3.50	0.02	0.08	0.20	0.35	0.53	0.75	1.01	1.30	1.64	2.02	2.45	2.94	3.27
4.00	0.06	0.18	0.33	0.53	0.76	1.03	1.33	1.67	2.04	2.46	2.92	3.43	3.77
4.50	0.14	0.30	0.50	0.74	1.02	1.33	1.67	2.05	2.46	2.91	3.40	3.92	4.26
5.00	0.24	0.44	0.69	0.98	1.30	1.65	2.04	2.45	2.89	3.37	3.88	4.42	4.76
6.00	0.50	0.80	1.14	1.52	1.92	2.35	2.81	3.28	3.78	4.30	4.85	5.41	5.76
7.00	0.84	1.24	1.68	2.12	2.60	3.10	3.62	4.15	4.69	5.25	5.82	6.41	6.76
8.00	1.25	1.74	2.25	2.78	3.33	3.89	4.46	5.04	5.63	6.21	6.81	7.40	7.76
9.00	1.71	2.29	2.88	3.49	4.10	4.72	5.33	5.95	6.57	7.18	7.79	8.40	8.76
10.00	2.23	2.89	3.56	4.23	4.90	5.56	6.22	6.88	7.52	8.16	8.78	9.40	9.76
11.00	2.78	3.52	4.26	5.00	5.72	6.43	7.13	7.81	8.48	9.13	9.77	10.39	10.76
12.00	3.38	4.19	5.00	5.79	6.56	7.32	8.05	8.76	9.45	10.11	10.76	11.39	11.76
13.00	4.00	4.89	5.76	6.61	7.42	8.21	8.98	9.71	10.42	11.10	11.76	12.39	12.76
14.00	4.65	5.62	6.55	7.44	8.30	9.12	9.91	10.67	11.39	12.08	12.75	13.39	13.76
15.00	5.33	6.36	7.35	8.29	9.19	10.04	10.85	11.63	12.37	13.07	13.74	14.39	14.76

¹ Interpolate the values shown to obtain runoff depths for curve numbers or rainfall amounts not shown.

From USDA Soil Conservation Service, TR55 (2nd edition, June 1986) Table 2-1, page 2-3.

Table 35 Agriculture/Rangeland Risks of Peak Flow Enhancement

1 Subwatershed	2 Percent of Ag/Range Area in 1st Hydro Soil Group	3 Average Change from Background	4 Percent of Ag/Range Area in 2nd Hydro Soil Group	5 Average Change from Background	6 Percent of Ag/Range Area in 2nd Hydro Soil Group	7 Average Change from Background	8 Weighted Average Change from Background	9 Potential Risk of Peak Flow Enhancement
	Table 31 Col. 4 (A, B, C or D)	Table 32 Col. 10	Table 31 Col. 4 (A, B, C or D)	Table 32 Col. 10	Table 31 Col. 4 (A, B, C or D)	Table 32 Col. 10	(Cols. 2x3 + 4x5 + 6x7)	
Beaver Area	46.7%(B)	0.55	43.2%(C)	0.58	9.9%(D)	0.59	0.57	Moderate
Crystal Creek	70.4%(D)	0.59	14.7%(B)	0.55	15%(C)	0.58	0.58	Moderate
Lower Sixes Mainstem	40.3%(C)	0.53	31.1%(B)	0.48	28.7%(D)	0.54	0.52	Moderate

Table 40 Monthly Net Water Available by Water Availability Basin (cfs) (of 50% Exceedance)

Watershed ID#	Water Availability Basin	Stream	Tributary to	Location	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
70877	22000000	Sixes R.	Pacific O.	Mouth	414.0	541.0	447.0	110.0	-172.0	-79.0	-69.0	-72.0	-55.0	-183.0	17.0	457.0
70903	22010000	Crystal Cr	Sixes R	Mouth	16.0	25.0	19.0	-6.6	-172.0	-79.0	-69.0	-72.0	-55.0	-183.0	-7.9	18.0
31730627	22020000	Sixes R.	Pacific O.	Above Crystal Cr. @ Gage	414.0	541.0	447.0	110.0	-172.0	-79.0	-69.0	-72.0	-55.0	-188.0	17.0	457.0
70900	22021000	Edson Cr.	Sixes R.	Mouth	21.0	33.0	26.0	-4.9	-172.0	-79.0	-69.0	-72.0	-55.0	-188.0	-10.0	24.0
70878	22022000	Sixes R.	Pacific O.	Above Edson Cr.	327.0	419.0	359.0	110.0	-172.0	-79.0	-69.0	-72.0	-55.0	-188.0	17.0	354.0
70901	22022100	Dry Cr.	Sixes R.	Mouth	15.0	31.0	22.0	-19.0	-172.0	-79.0	-69.0	-72.0	-55.0	-188.0	-32.0	18.0
73215	22022200	Elephant Rock Cr.	Sixes R.	Mouth	8.7	15.0	12.0	-5.6	-172.0	-79.0	-69.0	-72.0	-55.0	-188.0	-11.0	9.5
70881	22022300	S. Fk. Sixes R.	Sixes R.	Mouth	13.0	28.0	22.0	-15.0	-172.0	-79.0	-69.0	-72.0	-55.0	-188.0	-31.0	16.0
70879	22022400	Sixes R.	Pacific O.	Above S. Fk. Sixes R.	153.0	199.0	169.0	52.0	-172.0	-79.0	-69.0	-72.0	-55.0	-188.0	5.0	163.0
73214	22022410	Otter Cr.	Sixes R.	Mouth	-9.8	-9.8	-8.3	-4.2	-172.0	-79.0	-69.0	-72.0	-55.0	-188.0	-5.5	-12.0
70888	22022420	M. Fk. Sixes R.	Sixes R.	Mouth	36.0	43.0	39.0	21.0	-172.0	-79.0	-69.0	-72.0	-55.0	-188.0	5.0	37.0
70880	22022430	Sixes R.	Pacific O.	Above M. Fk. Sixes R.	50.0	70.0	56.0	4.0	-172.0	-79.0	-69.0	-72.0	-55.0	-188.0	-18.0	51.0
73213	22022431	Sugar Cr.	Sixes R.	Mouth	-4.2	-2.6	-3.7	-2.1	-172.0	-79.0	-69.0	-72.0	-55.0	-188.0	-18.0	-4.3
73212	22022432	N. Fk. Sixes R.	Sixes R.	Mouth	0.9	10.0	4.6	-15.0	-172.0	-79.0	-69.0	-72.0	-55.0	-188.0	-18.0	2.0
73211	22022433	Hays Cr.	Sixes R.	Mouth	-3.4	-0.7	-2.3	-4.0	-172.0	-79.0	-69.0	-72.0	-55.0	-188.0	-18.0	-3.6

Note: WAB = Water Availability Basin. WAB# 22000000 is similar in size and location to Lower Sixes Mainstem subwatershed.
Shaded area = water not available at 50% exceedance level.

Table 41 Streamflow Restoration Priority Areas

Watershed ID	WAB	Stream	Tributary To	Location	SUMMER			FALL		WINTER		SPRING	
					Priority	Needs	Optimism	Needs	Optimism	Needs	Optimism	Needs	Optimism
70877	22000000	Sixes R.	Pacific O.	Mouth	X	4	3	3	1	1	1	3	1
70903	22010000	Crystal Cr.	Sixes R.	Mouth	X	4	2	1	1	1	1	3	1
31730627	22020000	Sixes R.	Pacific O.	Abv. Crystal Cr @ Gage		2	1	2	1	1	1	2	1
70900	22021000	Edson Cr	Sixes R.	Mouth		1	1	1	1	1	1	1	1
70878	22022000	Sixes R.	Pacific O.	Above Edson Cr.		2	1	1	1	1	1	1	1
70901	22022100	Dry Cr.	Sixes R.	Mouth		1	1	1	1	1	1	1	1
73215	22022200	Elephant Rock Cr.	Sixes R.	Mouth		1	1	1	1	1	1	1	1
70881	22022300	S. Fk. Sixes R.	Sixes R.	Mouth		1	2	1	1	1	1	1	1
70879	22022400	Sixes R.	Pacific O.	Above S. Fk. Sixes R.		1	1	1	1	1	1	1	1
73214	22022410	Otter Cr.	Sixes R.	Mouth		1	1	1	1	1	1	1	1
70888	22022420	M. Fk. Sixes R.	Sixes R.	Mouth		1	1	1	1	1	1	1	1
70880	22022430	Sixes R.	Pacific O.	Above M. Fk. Sixes R.		2	1	1	1	1	1	1	1
73213	22022431	Sugar Cr.	Sixes R.	Mouth		1	1	1	1	1	1	1	1
73212	22022432	N. Fk. Sixes R.	Sixes R.	Mouth		1	1	1	1	1	1	1	1
73211	22022433	Hays Cr.	Sixes R.	Mouth		1	1	1	1	1	1	1	1

Notes:

WAB = Water Availability Basin

Shaded Area = Priority WAB

WAB # 22000000 is similar in size and location to the Lower Sixes Mainstem subwatershed.

WAB # 22010000 is similar in size and location to the Crystal Creek subwatershed.

There are no priorities for fall, winter, or spring.

Table 36 Forest Road Area Summary

1	2	3	4	5	6	7	8
Subwatershed	Area (square miles)	Forested Area (acres)	Forested Area (square miles)	Total Linear Distance of Forest Roads (miles)	Roaded Area Col. 5 x *Std. Width (square miles)	Percent Area in Roads Col. 6/4*100	Relative Potential for Impact
Beaver Area	8.2	4,258	6.7	15.1	0.07	1.1	Low
Big & Otter Area	10.7	6,842	10.7	31.0	0.15	1.4	Low
Crystal Creek	8.5	4,614	7.2	21.8	0.10	1.4	Low
Dry Creek	16.0	10,016	15.7	20.6	0.10	0.6	Low
Edson Creek	10.8	6,627	10.4	25.6	0.12	1.2	Low
Elephant Rock Area	16.9	10,648	16.6	53.4	0.25	1.5	Low
Lower Sixes Mainstem	9.1	2,686	4.2	4.7	0.02	0.5	Low
Middle Fork Sixes	7.7	4,938	7.7	9.6	0.05	0.6	Low
North Fork Sixes	16.9	10,751	16.8	36.6	0.17	1.0	Low
South Fork Sixes	15.1	9,640	15.1	23.5	0.11	0.7	Low
Upper Sixes Mainstem	14.0	8,265	12.9	20.1	0.09	0.7	Low
Totals	133.9	79,285	123.9	261.9	1.23	1.0	

*Standard Width for Forest Roads = 25 feet (.0047 miles)

Table 37 Rural Road Summary

1	2	3	4	5	6	7	8
Subwatershed	Area (square miles)	Rural Area (Ag + Range) (acres)	Rural Area (Ag + Range) (square miles)	Total Linear Distance of Forest Roads (miles)	Roaded Area Col. 5 x *Std. Width (square miles)	Percent Area in Roads Col. 6/4*100	Relative Potential for Impact
Beaver Area	8.2	848	1.3	7.3	0.05	3.6	Low
Big & Otter Area	10.7	0	0.0	0.0	0.00	0.0	NA
Crystal Creek	8.5	852	1.3	5.4	0.04	2.7	Low
Dry Creek	16.0	208	0.3	2.7	0.02	5.5	Moderate
Edson Creek	10.8	292	0.5	1.0	0.01	1.4	Low
Elephant Rock Area	16.9	82	0.1	0.7	0.00	3.5	Low
Lower Sixes Mainstem	9.1	2,948	4.6	10.9	0.07	1.6	Low
Middle Fork Sixes	7.7	0	0.0	0.0	0.00	0.0	NA
North Fork Sixes	16.9	69	0.1	0.4	0.00	2.6	Low
South Fork Sixes	15.1	0	0.0	0.0	0.00	0.0	NA
Upper Sixes Mainstem	14.0	678	1.1	1.0	0.01	0.6	Low
Totals	133.9	5,977	9.3	29.3	0.19	2.1	

*Standard Width for Rural Roads = 25 feet (.0066 miles)